


ROW		POS
a	b	
⊗	×	1
×	×	2
×	×	3
×	×	4
×	×	5
×	×	6
×	×	7
×	×	8
×	×	9
×	×	10
×	×	11
×	×	12
×	×	13
×	×	14
×	×	15
×	×	16
×	×	17
×	×	18
×	×	19
×	×	20
×	×	21
×	×	22
×	×	23
×	×	24
×	×	25
×	×	26
×	×	27
×	×	28
×	×	29
×	×	30
×	×	31
⊗	×	32

- 1 HOUSING: GLASS FILLED THERMOPLASTIC
CONTACTS: COPPER ALLOY
- 2 PLATING:
CONTACT AREA: PERFORMANCE LEVEL 2 ACC. TO DIN 41612
SOLDERING AREA: TIN OVER NICKEL
- 3 CONTACT ARRANGEMENTS:
AN ASTERISK "X" DENOTES A SIGNAL CONTACT.
AN ASTERISK "⊗" DENOTES KINKED A SIGNAL CONTACT.
- 4 KINKED POSTS

5. SOLDER POSTS SUITABLE FOR 1,0 NOM. P.C.B. HOLES
6. CONNECTOR PRINTED WITH PARTNUMBER AND DATECODE

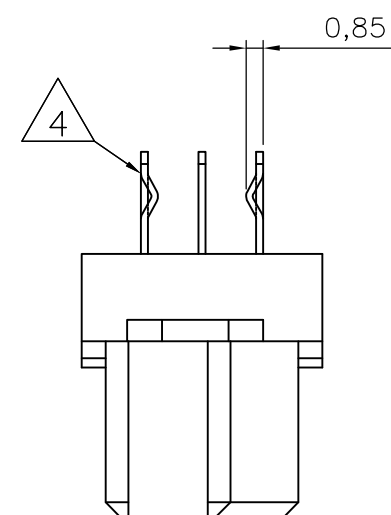

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN RAVINDRA K		15MAR11		 TE Connectivity	
		CHK MARCIN KOMAR		07APR11			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD STEFAN HABERSTROH		NAME	
		0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± — 4 PLC ± — ANGLES ± —		PRODUCT SPEC —		96P.IEC-C FEM.CONN. ACC. DIN 41612 WITH SOLDER POSTS 1,6mm P.C.BOARD THICKNESS	
MATERIAL		FINISH		APPLICATION SPEC —		RESTRICTED TO	
—		—		WEIGHT —		SIZE A2	
				CAGE CODE 00779		DRAWING NO G=2173044	
				CUSTOMER DRAWING		SCALE NTS	
						SHEET 1 of 1	
						REV A	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2173044-4](#)