
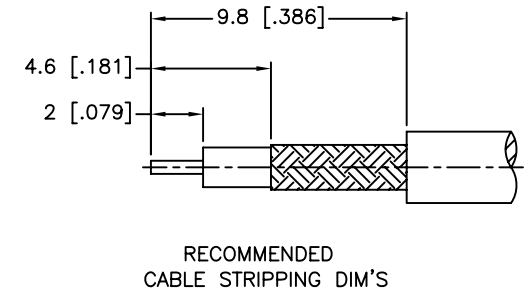




REV.	DATE	ECR NO.	DESCRIPTION
A	04/31/03	XXXXXX	UPDATE DRAWING FORMAT
B	06/20/11	2184	REMOVE THE WORD "BULKHEAD" FROM THE DESCRIPTION

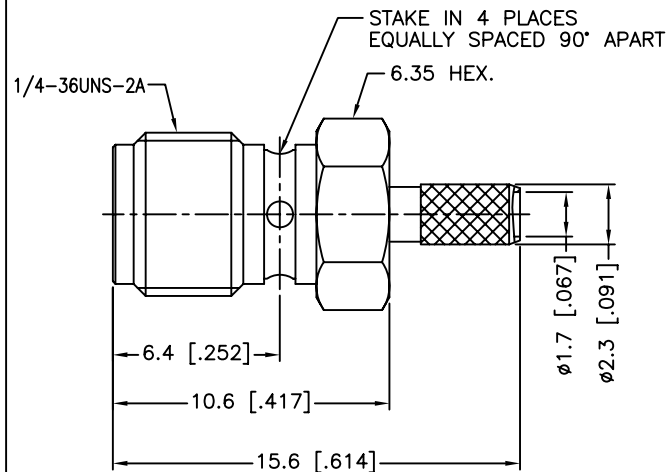

NOTE:
1. CRIMPED FERRULE
HEX CRIMP SIZE 128"
2. CONTACT PIN TO SOLDER

4	FERRULE	COPPER	GOLD	1
3	CONTACT PIN	BER. COPPER	GOLD	1
2	INSULATOR	PTFE	NATURAL	1
1	BODY	BRASS	GOLD	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS	DATE
	DRAWN M.ZHANG	06/20/11
	CHECKED	
	ISSUED	
	SHEET 1 OF 1	
	CAD FILE C:/CONNEX/132229.DWG	

Amphenol Connex			
PART DESCRIPTION			
SMA CRIMP JACK (FOR RG-174/U,188A/U,316/U CABLE)			
PART NO.			
132229			
DWG. NO.	132229.DWG	REV. B	SIZE A
		SCALE	NA

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[132229](#)