



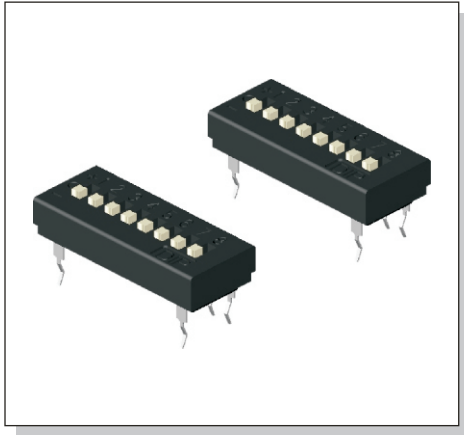

HOW TO ORDER

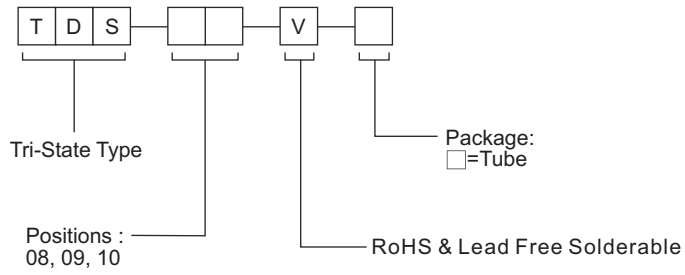

SPECIFICATION

MECHANICAL

Operation Force: 1000gf max.
Stroke: 1.0mm

ENVIRONMENTAL

Operation Temperature Range: -20°C to +70°C
Storage Temperature Range: -40°C to +85°C


ELECTRICAL

Electrical Life: 2,000 operations.
Non-Switching Rating: 100mA, 50VDC,
Switching Rating: 25mA, 24VDC


PACKAGE

TDS-08: 19 pcs/tube
TDS-09: 17 pcs/tube
TDS-10: 16 pcs/tube




CIRCUIT



TDS

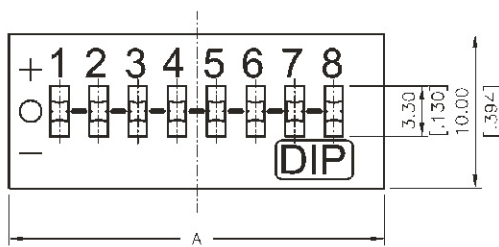

TDS-10	10	29.38[1.157]	22.86[.900]
TDS-09	9	26.84[1.057]	20.32[.800]
TDS-08	8	24.30[.957]	17.78[.700]
PROD. NO.	NO. OF POS.	DIM. A	DIM. B

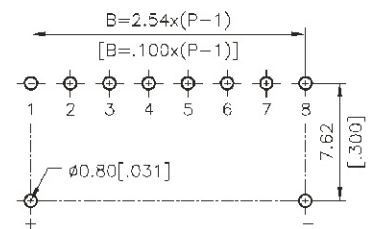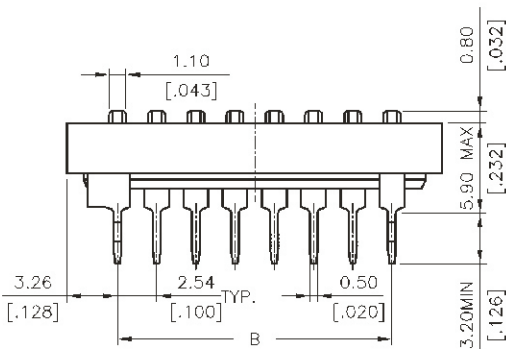

P.C.B. LAYOUT

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Apem:](#)

[TDS08](#)