

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	F	REVISED PER ECO-18-013177	21AUG2018	TZ	DZ

D

C

B


A

D



C

B


A

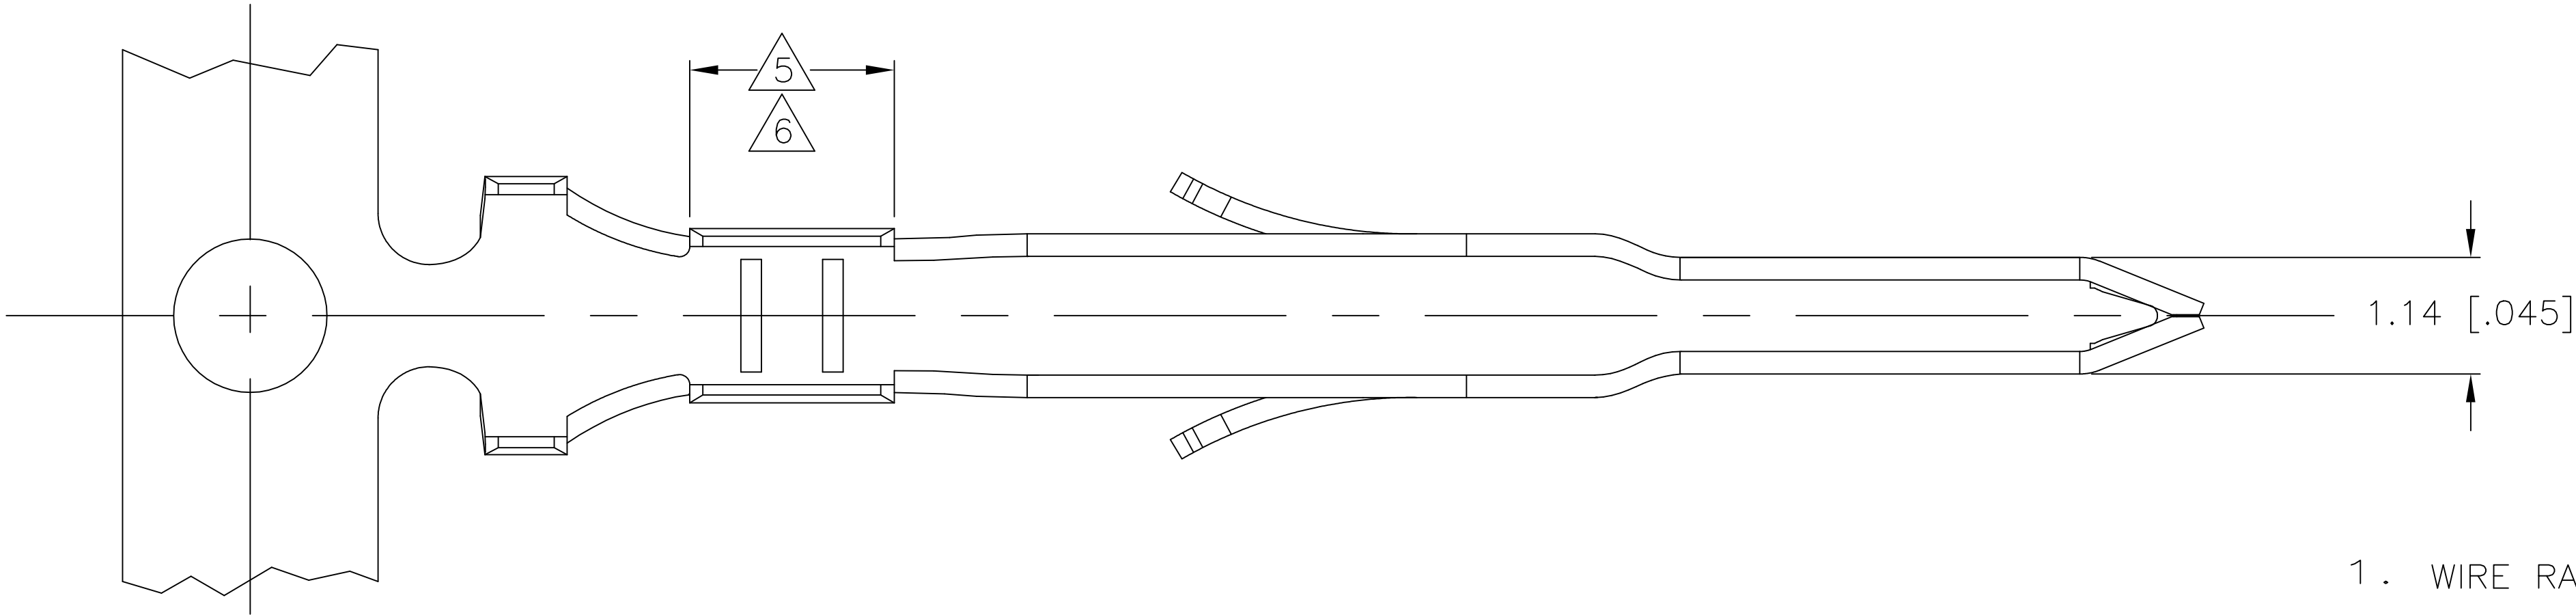

- 1. WIRE RANGE: 0.12–0.35mm² (26–22 AWG).
- 2. INSULATION RANGE: 1.20–1.75 DIA.
- 3 FINISH: 0.76μm MINIMUM GOLD OVER 1.27μm MINIMUM NICKEL REQUIRED
- 4 FINISH: NICKEL BASE PLATE ON ALL SURFACES IN THIS AREA.
- 5 FINISH: 2.54μm MINIMUM TIN-LEAD ON ALL SURFACES IN THIS AREA.
- 6 FINISH: 2.54μm MINIMUM TIN ON ALL SURFACES IN THIS AREA.
- 7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

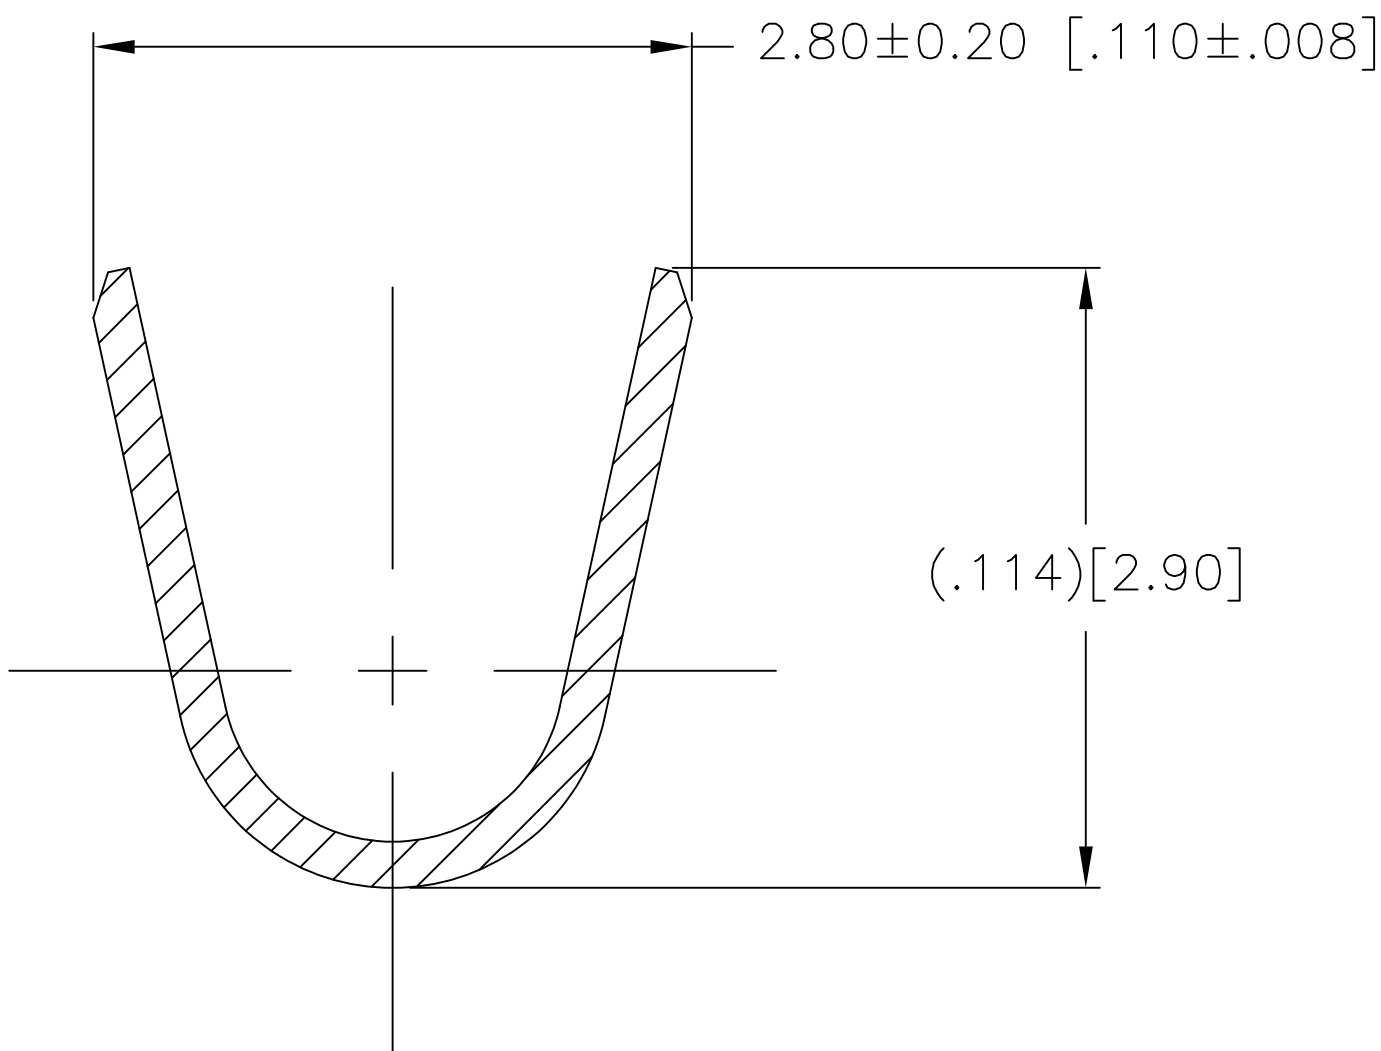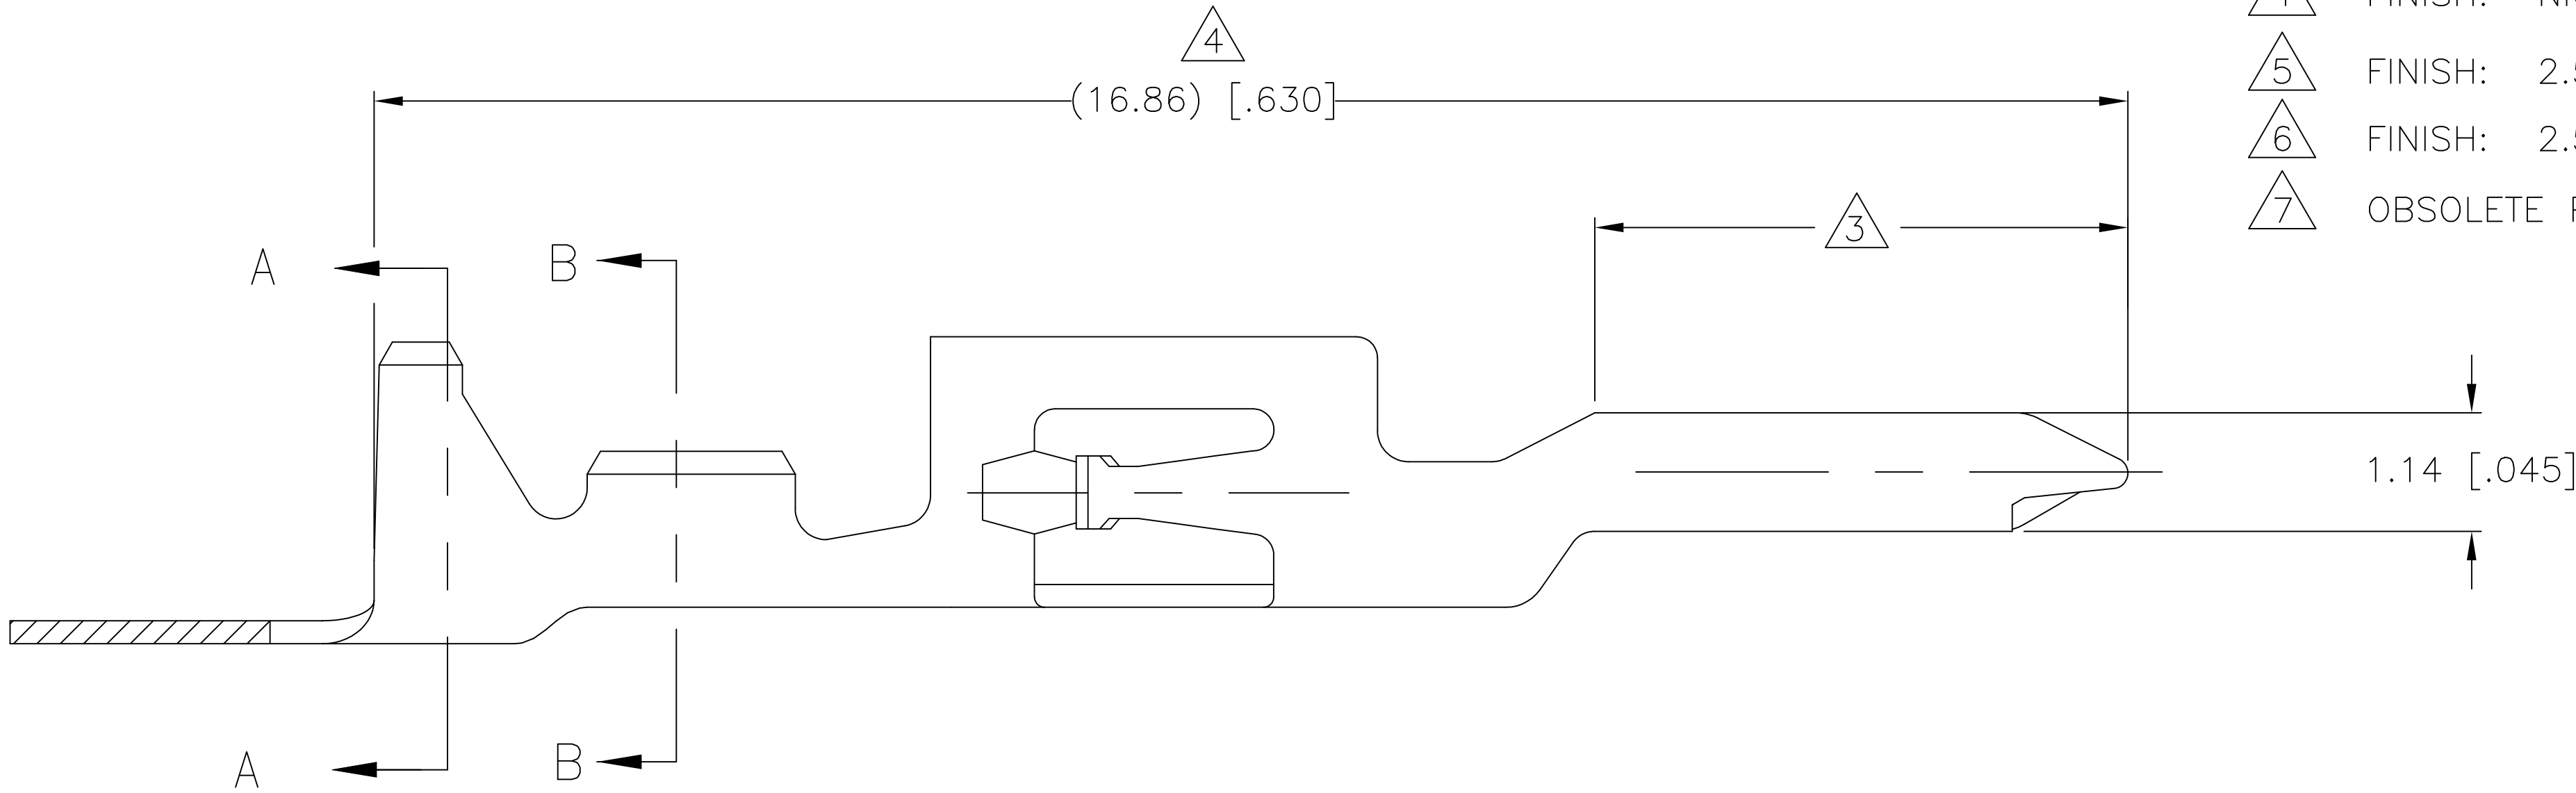

SECTION A—A
SCALE 20:1

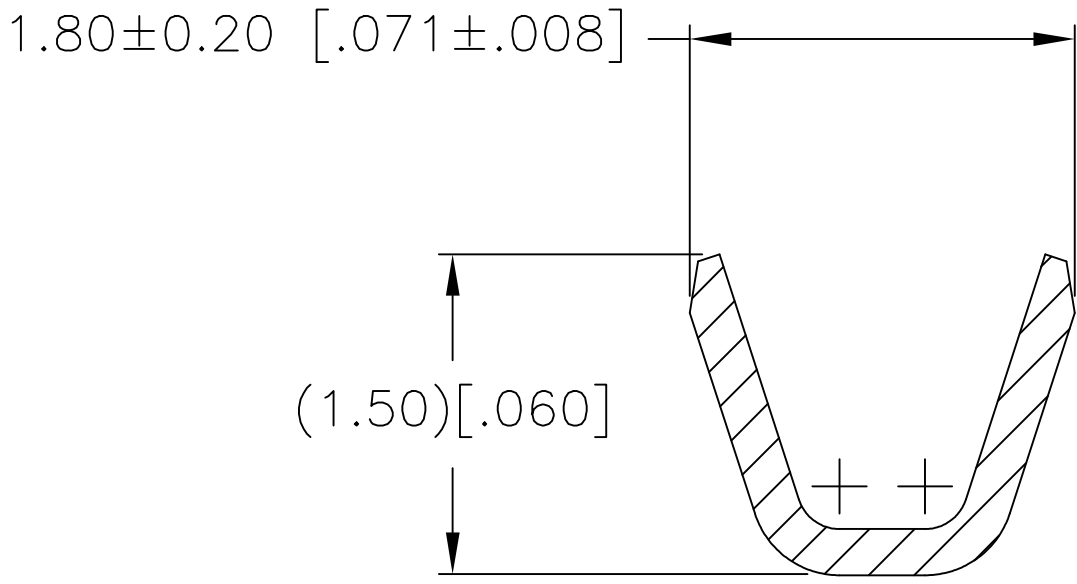

SECTION B—B
SCALE 20:1

7	SUPERCEDED	3 4 6	0.22 [.009] PHOS BRONZE	794578-4
		3 4 5	0.22 [.009] PHOS BRONZE	794578-2
		PRE-TIN	0.22 [.009] PHOS BRONZE	794578-1
		FINISH	MATERIAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. HAMM 18-FEB-2002		 TE Connectivity	
		CHK D. COLEY 18-FEB-2002			
DIMENSIONS: mm [INCHES]		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		NAME CONTACT, MALE, AMP-DUAC(TM) POWER CONNECTOR	
		APVD D. COLEY 18-FEB-2002			
		PRODUCT SPEC 108-1646			
		APPLICATION SPEC 114-6067			
MATERIAL 0.22 [.009]PH BRZ		0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±		SIZE	
		FINISH		CAGE CODE	
		SEE TABLE		DRAWING NO	
		WEIGHT 0		RESTRICTED TO —	
CUSTOMER DRAWING				A2 00779 C=794578	
				SCALE 14:1	
				SHEET 1 of 1	
				REV F	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[794578-4](#)