



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	REV, RDRW, & SM PKG PER 0720-0040-93	9-26-93	TAB	DAP
	B1	REVISED PER ECO-17-008808	03MAR2018	RS	DR

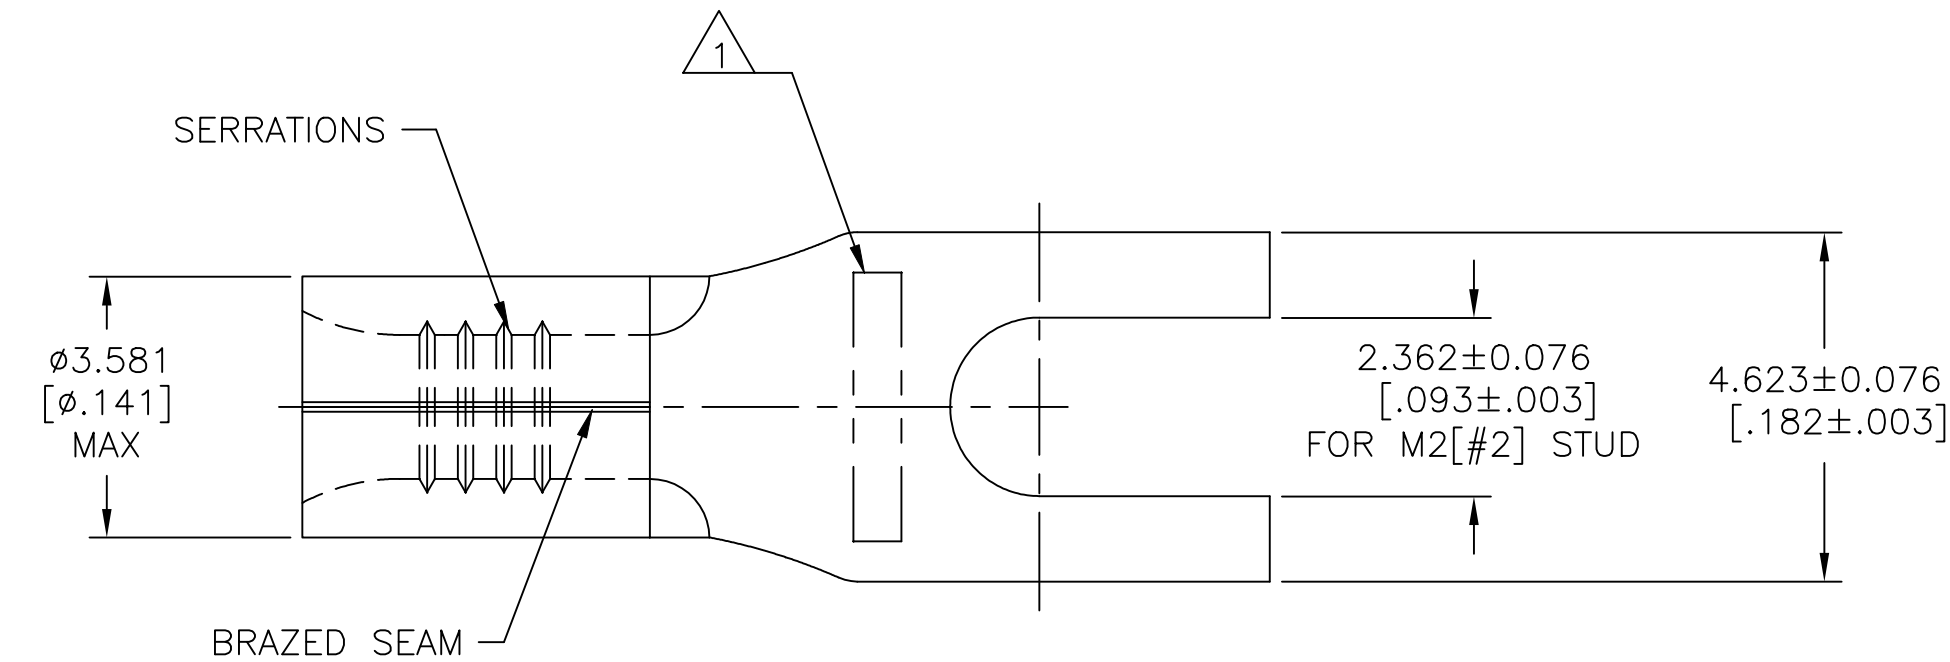

AMP WIRE RANGE	E13288 Listed
22-16 AWG SOLID OR STRANDED	22-16 AWG SOLID OR STRANDED
LR7189 Certified	MILITARY P/N AND CLASS
22-16 AWG SOLID OR STRANDED	NOT APPLICABLE

1 STAMP AMP 22-18* APPROX AS SHOWN
22-16 TERMINALS ARE STAMPED 22-18 IN
ACCORDANCE WITH MILITARY SPECIFICATION
SAE AS7928, COMMERCIAL WIRE RANGE IS 22-16

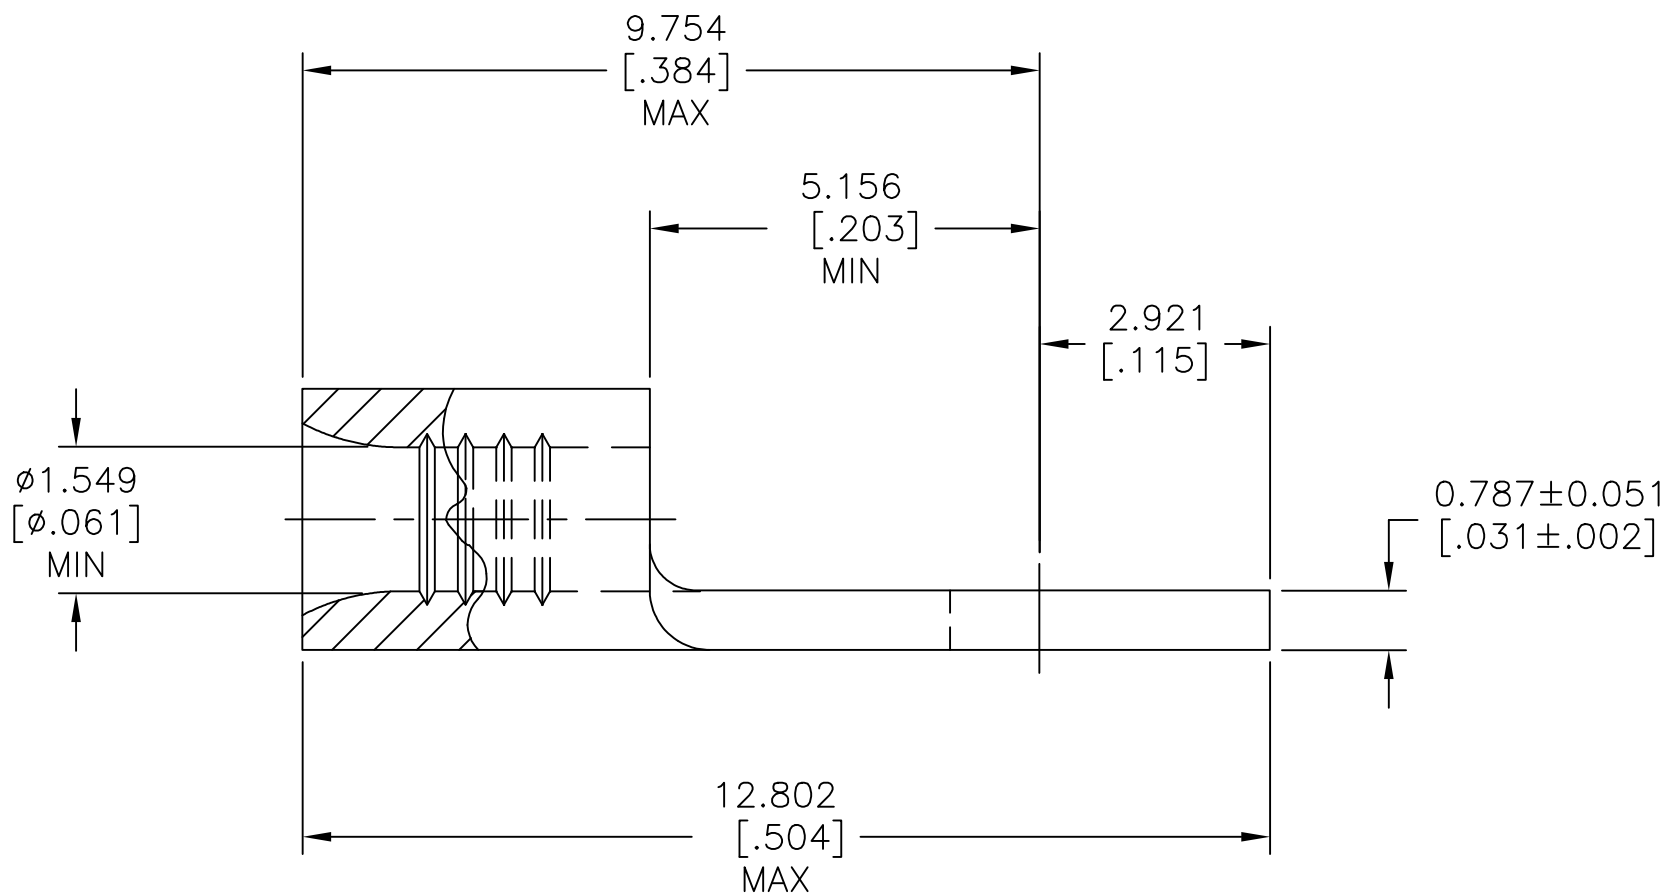

100	LOOSE PIECE, BOX	8-53555-1
1000	LOOSE PIECE	53555-1
QUANTITY	PACKAGING TYPE	PART NO

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS			THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN TA BRINKMAN 3-26-93 CHK DA PATTERSON 3-26-93 APVD DE MILLER 3-26-93 PRODUCT SPEC UL 486 A-B APPLICATION SPEC — WEIGHT — CUSTOMER DRAWING		TE Connectivity Ltd. NAME TERMINAL, SPADE TONGUE, SOLISTRAND™ 22-16 AWG SIZE A2 CAGE CODE 00779 DRAWING NO C=53555 SCALE 10:1 SHEET 1 of 1 REV B1			
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	MAX RECOMMENDED OPERATING TEMPERATURE: 170°C [338°F] MAX	DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± 0.127[.005] 4 PLC ± — ANGLES ± —	NAME	TERMINAL, SPADE TONGUE, SOLISTRAND™ 22-16 AWG	SIZE A2	CAGE CODE 00779	DRAWING NO C=53555	RESTRICTED TO —
FOR APPLICATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	VOLTAGE RATING: NOT APPLICABLE	MATERIAL COPPER PER ASTM B-152 ANNEALED		FINISH TIN PLATE 0.00254[.000100] MIN THK PER ASTM B545						
TOOLING INFORMATION	1-800-722-1111	WIRE CROSS SECTIONAL AREA RANGE, 0.26-1.65mm²[509-3,260] CIR MILS SOLID OR STRANDED									
FOR ORDER ENTRY	1-800-526-5142										

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[53555-2](#)