

TPS6132x 1.5-A to 4.1-A Multiple LED Camera Flash Driver With I²C Compatible Interface

1 Features

- Four Operational Modes
 - DC-Light and Flashlight
 - Voltage Regulated Converter: 3.8 V to 5.7 V
 - Standby: 2 μ A (Typical)
- Storage Capacitor Friendly Solution
- Automatic V_F and ESR Calibration
- Power-Save Mode for Improved Efficiency at Low Output Power, Up to 95% Efficiency
- Output Voltage Remains Regulated When Input Voltage Exceeds Nominal Output Voltage
- I²C Compatible Interface up to 3.4 Mbps
- Dual Wire Camera Module Interface
- Zero Latency Tx-Masking Input
- LED Temperature Monitoring
- Privacy Indicator LED Output
- Integrated LED Safety Timer
- GPIO/Flash Ready Output
- Total Solution Size of Less Than 25 mm² (< 1-mm height)
- Available in a 20-Pin NanoFreeTM (DSBGA)

2 Applications

- Single, Dual, or Triple White LED Flashlight Supply for Cell Phones and Smart-Phones
- LED Based Xenon Killer Flashlight

3 Description

The TPS6132x device is based on a high-frequency synchronous boost topology with constant current sinks to drive up to three white LEDs in parallel (445-mA, 890-mA, 445-mA maximum flash current). The extended high-current mode (HC_SEL) allows up to 1025-mA, 2050-mA, and 1025-mA flash current out of the storage capacitor.

The high-capacity storage capacitor on the output of the boost regulator provides the high-peak flash LED current, thereby reducing the peak current demand from the battery to a minimum.

The 2-MHz switching frequency allows the use of small and low profile 2.2- μ H inductors. To optimize overall efficiency, the device operates with a 400-mV LED feedback voltage.

The TPS6132x device not only operates as a regulated current source, but also as a standard voltage boost regulator. The device keeps the output voltage regulated even when the input voltage exceeds the nominal output voltage. The device enters power-save mode operation at light load currents to maintain high efficiency over the entire load current range.

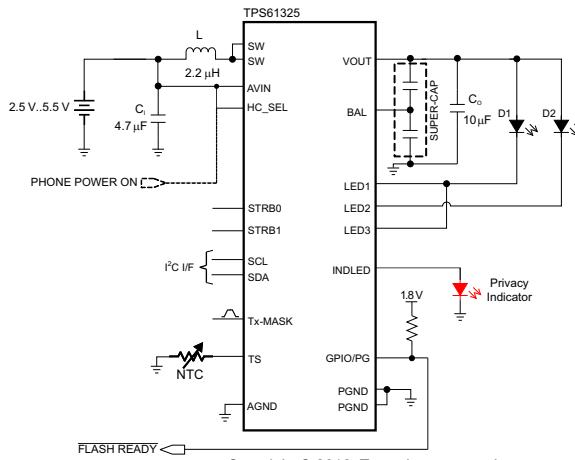
To simplify DC-light and flashlight synchronization with the camera module, the device offers a dedicated control interface (STRB0 and STRB1 pins) for zero latency LED turnon time.

Device Information⁽¹⁾

| PART NUMBER | PACKAGE | BODY SIZE (NOM) |
|-------------|------------|-------------------|
| TPS6132x | DSBGA (20) | 2.20 mm x 1.96 mm |

(1) For all available packages, see the orderable addendum at the end of the data sheet.

Typical Application Schematic



Copyright © 2016, Texas Instruments Incorporated



An IMPORTANT NOTICE at the end of this data sheet addresses availability, warranty, changes, use in safety-critical applications, intellectual property matters and other important disclaimers. PRODUCTION DATA.

Table of Contents

| | | | | | |
|----------|---|-----------|-----------|---|-----------|
| 1 | Features | 1 | 9.5 | Programming..... | 35 |
| 2 | Applications | 1 | 9.6 | Register Maps..... | 36 |
| 3 | Description | 1 | 10 | Application and Implementation | 45 |
| 4 | Revision History | 2 | 10.1 | Application Information..... | 45 |
| 5 | Device Comparison Table | 3 | 10.2 | Typical Applications | 45 |
| 6 | Pin Configuration and Functions | 3 | 11 | Power Supply Recommendations | 54 |
| 7 | Specifications | 4 | 12 | Layout | 55 |
| | 7.1 Absolute Maximum Ratings | 4 | 12.1 | Layout Guidelines | 55 |
| | 7.2 ESD Ratings..... | 4 | 12.2 | Layout Example | 55 |
| | 7.3 Recommended Operating Conditions..... | 5 | 12.3 | Thermal Considerations..... | 55 |
| | 7.4 Thermal Information | 5 | 13 | Device and Documentation Support | 57 |
| | 7.5 Electrical Characteristics..... | 5 | 13.1 | Device Support..... | 57 |
| | 7.6 Timing Requirements | 7 | 13.2 | Documentation Support | 57 |
| | 7.7 Typical Characteristics | 9 | 13.3 | Receiving Notification of Documentation Updates | 57 |
| 8 | Parameter Measurement Information | 16 | 13.4 | Community Resources..... | 57 |
| 9 | Detailed Description | 17 | 13.5 | Trademarks..... | 57 |
| | 9.1 Overview | 17 | 13.6 | Electrostatic Discharge Caution | 57 |
| | 9.2 Functional Block Diagram..... | 18 | 13.7 | Glossary | 57 |
| | 9.3 Feature Description..... | 19 | 14 | Mechanical, Packaging, and Orderable | 57 |
| | 9.4 Device Functional Modes..... | 30 | | Information | |

4 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

| Changes from Revision A (October 2010) to Revision B | Page |
|--|------|
| • Added <i>ESD Ratings</i> table, <i>Feature Description</i> section, <i>Device Functional Modes</i> , <i>Application and Implementation</i> section, <i>Power Supply Recommendations</i> section, <i>Layout</i> section, <i>Device and Documentation Support</i> section, and <i>Mechanical, Packaging, and Orderable Information</i> section | 1 |
| • Changed <i>Ordering Information Table</i> to <i>Device Comparison Table</i> ; see POA at the end of the datasheet | 1 |

| Changes from Original (February 2010) to Revision A | Page |
|--|------|
| • Added TPS61326 device as Product Preview..... | 3 |
| • Changed I_{STBY} specification, max value from 5 μ A to 12 μ A..... | 5 |
| • Changed V_{DO} specification, max. value from 200 mV to 250 mV for Test Condition $I_{OUT} = -15.8$ mA, $T_J = 25^\circ\text{C}$, device not switching. | 6 |


5 Device Comparison Table

| PACKAGE MARKING | DEVICE SPECIFIC FEATURES ⁽¹⁾ |
|-------------------------|--|
| TPS61325 | Dual-Wire Camera Module Interface (STRB0 and STRB1) LED Temperature Monitoring Input (TS) Device I ₂ C Address = 0x33 |
| TPS61326 ⁽²⁾ | Dual-Wire Camera Module Interface (STRB0 and STRB1) LED Temperature Monitoring Input (TS) Device I ₂ C Address = 0x32 |

(1) For more details, see [Feature Description](#).

(2) Device status is Product Preview. Contact TI for more details.

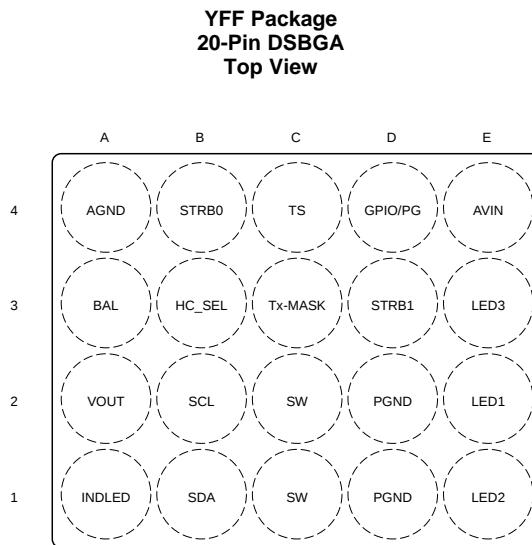6 Pin Configuration and Functions



Pin Functions

| PIN | | I/O | DESCRIPTION |
|---------|-----------|-----|---|
| NAME | NO. | | |
| AGND | A4 | — | Analog ground. |
| AVIN | E4 | I | The input voltage pin of the device. Connect directly to the input bypass capacitor. |
| BAL | A3 | O | Balancing output for dual cells super-capacitor. In steady-state operation, this output compensates for leakage current mismatch between the cells. |
| GPIO/PG | D4 | I/O | This pin can be configured as a general purpose input and output pin (GPIO), an open-drain, or a push-pull output to signal when the converters output voltage is within the regulation limits (PG). The pin is configured as an open-drain power-good output by default. |
| HC_SEL | B3 | I | Extended high-current mode selection input. This pin must not be left floating and must be terminated. HC_SEL = LOW: LED direct drive mode. The power stage is active and the maximum LED currents are defined as 445 mA, 890 mA, 445 mA. HC_SEL = HIGH: Energy storage mode. In flash mode, the power stage is either active with reduced current capability or disabled. The maximum LED current is defined as 1025 mA, 2050 mA, 1025 mA. |
| INDLED | A1 | O | This pin provides a constant current source to drive low V _F LEDs. Connect to LED anode. |
| LED1 | E2 | I | LED return input. This feedback pin regulates the LED current through the internal sense resistor by regulating the voltage across it. The regulation operates with typically 400-mV (HC_SEL = L) or 400-mV (HC_SEL = H) dropout voltage. Connect to the cathode of the LEDs. |
| LED2 | E1 | I | LED return input. This feedback pin regulates the LED current through the internal sense resistor by regulating the voltage across it. The regulation operates with typically 400-mV (HC_SEL = L) or 400-mV (HC_SEL = H) dropout voltage. Connect to the cathode of the LEDs. |
| LED3 | E3 | I | |
| PGND | D1, D2 | — | Power ground. Connect to AGND underneath IC. |

Pin Functions (continued)

| PIN | | I/O | DESCRIPTION |
|---------|-----------|-----|--|
| NAME | NO. | | |
| STRB0 | B4 | I | LEDx enable logic input. This pin can be used to enable and disable the high-power LEDs connected to the device. STRB0 = LOW: LEDx current regulators are turned off. STRB0 = HIGH: LED2, LED2 and LED3 current regulators are active. The LED current level (DC-light or flashlight current) is defined according to the STRB1 logic level. |
| STRB1 | D3 | I | LED current level selection input. Pulling this input high disables the DC-light watchdog timer. STRB1 = LOW: Flashlight mode is enabled. STRB1 = HIGH: DC-light mode is enabled. |
| SCL | B2 | I | Serial interface clock line. This pin must not be left floating and must be terminated. |
| SDA | B1 | I/O | Serial interface address and data line. This pin must not be left floating and must be terminated. |
| SW | C1, C2 | I/O | Inductor connection. Drain of the internal power MOSFET. Connect to the switched side of the inductor. SW is high impedance during shutdown. |
| TS | C4 | I/O | NTC resistor connection. This pin can be used to monitor the LED temperature. Connect a 220-k Ω NTC resistor from the TS input to ground. In case this functionality is not desired, the TS input must be tied to AVIN or left floating. |
| Tx-MASK | C3 | I | RF PA synchronization control input. |
| VOUT | A2 | O | This is the output voltage pin of the converter. |

7 Specifications

7.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)⁽¹⁾

| | | MIN | MAX | UNIT |
|---|--|--------------------|----------|------|
| Voltage ⁽²⁾ | AVIN, VOUT, SW, LED1, LED2, LED3, SCL, SDA, STRB0, STRB1, GPIO/PG, HC_SEL, Tx-MASK, TS, and BAL pins | -0.3 | 7 | V |
| Current | GPIO/PG pin | | ± 25 | mA |
| Power dissipation | | Internally limited | | |
| Operating ambient temperature ⁽³⁾ , T _A | | -40 | 85 | °C |
| Maximum operating junction temperature, T _{J(MAX)} | | | 150 | °C |
| Storage temperature, T _{stg} | | -65 | 150 | °C |

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) All voltage values are with respect to network ground terminal.
- (3) In applications where high power dissipation and/or poor package thermal resistance is present, the maximum ambient temperature may have to be derated. Maximum ambient temperature (T_{A(max)}) is dependent on the maximum operating junction temperature (T_{J(max)}), the maximum power dissipation of the device in the application (P_{D(max)}), and the junction-to-ambient thermal resistance of the part/package in the application (R_{θJA}), as given by the following equation: T_{A(max)} = T_{J(max)} - (R_{θJA} × P_{D(max)})

7.2 ESD Ratings

| | | VALUE | UNIT |
|--------------------|-------------------------|--|------------|
| V _(ESD) | Electrostatic discharge | Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 ⁽¹⁾ | ± 2000 |
| | | Charged-device model (CDM), per JEDEC specification JESD22-C101 ⁽²⁾ | ± 500 |

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

7.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

| | | | MIN | NOM | MAX | UNIT |
|-----------|------------------------------------|-------------------------|----------|-----|-----|---------|
| V_{IN} | Input voltage | | 2.5 | 3.6 | 5.5 | V |
| V_{OUT} | Output voltage | Current regulation mode | V_{IN} | 5.5 | 5.7 | V |
| | | Voltage regulation mode | 3.825 | | | |
| L | Inductor | | 1.3 | 2.2 | 2.9 | μ H |
| C_{IN} | Input capacitor | | 10 | | | μ F |
| C_{OUT} | Output capacitor (effective value) | | 3 | 10 | | μ F |

7.4 Thermal Information

| THERMAL METRIC ⁽¹⁾ | | TPS61325 | UNIT |
|-------------------------------|--|-------------|----------------|
| | | YFF (DSBGA) | |
| | | 20 PINS | |
| $R_{\theta JA}$ | Junction-to-ambient thermal resistance | 75.9 | $^{\circ}$ C/W |
| $R_{\theta JC(\text{top})}$ | Junction-to-case (top) thermal resistance | 0.4 | $^{\circ}$ C/W |
| $R_{\theta JB}$ | Junction-to-board thermal resistance | 13.3 | $^{\circ}$ C/W |
| ψ_{JT} | Junction-to-top characterization parameter | 2 | $^{\circ}$ C/W |
| ψ_{JB} | Junction-to-board characterization parameter | 13.3 | $^{\circ}$ C/W |
| $R_{\theta JC(\text{bot})}$ | Junction-to-case (bottom) thermal resistance | — | $^{\circ}$ C/W |

(1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

7.5 Electrical Characteristics

Unless otherwise noted the specification applies for $V_{IN} = 3.6$ V over an operating junction temp. $-40^{\circ}\text{C} \leq T_J \leq 125^{\circ}\text{C}$; Circuit in [Parameter Measurement Information](#) (unless otherwise noted). Typical values are for $T_J = 25^{\circ}\text{C}$.

| PARAMETER | TEST CONDITIONS | MIN | TYP | MAX | UNIT | |
|-----------------------|---|--|----------|-----------------|-----------|----|
| SUPPLY CURRENT | | | | | | |
| V_{IN} | Input voltage range | 2.5 | 5.5 | | V | |
| I_Q | Operating quiescent current into AVIN | $I_{OUT} = 0$ mA, device not switching, $-40^{\circ}\text{C} \leq T_J \leq 85^{\circ}\text{C}$ | 590 | 700 | μ A | |
| | | $I_{OUT(DC)} = 0$ mA, PWM operation $V_{OUT} = 4.95$ V, voltage regulation mode | 11.3 | | mA | |
| I_{SD} | Shutdown current | HC_SEL = 0, $-40^{\circ}\text{C} \leq T_J \leq 85^{\circ}\text{C}$ | 1 | 5 | μ A | |
| I_{STBY} | Standby current | HC_SEL = 1, storage capacitor balanced $-40^{\circ}\text{C} \leq T_J \leq 85^{\circ}\text{C}$ | 2 | 12 | μ A | |
| | Precharge current | $0 \text{ V} \leq V_{OUT} \leq 3.3 \text{ V}$, device in precharge mode, $-40^{\circ}\text{C} \leq T_J \leq 85^{\circ}\text{C}$ | 80 | 180 | 220 | mA |
| | Precharge termination threshold | V_{OUT} rising, $-40^{\circ}\text{C} \leq T_J \leq 85^{\circ}\text{C}$ | | 3.35 | 3.6 | V |
| | Precharge hysteresis (referred to V_{OUT}) | | 40 | 75 | | mV |
| V_{UVLO} | Undervoltage lockout threshold (analog circuitry) | V_{IN} falling | | 2.3 | 2.4 | V |
| OUTPUT | | | | | | |
| V_{OUT} | Output voltage range | Current regulation mode | V_{IN} | 5.5 | V | |
| | | Voltage regulation mode | 3.825 | 5.7 | | |
| | Internal feedback voltage accuracy | $2.5 \text{ V} \leq V_{IN} \leq 4.8 \text{ V}$, $-20^{\circ}\text{C} \leq T_J \leq 125^{\circ}\text{C}$ Boost mode, PWM voltage regulation | -2% | 2% | | |
| | Power-save mode ripple voltage | $I_{OUT} = 10$ mA | | 0.015 V_{OUT} | V_{P-P} | |
| OVP | Output overvoltage protection | V_{OUT} rising, 0000 \leq OV \leq 0100 | 4.5 | 4.65 | 4.8 | |
| | | V_{OUT} rising, 0101 \leq OV \leq 1111 | 5.8 | 6 | 6.2 | |
| | Output overvoltage protection hysteresis | V_{OUT} falling, 0101 \leq OV \leq 1111 | | 0.15 | V | |

Electrical Characteristics (continued)

Unless otherwise noted the specification applies for $V_{IN} = 3.6$ V over an operating junction temp. $-40^\circ\text{C} \leq T_J \leq 125^\circ\text{C}$; Circuit in *Parameter Measurement Information* (unless otherwise noted). Typical values are for $T_J = 25^\circ\text{C}$.

| PARAMETER | TEST CONDITIONS | MIN | TYP | MAX | UNIT | |
|---|--|---|----------|----------|-----------------------------------|--|
| POWER SWITCH | | | | | | |
| $r_{DS(on)}$ | Switch MOSFET on-resistance | $V_{OUT} = V_{GS} = 3.6$ V | | 90 | $\text{m}\Omega$ | |
| | Rectifier MOSFET on-resistance | $V_{OUT} = V_{GS} = 3.6$ V | | 135 | $\text{m}\Omega$ | |
| $I_{lkq(SW)}$ | Leakage into SW | $V_{OUT} = 0$ V, SW = 3.6 V, $-40^\circ\text{C} \leq T_J \leq 85^\circ\text{C}$ | | 0.3 | 4 μA | |
| I_{lim} | Rectifier valley current limit (open-loop) | $V_{OUT} = 4.95$ V, HC_SEL = 0, $-20^\circ\text{C} \leq T_J \leq 85^\circ\text{C}$, PWM operation, ILIM bit = 0 | 775 | 1150 | 1600 | |
| | | $V_{OUT} = 4.95$ V, HC_SEL = 0, $-20^\circ\text{C} \leq T_J \leq 85^\circ\text{C}$, PWM operation, ILIM bit = 1 | 1050 | 1600 | 2225 | |
| | | $V_{OUT} = 4.95$ V, HC_SEL = 1, Tx-MASK = 0, $-20^\circ\text{C} \leq T_J \leq 85^\circ\text{C}$, PWM operation, ILIM bit = 0 | -85 | 30 | 150 | |
| | | $V_{OUT} = 4.95$ V, HC_SEL = 1, Tx-MASK = 0, $-20^\circ\text{C} \leq T_J \leq 85^\circ\text{C}$, PWM operation, ILIM bit = 1 | 175 | 250 | 300 | |
| OSCILLATOR | | | | | | |
| f_{OSC} | Oscillator frequency | | | 1.92 | MHz | |
| f_{ACC} | Oscillator frequency | | | -10% | 7% | |
| THERMAL SHUTDOWN, HOT DIE DETECTOR | | | | | | |
| Thermal shutdown | | | 140 | 160 | $^\circ\text{C}$ | |
| Thermal shutdown hysteresis | | | | 20 | $^\circ\text{C}$ | |
| Hot die detector accuracy | | | -8 | 8 | $^\circ\text{C}$ | |
| LED CURRENT REGULATOR | | | | | | |
| LED1 and LED3 current accuracy | HC_SEL = 0 | 0.4 V $\leq V_{LED1/3} \leq 2$ V, 0 mA $< I_{LED1/3} \leq 111$ mA, $T_J = 85^\circ\text{C}$ | -10% | 10% | | |
| | | 0.4 V $\leq V_{LED2} \leq 2$ V, $I_{LED1/3} > 111$ mA, $T_J = 85^\circ\text{C}$ | -7.5% | 7.5% | | |
| LED2 current accuracy | | 0.4 V $\leq V_{LED2} \leq 2$ V, 0 mA $< I_{LED2} \leq 250$ mA, $T_J = 85^\circ\text{C}$ | -10% | 10% | | |
| | | 0.4 V $\leq V_{LED2} \leq 2$ V, $I_{LED2} > 250$ mA, $T_J = 85^\circ\text{C}$ | -7.5% | 7.5% | | |
| LED1 and LED3 current accuracy | HC_SEL = 1 | 0.4 V $\leq V_{LED1/3} \leq 2$ V, 0 mA $< I_{LED1/3} \leq 1027$ mA, $T_J = 85^\circ\text{C}$ | -10% | 10% | | |
| LED2 current accuracy | | 0.4 V $\leq V_{LED2} \leq 2$ V, 0 mA $< I_{LED2} \leq 2052$ mA, $T_J = 85^\circ\text{C}$ | -10% | 10% | | |
| LED1 and LED3 current matching | HC_SEL = 0 | $V_{LED1/3} = 1$ V, $I_{LED1/3} = 444$ mA, $T_J = 85^\circ\text{C}$ | -7.5% | 7.5% | | |
| LEDx current temperature coefficient | | | | 0.05 | $^\circ\text{C}/\text{m}\text{A}$ | |
| INDLED current accuracy | | 1.5 V $\leq (V_{IN} - V_{INDLED}) \leq 2.5$ V, 0000 $\leq \text{INDC} \leq 0111$, $T_J = 25^\circ\text{C}$ | -20% | 20% | | |
| INDLED current temperature coefficient | | | | 0.04 | $^\circ\text{C}/\text{m}\text{A}$ | |
| V_{DO} | LEDx sense voltage | I_{LEDx} = full-scale current, HC_SEL = 0 | | 400 | | |
| | LEDx sense voltage | $I_{LED1/3}$ = full-scale current, HC_SEL = 1 | | 400 | 450 | |
| | VOUT dropout voltage | $I_{OUT} = -15.8$ mA, $T_J = 25^\circ\text{C}$, device not switching | | | 250 | |
| LEDx input leakage current | | $V_{LEDx} = V_{OUT} = 5$ V, $-40^\circ\text{C} \leq T_J \leq 85^\circ\text{C}$ | | 0.1 | 4 μA | |
| INDLED input leakage current | | $V_{INDLED} = 0$ V, $-40^\circ\text{C} \leq T_J \leq 85^\circ\text{C}$ | | 0.1 | 1 μA | |
| STORAGE CAPACITOR ACTIVE CELL BALANCING | | | | | | |
| Active cell balancing circuitry quiescent current into VOUT | | HC_SEL = 1, storage capacitor balanced $-40^\circ\text{C} \leq T_J \leq 85^\circ\text{C}$ | | 1.7 | 3 μA | |
| Active cell balancing accuracy | | $(V_{OUT} - V_{BAL})$ vs BAL voltage difference, Storage capacitor balanced HC_SEL = 1, $V_{OUT} = 5.7$ V | -100 | 100 | mV | |
| BAL output drive capability | | $V_{OUT} = 4.95$ V, Sink and source current | ± 10 | ± 15 | mA | |
| Active discharge resistor | | HC_SEL = 0, device in shutdown mode VOUT to BAL and BAL to GND | | 0.85 | 1.5 $\text{k}\Omega$ | |
| LED TEMPERATURE MONITORING | | | | | | |
| $I_{O(TS)}$ | Temperature sense current source | Thermistor bias current | | 23.8 | μA | |
| | TS resistance (warning temperature) | LEDWARN bit = 1, $T_J \geq 25^\circ\text{C}$ | | 39 | 44.5 50 $\text{k}\Omega$ | |
| | TS resistance (hot temperature) | LEDHOT bit = 1, $T_J \geq 25^\circ\text{C}$ | | 12.5 | 14.5 16.5 $\text{k}\Omega$ | |

Electrical Characteristics (continued)

Unless otherwise noted the specification applies for $V_{IN} = 3.6$ V over an operating junction temp. $-40^\circ\text{C} \leq T_J \leq 125^\circ\text{C}$; Circuit in *Parameter Measurement Information* (unless otherwise noted). Typical values are for $T_J = 25^\circ\text{C}$.

| PARAMETER | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|--|---|--|----------------|-----|------------------|
| SDA, SCL, GPIO/PG, Tx-MASK, STRB0, STRB1, HC_SEL | | | | | |
| $V_{(IH)}$ | High-level input voltage | | 1.2 | | V |
| $V_{(IL)}$ | Low-level input voltage | | | 0.4 | V |
| $V_{(OL)}$ | Low-level output voltage (SDA) | $I_{OL} = 8$ mA | | 0.3 | V |
| | Low-level output voltage (GPIO) | $DIR = 1$, $I_{OL} = 5$ mA | | 0.3 | |
| $V_{(OH)}$ | High-level output voltage (GPIO) | $DIR = 1$, $GPIOTYPE = 0$, $I_{OH} = 8$ mA | $V_{IN} - 0.4$ | | V |
| $I_{(LKG)}$ | Logic input leakage current | Input connected to VIN or GND , $-40^\circ\text{C} \leq T_J \leq 85^\circ\text{C}$ | 0.01 | 0.1 | μA |
| R_{PD} | STRB0, STRB1 pull-down resistance | $STRB0, STRB1 \leq 0.4$ V | | 350 | $\text{k}\Omega$ |
| | Tx-MASK pull-down resistance | $Tx\text{-MASK} \leq 0.4$ V | | 350 | |
| | HC_SEL pull-down resistance | $HC\text{_SEL} \leq 0.4$ V | | 350 | |
| $C_{(IN)}$ | SDA input capacitance | $SDA = VIN$ or GND | | 9 | pF |
| | SCL input capacitance | $SCL = VIN$ or GND | | 4 | |
| | GPIO/PG input capacitance | $DIR = 0$, $GPIO/PG = VIN$ or GND | | 9 | |
| | STRB0 input capacitance | $STRB0 = VIN$ or GND | | 3 | |
| | STRB1 input capacitance | $STRB1 = VIN$ or GND | | 3 | |
| | HC_SEL input capacitance | $HC\text{_SEL} = VIN$ or GND | | 3.5 | |
| | Tx-MASK input capacitance | $Tx\text{-MASK} = VIN$ or GND | | 4 | |
| TIMING | | | | | |
| Start-up time | From shutdown into DC-light mode, $HC\text{_SEL} = 0$, $I_{LED} = 111$ mA | | 1.5 | | ms |
| LED current settling time ⁽¹⁾ triggered by a rising edge on STRB0 | $MODE_CTRL = 10$, $HC\text{_SEL} = 0$, $I_{LED2} =$ from 0 mA to 890 mA | | 400 | | μs |
| | $MODE_CTRL = 10$, $HC\text{_SEL} = 1$, $I_{LED2} =$ from 0 mA to 2050 mA | | 16 | | |
| LED current settling time ⁽¹⁾ triggered by Tx-MASK | $MODE_CTRL = 10$, $HC\text{_SEL} = 0$, $I_{LED2} =$ from 890 mA to 390 mA | | 15 | | μs |

(1) Setting time to $\pm 15\%$ of the target value.

7.6 Timing Requirements

| PARAMETER ⁽¹⁾ | TEST CONDITIONS | MIN | MAX | UNIT |
|---------------------------------|---|---------------|-----|---------------|
| $f_{(SCL)}$ SCL clock frequency | Standard mode | | 100 | kHz |
| | Fast mode | | 400 | kHz |
| | High-speed mode (write operation), C_B - 100-pF maximum | | 3.4 | MHz |
| | High-speed mode (read operation), C_B - 100-pF maximum | | 3.4 | MHz |
| | High-speed mode (write operation), C_B - 400-pF maximum | | 1.7 | MHz |
| | High-speed mode (read operation), C_B - 400-pF maximum | | 1.7 | MHz |
| t_{BUF} | Bus free time between a STOP and START condition | Standard mode | 4.7 | μs |
| | Fast mode | | 1.3 | |
| t_{HD}, t_{STA} | Hold time (repeated) START condition | Standard mode | 4 | μs |
| | Fast mode | | 600 | ns |
| | High-speed mode | | 160 | ns |
| t_{LOW} | LOW period of the SCL clock | Standard mode | 4.7 | μs |
| | Fast mode | | 1.3 | μs |
| | High-speed mode, C_B - 100-pF maximum | | 160 | ns |
| | High-speed mode, C_B - 400-pF maximum | | 320 | ns |

(1) Specified by design. Not tested in production.

Timing Requirements (continued)

| PARAMETER ⁽¹⁾ | TEST CONDITIONS | MIN | MAX | UNIT |
|---|---|-------------------------|------|------|
| t_{HIGH} HIGH period of the SCL clock | Standard mode | 4 | | μs |
| | Fast mode | 600 | | ns |
| | High-speed mode, C_B - 100-pF maximum | 60 | | ns |
| | High-speed mode, C_B - 400-pF maximum | 120 | | ns |
| t_{SU}, t_{STA} Setup time for a repeated START condition | Standard mode | 4.7 | | μs |
| | Fast mode | 600 | | ns |
| | High-speed mode | 160 | | ns |
| t_{SU}, t_{DAT} Data setup time | Standard mode | 250 | | ns |
| | Fast mode | 100 | | |
| | High-speed mode | 10 | | |
| t_{HD}, t_{DAT} Data hold time | Standard mode | 0 | 3.45 | μs |
| | Fast mode | 0 | 0.9 | μs |
| | High-speed mode, C_B - 100-pF maximum | 0 | 70 | ns |
| | High-speed mode, C_B - 400-pF maximum | 0 | 150 | ns |
| t_{RCL} Rise time of SCL signal | Standard mode | $20 + (0.1 \times C_B)$ | 1000 | ns |
| | Fast mode | $20 + (0.1 \times C_B)$ | 300 | |
| | High-speed mode, C_B - 100-pF maximum | 10 | 40 | |
| | High-speed mode, C_B - 400-pF maximum | 20 | 80 | |
| t_{RCL1} Rise time of SCL signal after a repeated START condition and after an acknowledge BIT | Standard mode | $20 + (0.1 \times C_B)$ | 1000 | ns |
| | Fast mode | $20 + (0.1 \times C_B)$ | 300 | |
| | High-speed mode, C_B - 100-pF maximum | 10 | 80 | |
| | High-speed mode, C_B - 400-pF maximum | 20 | 160 | |
| t_{FCL} Fall time of SCL signal | Standard mode | $20 + (0.1 \times C_B)$ | 300 | ns |
| | Fast mode | $20 + (0.1 \times C_B)$ | 300 | |
| | High-speed mode, C_B - 100-pF maximum | 10 | 40 | |
| | High-speed mode, C_B - 400-pF maximum | 20 | 80 | |
| t_{RDA} Rise time of SDA signal | Standard mode | $20 + (0.1 \times C_B)$ | 1000 | ns |
| | Fast mode | $20 + (0.1 \times C_B)$ | 300 | |
| | High-speed mode, C_B - 100-pF maximum | 10 | 80 | |
| | High-speed mode, C_B - 400-pF maximum | 20 | 160 | |
| t_{FDA} Fall time of SDA signal | Standard mode | $20 + (0.1 \times C_B)$ | 300 | ns |
| | Fast mode | $20 + (0.1 \times C_B)$ | 300 | |
| | High-speed mode, C_B - 100-pF maximum | 10 | 80 | |
| | High-speed mode, C_B - 400-pF maximum | 20 | 160 | |
| t_{SU}, t_{STO} Setup time for STOP condition | Standard mode | 4 | | μs |
| | Fast mode | 600 | | ns |
| | High-speed mode | 160 | | ns |
| C_B | Capacitive load for SDA and SCL | | 400 | pF |


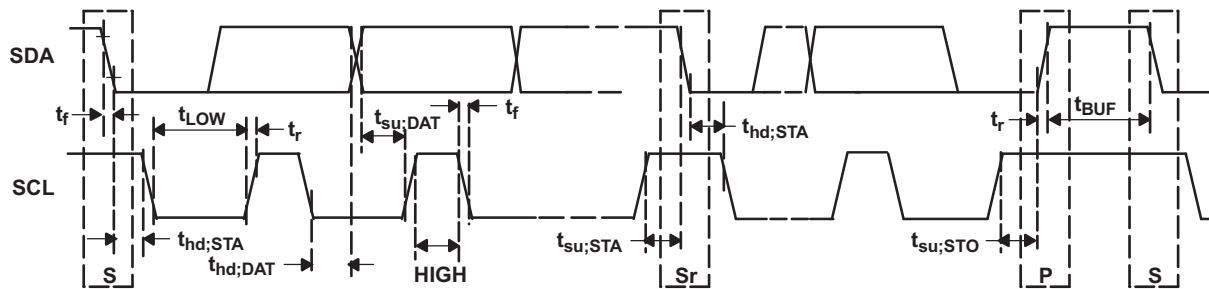


Figure 1. Serial Interface Timing for F/S-Mode

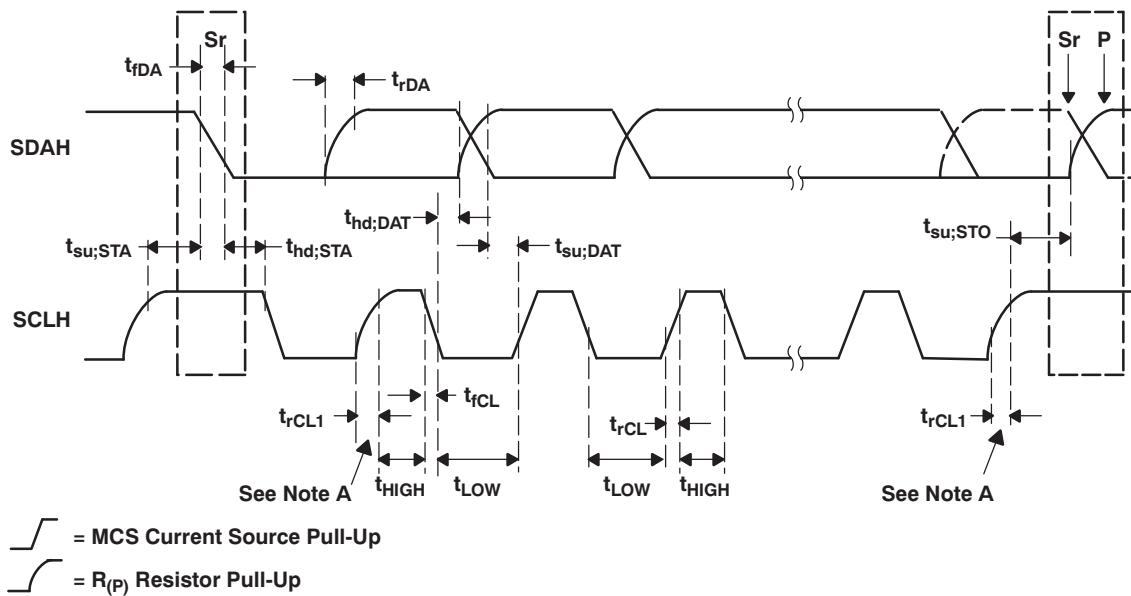

Note A: First rising edge of the SCLH signal after Sr and after each acknowledge bit.

Figure 2. Serial Interface Timing for H/S-Mode

7.7 Typical Characteristics







Table 1. Table of Graphs

| GRAPH NAME | | FIGURE NO. |
|-------------------------|--------------------------------------|---|
| LED Power Efficiency | vs Input Voltage | Figure 3, Figure 4 |
| DC Input Current | vs Input Voltage | Figure 5 |
| LED Current | vs LED Pin Headroom Voltage | Figure 6, Figure 7, Figure 8 |
| LED Current | vs LED Current Digital Code | Figure 9, Figure 10, Figure 11, Figure 12 |
| INDLED Current | vs LED Pin Headroom Voltage | Figure 13 |
| Voltage Mode Efficiency | vs Output Current | Figure 14, Figure 15 |
| DC Output Voltage | vs Output Current | Figure 16 |
| | vs Input Voltage | Figure 17 |
| Maximum Output Current | vs Input Voltage | Figure 18 |
| DC Precharge Current | vs Differential Input-Output Voltage | Figure 19, Figure 20 |
| Valley Current Limit | | Figure 21, Figure 22 |
| Balancing Current | vs Balance Pin Voltage | Figure 23 |
| Supply Current | vs Input Voltage | Figure 24 |

Typical Characteristics (continued)

Table 1. Table of Graphs (continued)

| GRAPH NAME | | FIGURE NO. |
|---------------------------------|------------------------|---|
| Standby Current | vs Ambient Temperature | Figure 25 |
| Temperature Detection Threshold | | Figure 26 , Figure 27 |

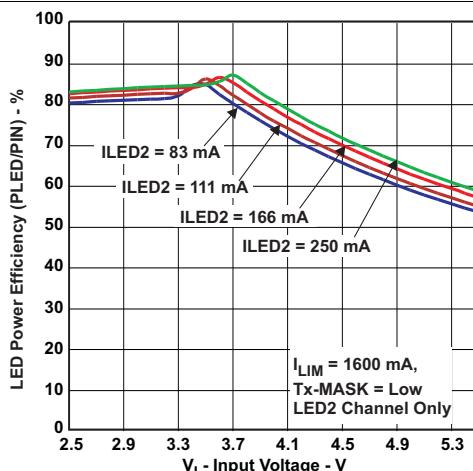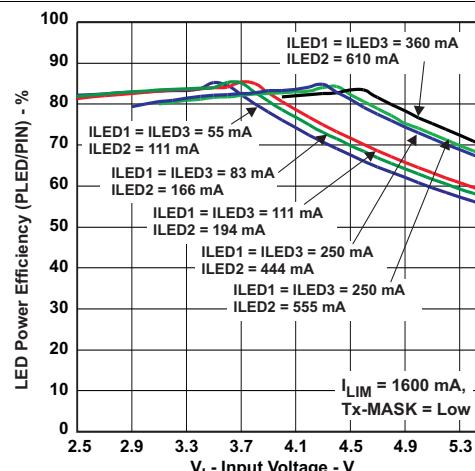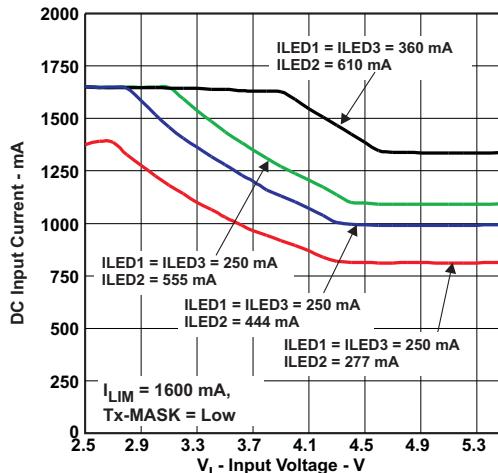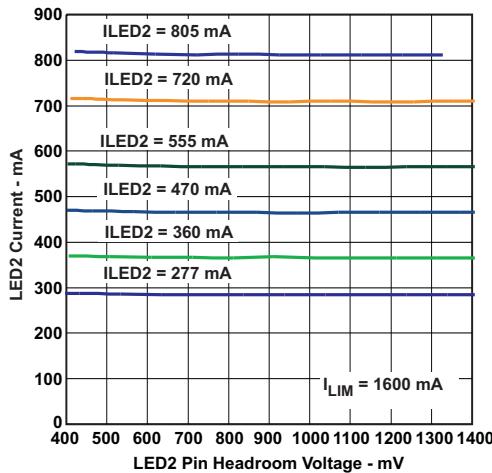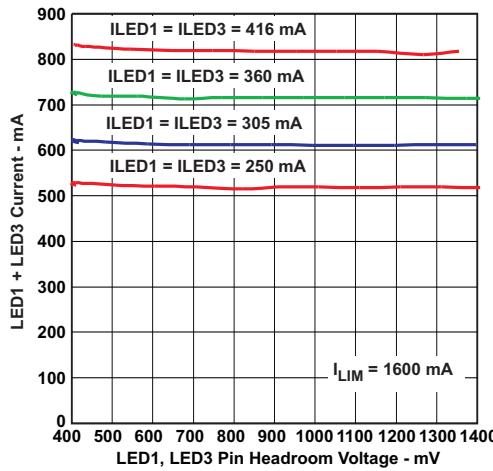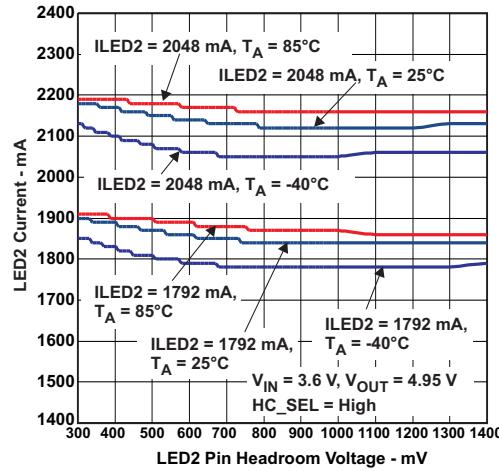
Figure 3. LED Power Efficiency vs Input Voltage

Figure 4. LED Power Efficiency vs Input Voltage

Figure 5. DC Input Current vs Input Voltage

Figure 6. LED2 Current vs LED2 Pin Headroom Voltage (HC_SEL = 0)

Figure 7. LED1 and LED3 Current vs LED1 and LED3 Pin Headroom Voltage (HC_SEL = 0)

Figure 8. LED2 Current vs LED2 Pin Headroom Voltage (HC_SEL = 1)

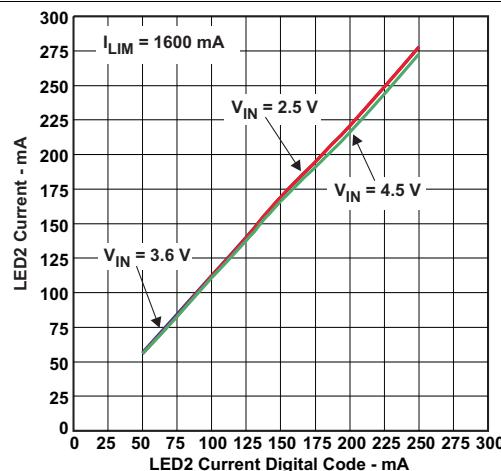


Figure 9. LED2 Current vs
LED2 Current Digital Code (HC_SEL = 0)

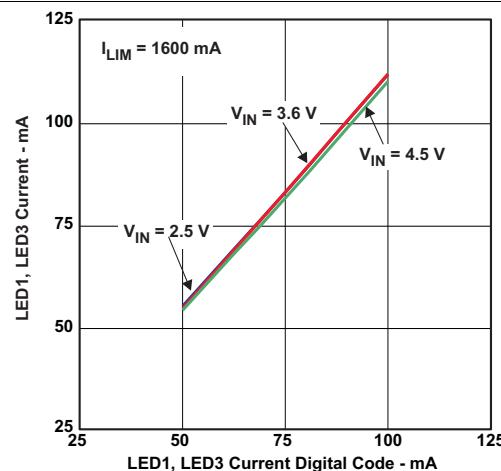


Figure 10. LED1 and LED3 Current vs
LED1 and LED3 Current Digital Code (HC_SEL = 0)

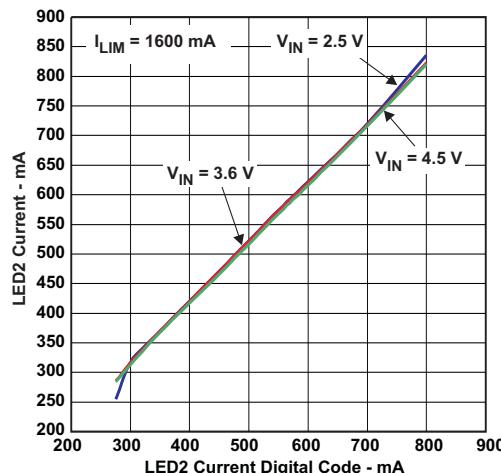


Figure 11. LED2 Current vs
LED2 Current Digital Code (HC_SEL = 0)

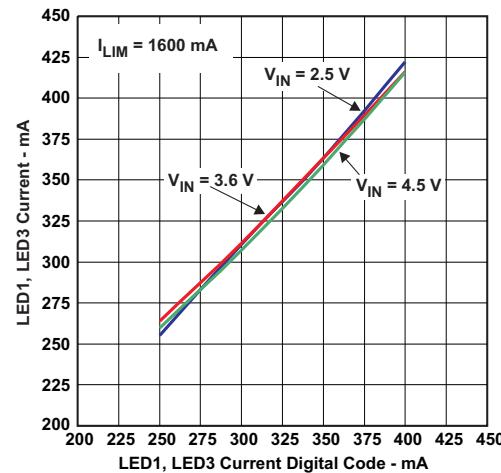


Figure 12. LED1 and LED3 Current vs
LED1 and LED3 Current Digital Code (HC_SEL = 0)

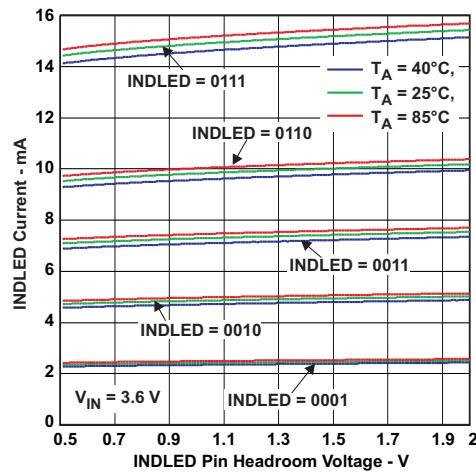


Figure 13. INDLED Current vs
INDLED Pin Headroom Voltage

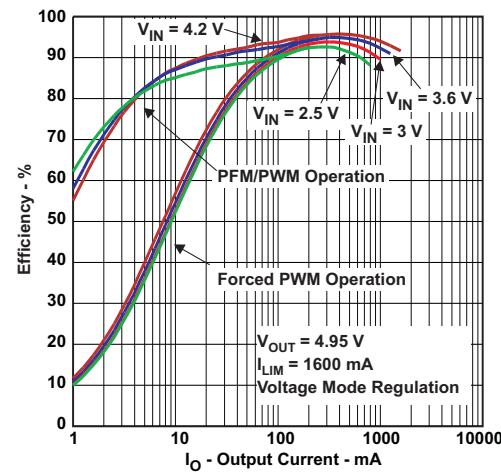
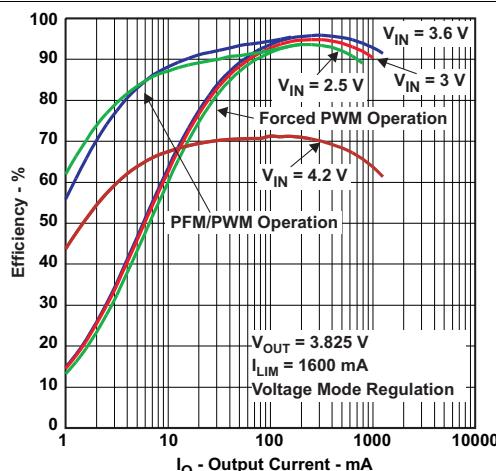
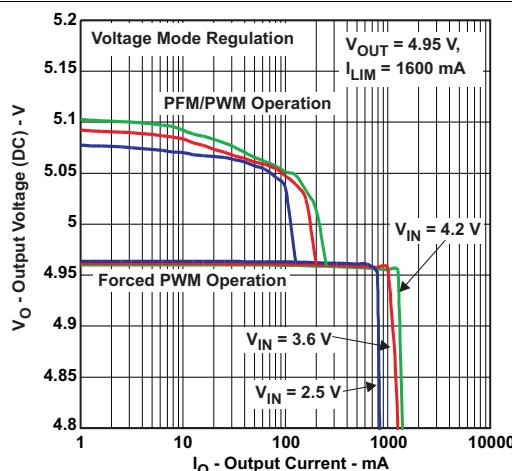
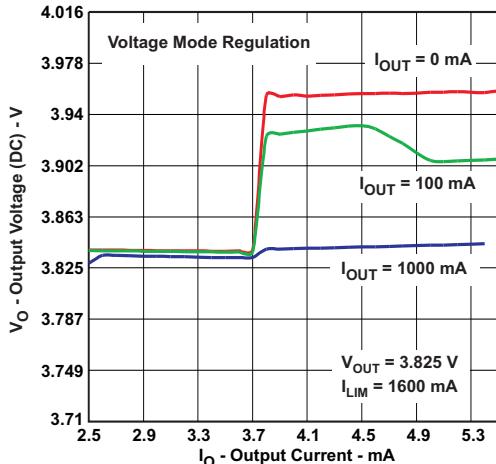
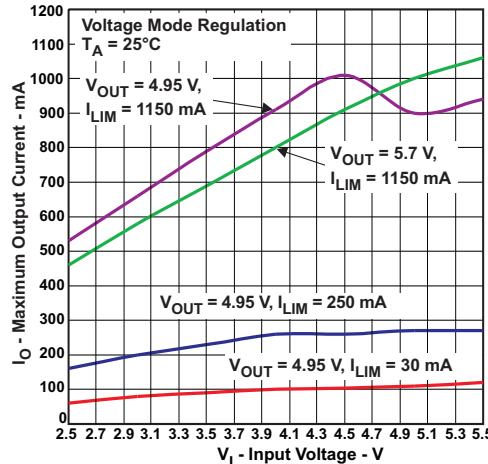
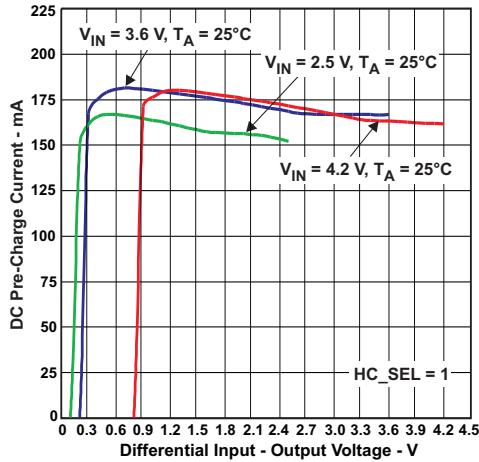
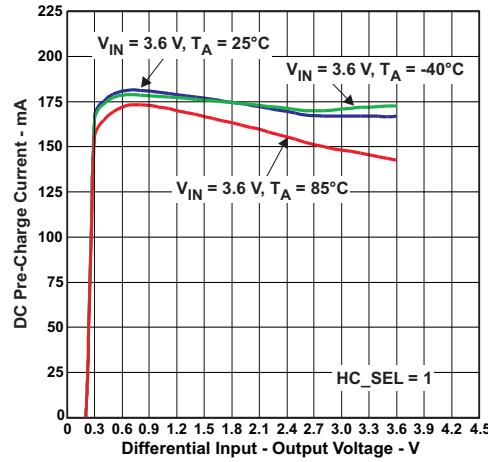
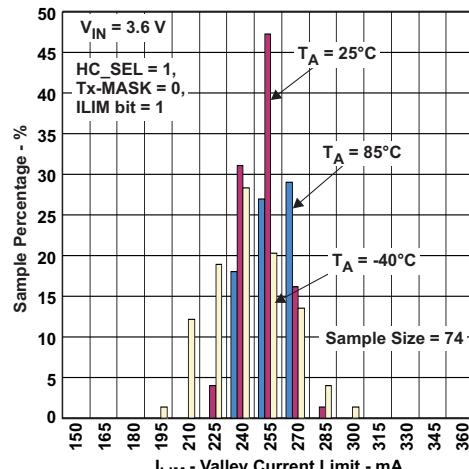
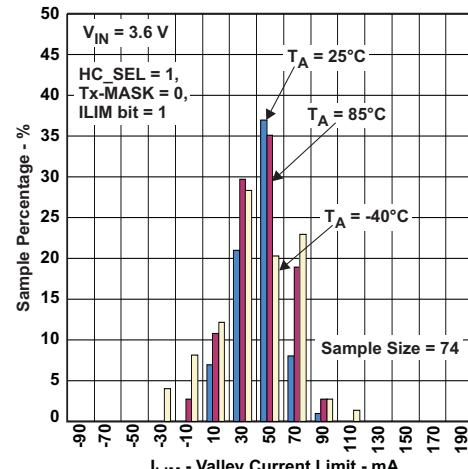
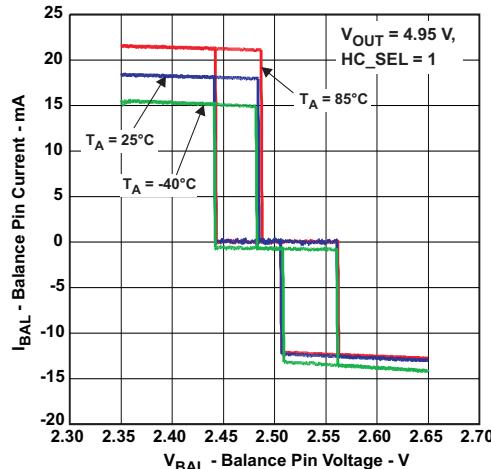
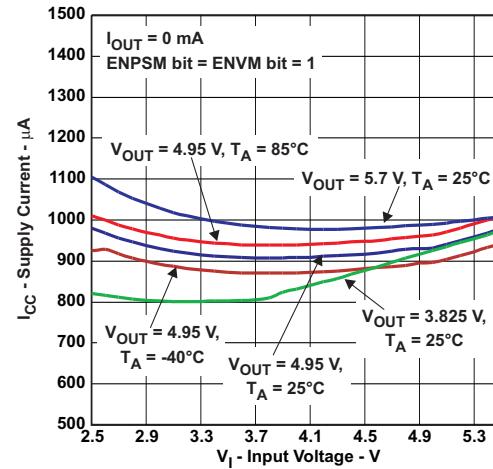
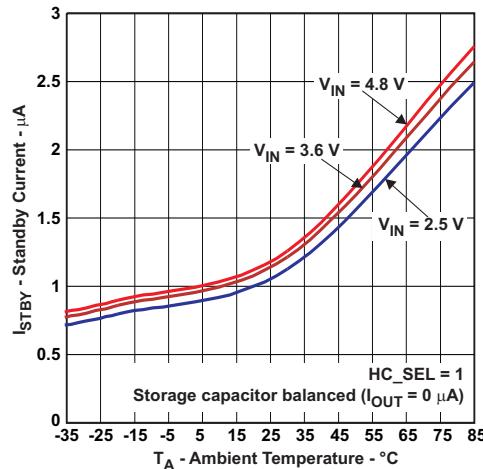
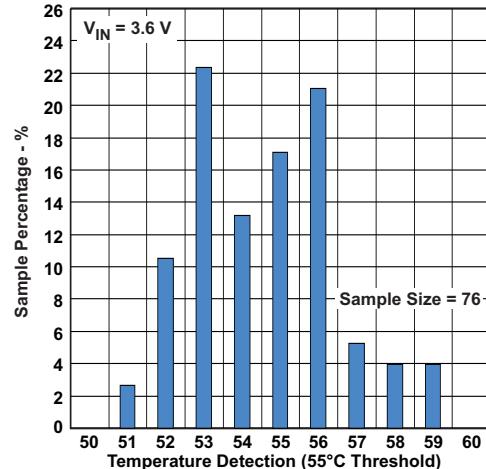


Figure 14. Efficiency vs Output Current


Figure 15. Efficiency vs Output Current

Figure 16. DC Output Voltage vs Load Current

Figure 17. DC Output Voltage vs Input Voltage

Figure 18. Maximum Output Current vs Input Voltage

Figure 19. DC Precharge Current vs Differential Input-Output Voltage (HC_SEL = 1)

Figure 20. DC Precharge Current vs Differential Input-Output Voltage (HC_SEL = 1)


Figure 21. Valley Current Limit (HC_SEL = 1)

Figure 22. Valley Current Limit (HC_SEL = 1)

Figure 23. Balancing Current vs Balance Pin Voltage

Figure 24. Supply Current vs Input Voltage

Figure 25. Standby Current vs Ambient Temperature (HC_SEL = 1)

Figure 26. Temperature Detection Threshold

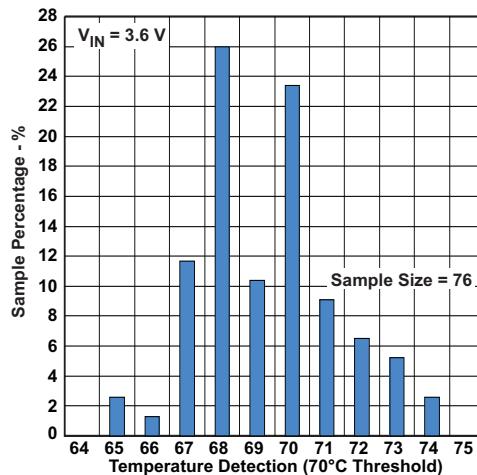


Figure 27. Temperature Detection Threshold

8 Parameter Measurement Information

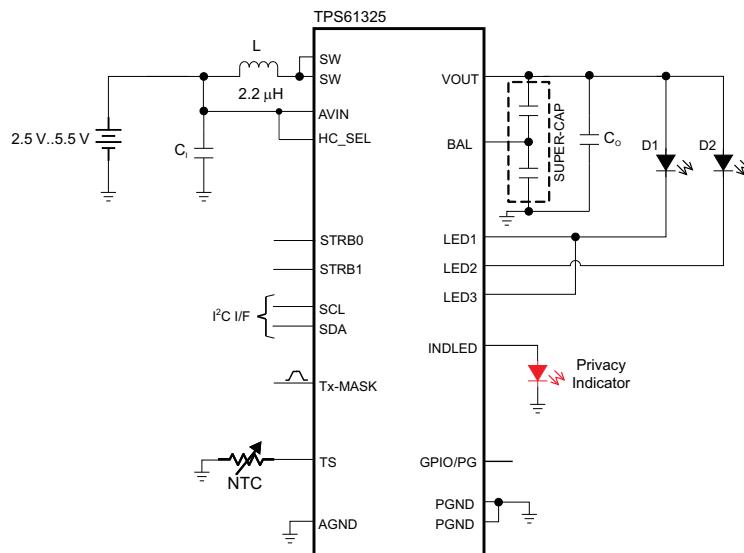


Figure 28. TPS61325 Typical Circuit

List of Components:

L = 2.2 μ H, Wuerth Elektronik WE-TPC Series
 C_I, C_O = 10 μ F, 6.3 V X5R 0603 – TDK C1605X5R0J106MT
 Storage Capacitor = TDK EDLC262020-500 mF
 NTC = 220 k Ω , muRata NCP18WM224J03RB

9 Detailed Description

9.1 Overview

The TPS6132x family employs a 2-MHz fixed ON-time, PWM current-mode converter to generate the output voltage required to drive up to three high power LEDs in parallel. The device integrates a power stage based on an NMOS switch and a synchronous PMOS rectifier. The device also implements a set of linear low-side current regulators to control the LED current when the battery voltage is higher than the diode forward voltage.

A special circuit is applied to disconnect the load from the battery during shutdown of the converter. In conventional synchronous rectifier circuits, the back-gate diode of the high-side PMOS is forward biased in shutdown and allows current flowing from the battery to the output. This device however uses a special circuit which takes the cathode of the back-gate diode of the high-side PMOS and disconnects it from the source when the regulator is in shutdown (HC_SEL = L).

The TPS6132x device cannot only operate as a regulated current source but also as a standard voltage boost regulator featuring power-save mode for improved efficiency at light load. Voltage mode operation can be enabled and disabled by software control.

The TPS6132x device also supports storage capacitor on its output (energy storage mode). In this operating mode (HC_SEL = H), the inductive power stage is used to charge-up the super-capacitor to a user selectable value. Once the charge-up is complete, the LEDs can be fired up to 1025 mA (LED1 and LED3) and 2050 mA (LED2) without causing a battery overload.

In general, a boost converter only regulates output voltages which are higher than the input voltage. This device operates differently. For example, in the voltage mode operation the device is capable to regulate 4.2 V at the output from a battery voltage pulsing as high 5.5 V. To control these applications properly, a down conversion mode is implemented.

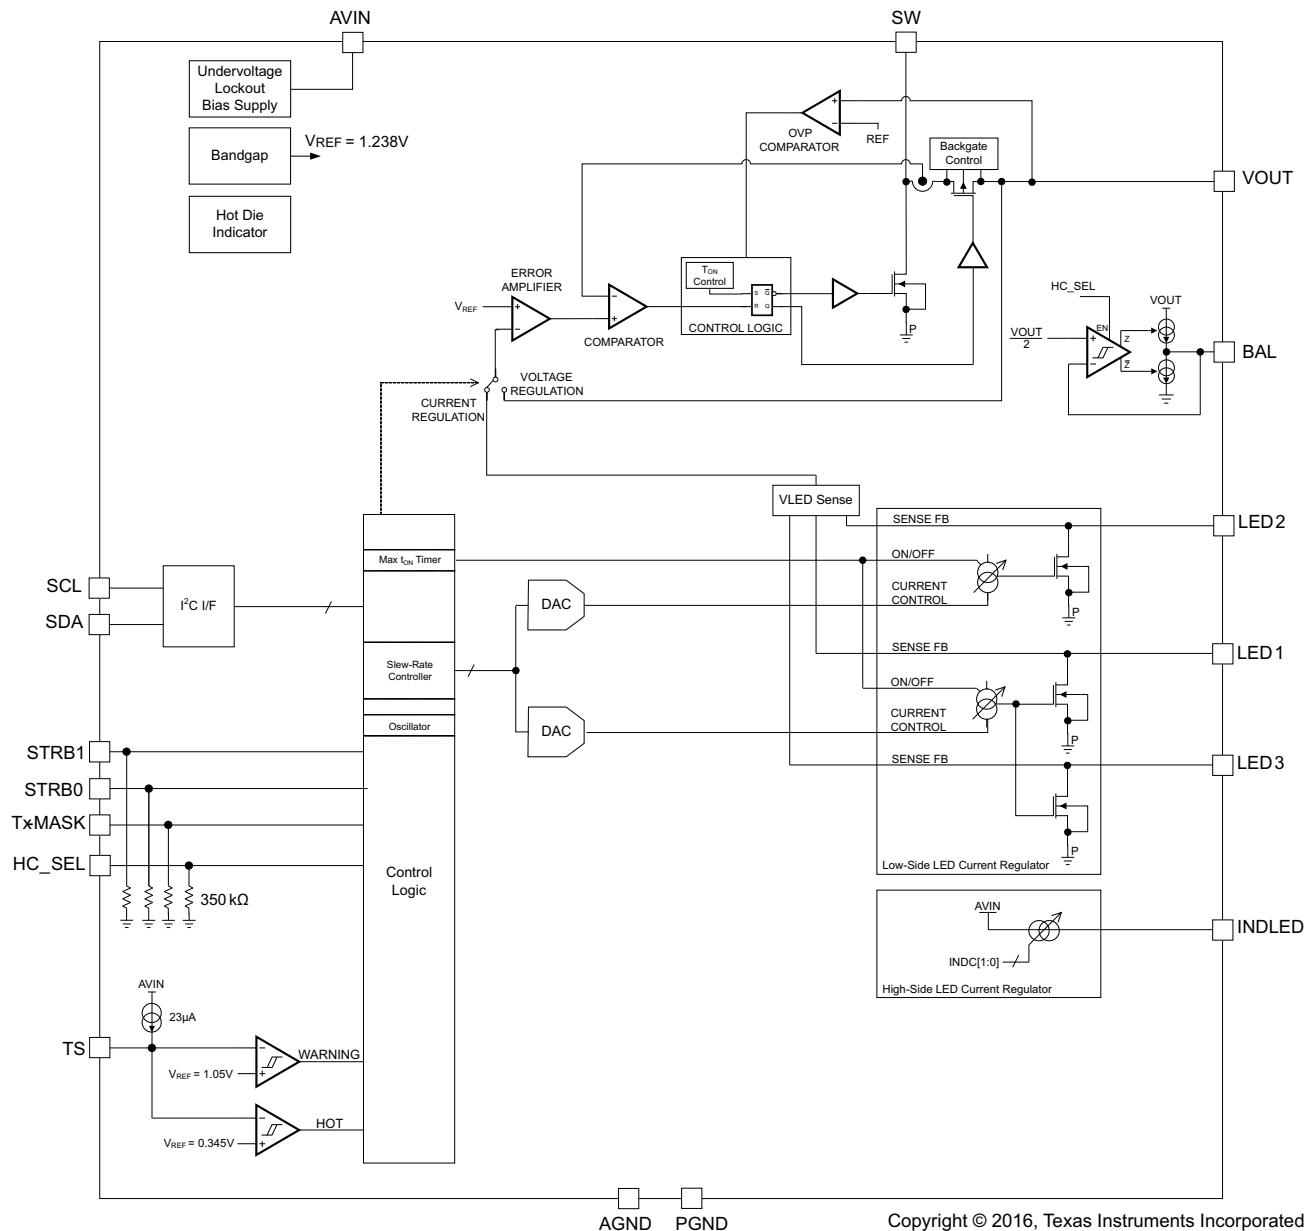
If the input voltage reaches or exceeds the output voltage, the converter changes to a down conversion mode. In this mode, the control circuit changes the behavior of the rectifying PMOS. It sets the voltage drop across the PMOS as high as required to regulate the output voltage. This means the power losses in the converter increase. This must be taken into account for thermal consideration.

In direct drive mode (HC_SEL = L), the power stage is capable of supplying a maximum total current of roughly 1300 mA to 1500 mA. The TPS6132x provides three constant current inputs capable of sinking up to 445 mA (LED1 and LED3) and 890 mA (LED2) in flashlight mode.

The TPS6132x integrates an I²C compatible interface allowing transfers up to 3.4 Mbps. This communication interface can be used to set the operating mode (shutdown, constant output current mode vs constant output voltage mode), to control the brightness of the external LED (DC-light and flashlight modes), to adjust the output voltage (from 3.825 V to 5.7 V in 125-mV steps) or to program the safety timer for instance. See [Register Maps](#) for more details.

In the TPS6132x device, the DC-light and flash can be controlled either by the I²C interface or by the means of hardware control signals (STRB0 and STRB1). The maximum duration of the flashlight pulse can be limited by means of an internal user programmable safety timer (STIM). To avoid the LEDs to be kept accidentally on in DC-light mode by software control, the device implements a 13-s watchdog timer. The DC-light watchdog timer can be disabled by pulling the STRB1 signal high.


9.2 Functional Block Diagram



Copyright © 2016, Texas Instruments Incorporated

Figure 29. TPS6132x Block Diagram

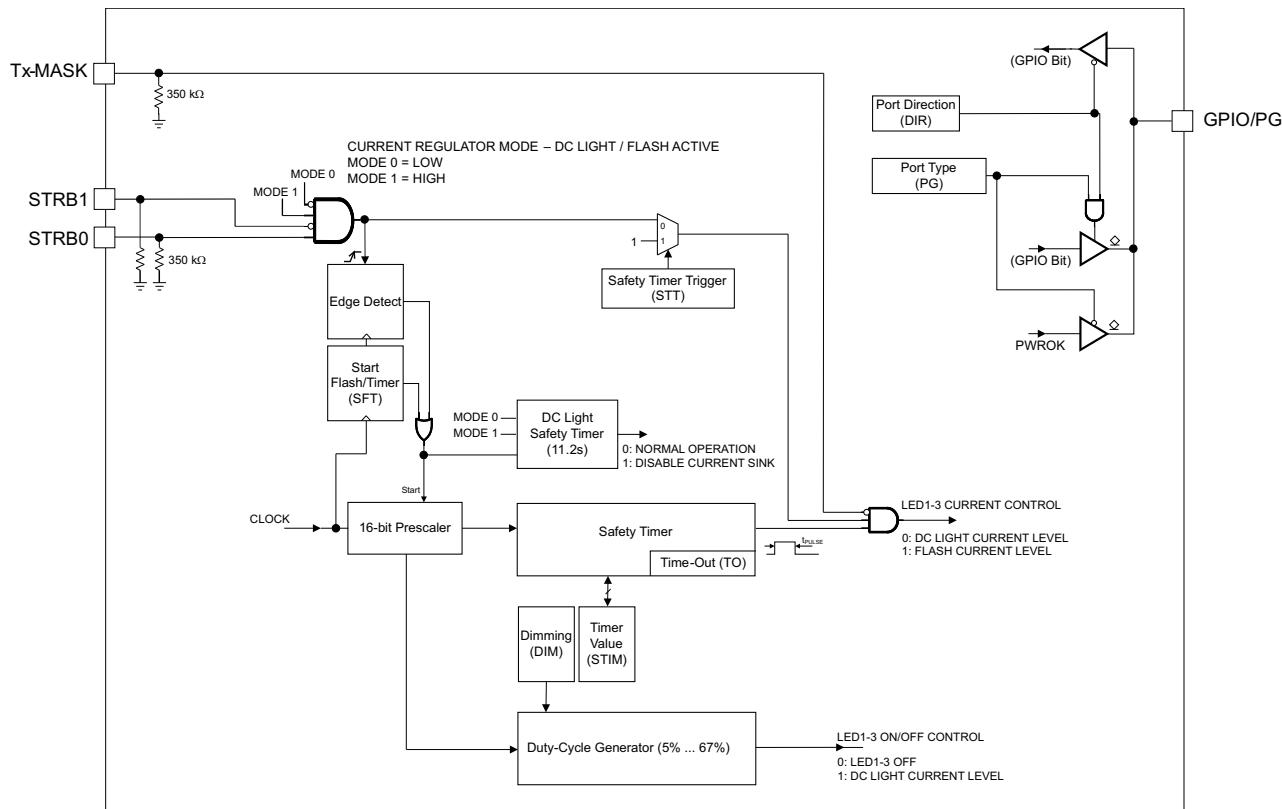Functional Block Diagram (continued)



Copyright © 2016, Texas Instruments Incorporated

Figure 30. Timer Block Diagram

9.3 Feature Description

9.3.1 LED High-current Regulators, Unused Inputs

The TPS6132x device uses LED forward voltage sensing circuitry on LEDx pins to optimize the power stage boost ratio for maximum efficiency. TI recommends against leaving any of the LEDx pins unused if the operation is selected through ENDLED[3:1] bits due to the nature of the sensing circuitry. Leaving these pins unconnected, whilst the respective ENLEDx bits have been set, forces the control loop into high gain and eventually trip the output over-voltage protection.

The LEDx inputs may be connected together to drive one or two LEDs at higher currents. Connecting the current sink inputs in parallel does not affect the internal operation of the TPS6132x. TI recommends disabling the LED inputs that are not used for best operation (see [REGISTER5 \(address = 0x05\)](#)).

To achieve smooth LED current waveforms, the TPS6132x device actively controls the LED current ramp-up and ramp-down sequences.

Table 2. LED Current Ramp-Up and Ramp-Down Control vs Operating Mode

| | DIRECT DRIVE MODE (HC_SEL = 0) | HIGH-CURRENT MODE (HC_SEL = 1) |
|---------------------|--|--|
| LED CURRENT RAMP-UP | $I_{STEP} = 27.5 \text{ mA}$ | $I_{STEP} = 62 \text{ mA}$ |
| | $t_{RISE} = 12 \mu\text{s}$ | $t_{RISE} = 0.5 \mu\text{s}$ |
| | Slew-rate $\approx 2.3 \text{ mA}/\mu\text{s}$ | Slew-rate $\approx 124 \text{ mA}/\mu\text{s}$ |

Feature Description (continued)

Table 2. LED Current Ramp-Up and Ramp-Down Control vs Operating Mode (continued)

| | DIRECT DRIVE MODE (HC_SEL = 0) | HIGH-CURRENT MODE (HC_SEL = 1) |
|-----------------------|---|--|
| LED CURRENT RAMP-DOWN | $I_{STEP} = 27.5 \text{ mA}$ | $I_{STEP} = 62 \text{ mA}$ |
| | $t_{FALL} = 0.5 \mu\text{s}$ | $t_{FALL} = 0.5 \mu\text{s}$ |
| | Slew-rate $\approx 55 \text{ mA}/\mu\text{s}$ | Slew-rate $\approx 124 \text{ mA}/\mu\text{s}$ |

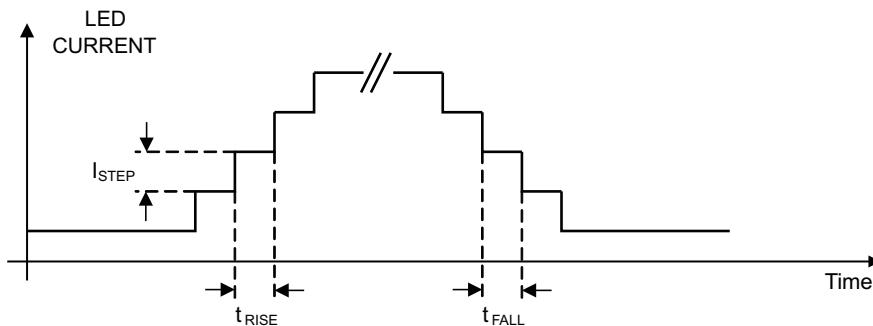


Figure 31. LED Current Slew-Rate Control

In high-current mode (HC_SEL = 1), the LED current settings are defined as a fixed ratio (×2.25) versus the direct drive mode values (HC_SEL = L).

9.3.2 Safety Timer Accuracy

The LED strobe timer uses the internal oscillator as a reference clock. The timer execution speed (see [REGISTER3 \(address = 0x03\)](#)) scales according to the reference clock accuracy.

Table 3. Safety Timer Accuracy

| OSCILLATOR FREQUENCY | SAFETY TIMER DURATION |
|----------------------|--|
| Minimum | Maximum = Typical $\times (1 + f_{ACC})^{(1)}$ |
| Typical | Typical ⁽²⁾ |
| Maximum | Minimum = Typical $\times (1 - f_{ACC})^{(1)}$ |

(1) See [REGISTER3 \(address = 0x03\)](#)

(2) See [Electrical Characteristics](#)

9.3.3 Current Limit Operation

The current limit circuit employs a valley current sensing scheme. Current limit detection occurs during the off-time through sensing of the voltage drop across the synchronous rectifier. The detection threshold is user selectable through the ILIM bit. The ILIM bit can only be set while still in shutdown before the device begins operation..

[Figure 32](#) illustrates the inductor and rectifier current waveforms during current limit operation. The output current (I_{OUT}) is the average of the rectifier ripple current waveform. When the load current is increased such that the lower peak is above the current limit threshold, the off-time is lengthened to allow the current to decrease to this threshold before the next on-time begins, so called frequency fold-back mechanism.

Both the output voltage and the switching frequency are reduced as the power stage of the device operates in a constant current mode. [Equation 1](#) shows the maximum continuous output current ($I_{OUT(CL)}$) before entering current limit operation.

$$I_{OUT(CL)} = (1 - D) \times (I_{VALLEY} + \frac{1}{2} \Delta I_L) \text{ with } \Delta I_L = \frac{V_{IN}}{L} \times \frac{D}{f} \text{ and } D \approx \frac{V_{OUT} - V_{IN}}{V_{OUT}} \quad (1)$$

The TPS6132x device also provides a negative current limit (approximately 300 mA) to prevent an excessive reverse inductor current when the power stage sinks current from the output (storage capacitor) in the forced continuous conduction mode.

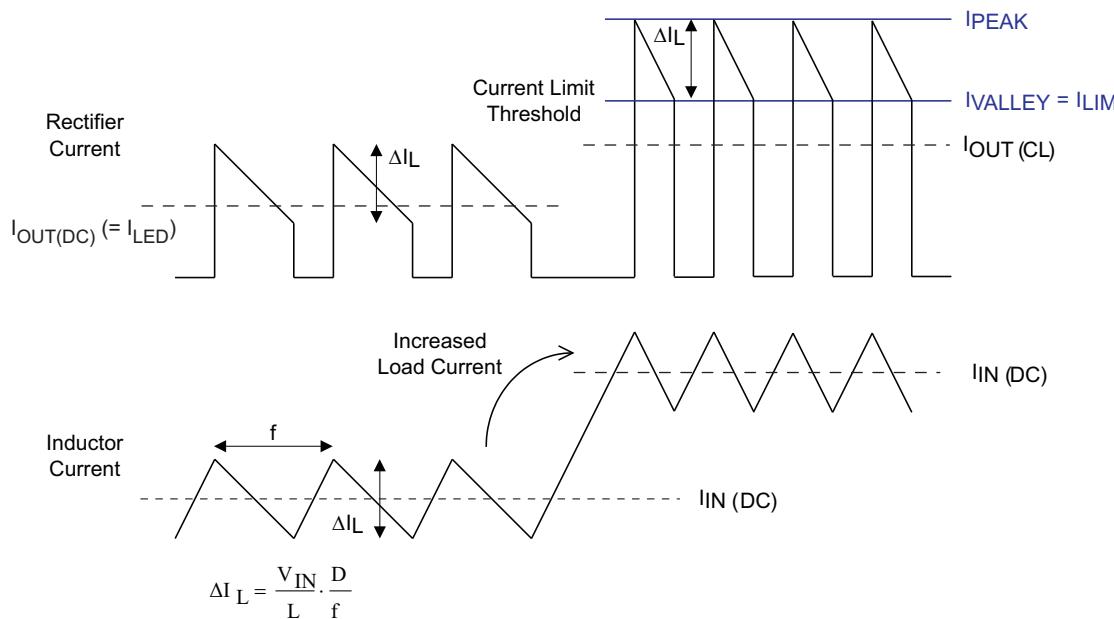


Figure 32. Inductor and Rectifier Currents in Current Limit Operation

NOTE

To minimize the requirements on the energy storage capacitor present at the output of the driver (HC_SEL = 1), the TPS6132x device can contribute to a larger extent in supporting directly the high-current LED flash strobe. In fact, the device can dynamically adjust its current limit setting according to the Tx-MASK input.

Table 4. Inductor Current Limit Operation vs HC_SEL and Tx-MASK Inputs

| VALLEY CURRENT LIMIT SETTING | ILIM BIT | HC_SEL INPUT | Tx-MASK INPUT |
|------------------------------|----------|--------------|---------------|
| 1150 mA | Low | Low | Low |
| 1600 mA | High | Low | Low |
| 30 mA | Low | High | Low |
| 250 mA | High | High | Low |
| 1150 mA | Low | Low | High |
| 1600 mA | High | Low | High |
| — ⁽¹⁾ | Low | High | High |
| — ⁽¹⁾ | High | High | High |

(1) The DC-DC power stage is disabled, zero current is being drained from the input source.

9.3.4 Start-Up Sequence

To avoid high inrush current during start-up, the internal start-up cycle begins with a precharge phase. During precharge, the rectifying switch is turned on until the output capacitor is either charged to a value close to the input voltage or approximately 3.3 V, whichever occurs first. The rectifying switch is current limited during this phase. The current limit increases with decreasing input to output voltage difference. This circuit also limits the output current under short-circuit conditions at the output. [Figure 33](#) shows the typical precharge current vs input minus the output voltage for a specific input voltage.

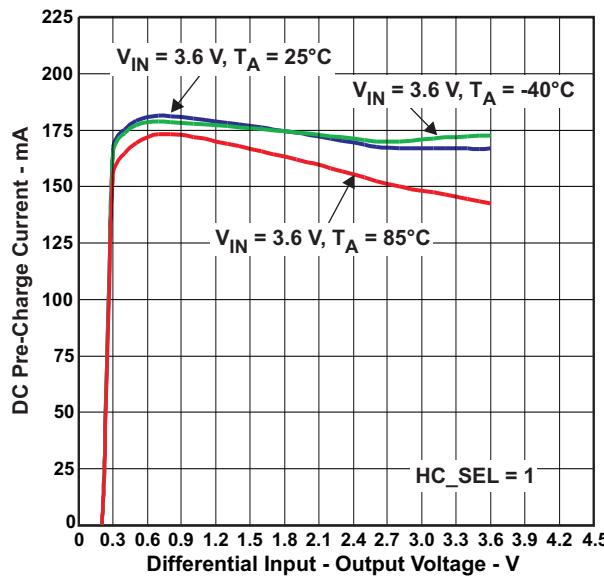


Figure 33. Typical DC Precharge and Short-Circuit Current

In direct drive mode (HC_SEL = L, TPS6132x), after having precharged the output capacitor, the device begins switching and increases its current limit in three steps to the target determined by the ILIM setting, typically to 30 mA, 250 mA, or full current limit. The current limit transition from the first to the second step occurs after a millisecond of operation. Full current limit operation is set once the output voltage reaches its regulation limits. In this mode, the active balancing circuit is disabled.

In high-current mode (HC_SEL = H), the precharge voltage of the storage capacitor is dependent on the input voltage and operating mode (voltage regulation versus current regulation mode). In case the device is set for exclusive current regulation operation (MODE_CTRL = 01 or 10 and ENV_M = 0), the output capacitor precharge voltage is close to the input voltage. Under all other operating conditions, the precharge voltage is either close to the input voltage or approximately 3.3 V, whichever is lower. Furthermore, precharge operation can be suspended and resumed through the Tx-MASK input (see [REGISTER4 \(address = 0x04\)](#) and [REGISTER3 \(address = 0x03\)](#)).

The device begins switching after the storage capacitor pre-charging is complete. During down-mode operation, the inductor valley current is actively limited either to 30 mA or 250 mA (see [REGISTER4 \(address = 0x04\)](#)). As the device enters boost mode operation, the current limit transitions to full capacity (see [REGISTER4 \(address = 0x04\)](#) and [REGISTER3 \(address = 0x03\)](#)). As a consequence, the output voltage ramps-up linearly and the start-up time required to reach the programmed output voltage (see [REGISTER6 \(address = 0x06\)](#)) depends primarily on the super-capacitor value and load current. In this mode, the active balancing circuit is enabled.

9.3.5 Power Good (Flash Ready)

The TPS6132x integrates a power-good circuitry that is activated when the device is operating in voltage regulation mode (MODE_CTRL = 11 or ENV_M = 1). In shutdown mode (MODE_CTRL = 00) the GPIO/PG pin state is defined in [Table 5](#).

Table 5. GGPIO/PG Pin State


| GPIO TYPE | GPIO/PG SHUTDOWN STATE |
|-----------|---------------------------|
| 0 | Reset or pulled to ground |
| 1 | Open-drain |

Depending on the GPIO/PG output stage type selection, push-pull or open-drain, the polarity of the power-good output signal (PG) can be inverted or noninverted. The power-good software bit and hardware signal polarity is defined in [Table 6](#).

Table 6. PG Bit and Polarity

| GPIO TYPE | PG BIT | GPIO/PG OUTPUT PORT | COMMENTS |
|----------------------|--------|---------------------|---------------------------------------|
| 0: push-pull output | 0 | 0 | Output is active high signal polarity |
| | 1 | 1 | |
| 1: open-drain output | 0 | Open-drain | Output is active low signal polarity |
| | 1 | Low | |

The power good signal is valid when the output voltage is within -1.5% and 2.5% of its nominal value. Conversely, it is asserted low when the voltage mode operation gets suspended (MODE_CTRL \neq 11 and ENVM = 0).

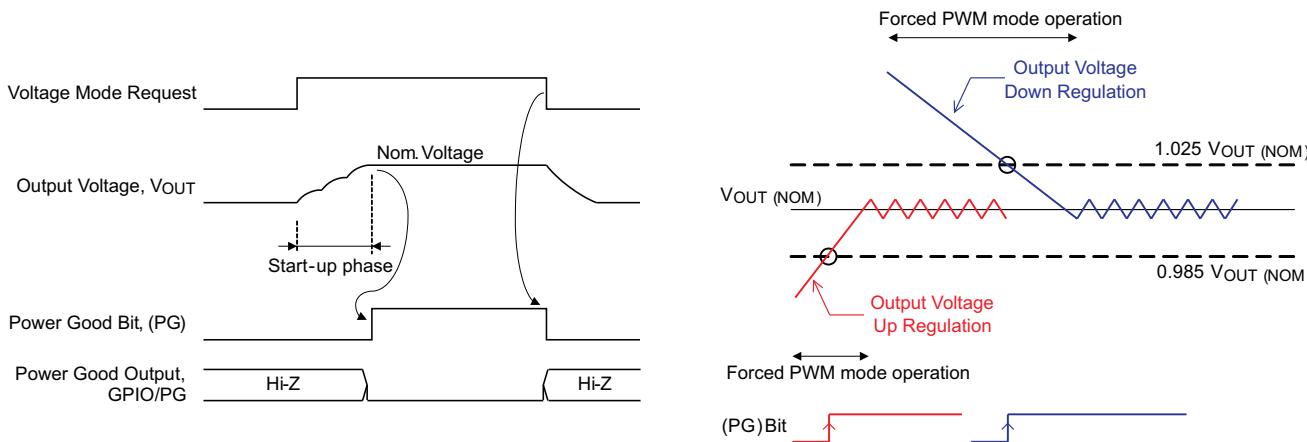
Figure 34. Power Good Operation (DIR = 1, GPIO TYPE = 1)

The TPS6132x device uses a control architecture that allows *recycling* excessive energy that might be stored in the output capacitor. By reversing the operation of the boost power stage, the converter is able to transfer energy from its output back into the input source. In this case, the power-good signal is deasserted while the output voltage is decreasing towards its target value: the closest fit voltage the converter can support. See [Down Mode In Voltage Regulation Mode](#) for additional information.

9.3.6 LED Temperature Monitoring

The TPS6132x devices monitor the LED temperature by measuring the voltage between the TS and AGND pins. An internal current source provides the bias (approximately $24\ \mu\text{A}$) for a negative-temperature coefficient resistor (NTC), and the TS pin voltage is compared to internal thresholds ($1.05\ \text{V}$ and $0.345\ \text{V}$) to protect the LEDs against overheating.

The temperature monitoring related blocks are always active in DC-light or flashlight modes. In voltage mode operation (MODE_CTRL = 11), the device only activates the TS input when the ENTS bit is set to high. In shutdown mode, the LED temperature supervision is disabled and the quiescent current of the device is dramatically reduced.

The LEDWARN and LEDHOT bits reflect the LED temperature. The LEDWARN bit is set when the voltage seen at the TS pin is lower than $1.05\ \text{V}$. This threshold corresponds to an LED warning temperature value, the device operation is still permitted.

While regulating LED current (DC-light or flashlight modes), the LEDHOT bit is latched when the voltage seen at the TS pin is lower than $0.345\ \text{V}$. This threshold corresponds to an excessive LED temperature value, the device operation is immediately suspended (MODE_CTRL bits are reset and HOTDIE bits are set).

9.3.7 Hot Die Detector

The hot die detector monitors the junction temperature but does not shutdown the device. It provides an early warning to the camera engine to avoid excessive power dissipation thus preventing thermal shutdown during the next high-power flash strobe.

The hot die detector (HOTDIE bits) reflects the instantaneous junction temperature and is always enabled, except when the device is in shutdown mode (MODE_CTRL = 00).

9.3.8 Undervoltage Lockout

The undervoltage lockout circuit (UVLO) protects the device from mis-operation at low input voltages by preventing the converter from turning on the switch-MOSFET or rectifier-MOSFET for battery voltages below 2.3 V. The I²C compatible interface is fully functional down to 2.1-V input voltage.

9.3.9 Storage Capacitor Active Cell Balancing

A fully charged super-capacitor typically has a leakage current under 1 μ A. The TPS6132x device integrates an active balancing feature to cut the total leakage current from the super-capacitor and balance circuit to less than 1.7 μ A (typical).

The device integrates a window comparator to monitor the tap point of the multi-cell super-capacitor. The balancing output (BAL) is substantially half the actual output voltage (V_{OUT}). If the internal leakage current in one capacitor is larger than in the other, the voltage at their junction tends to change in such a way that the voltage on the capacitor with the larger (or largest) leakage current is reduced.

When this happens, current flows from BAL in an appropriate direction to reduce the magnitude of voltage changes. After a long period of steady-state conditions the current from BAL is approximately equal to the difference between the leakage currents of the capacitor pair being balanced by the circuit. The output resistance of the balancing circuit, approximately 250 Ω , determines how quickly an imbalance is corrected.

9.3.10 RED Light Privacy Indicator

The TPS6132x device provides a high-side linear constant current source to drive low VF LEDs. The LED current is directly regulated off the battery and can be controlled through the INDC bits. Operation is understood best by referring to the Figure 35 and Figure 36.

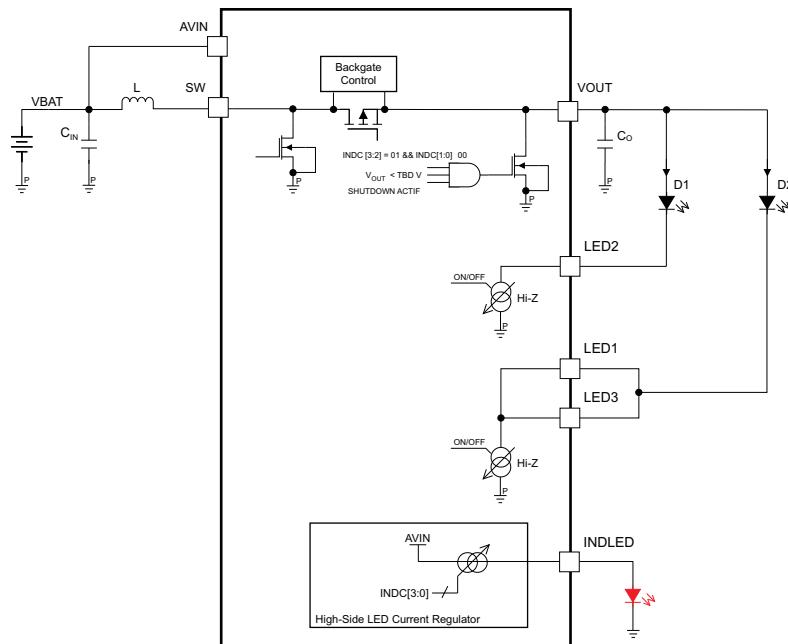


Figure 35. RED Light Indicator, Configuration 1

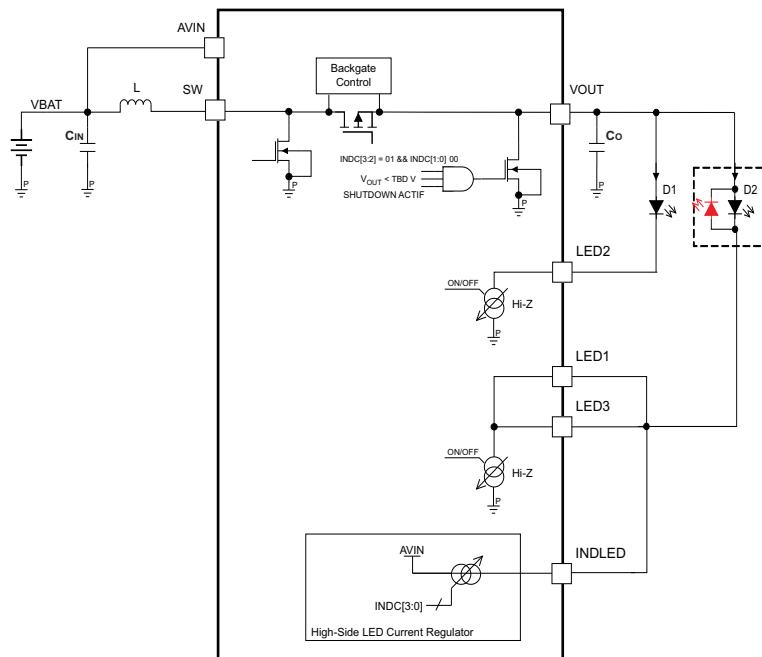


Figure 36. RED Light Indicator, Configuration 2

The device can provide a path to allow for reverse biasing of white LEDs (see [Figure 36](#)). To do so, the output of the converter (VOUT) is pulled to ground thus allowing a reverse current to flow. This mode of operation is only possible when the converter's power stage is in shutdown (MODE_CTRL = 00, ENVM = 0 and HC_SEL = 0).

9.3.11 White LED Privacy Indicator

The TPS6132x device features white LED drive capability at low light intensity. To generate a reduced LED average current, the device employs a 30-kHz fixed frequency PWM modulation scheme. The PWM timer uses the internal oscillator as reference clock, therefore the PWM modulating frequency shows the same accuracy as the internal reference clock. See [Figure 30](#) for more information on device operation.

The DC-light current is modulated with a duty cycle defined by the INDC bits. The low light dimming mode can only be activated in the software controlled DC-light only mode (MODE_CTRL = 01, ENVM = 1) and applies to the LEDs selected through ENLED bits. In this mode, the DC-light safety timeout feature is disabled.

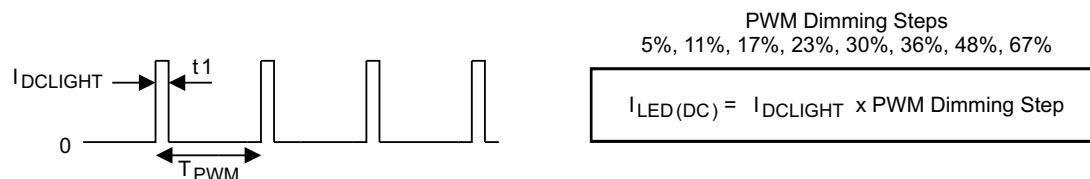


Figure 37. PWM Dimming Principle

9.3.12 Storage Capacitor, Precharge Voltage Calibration

High-power LEDs tend to exhibit a wide forward voltage distribution. The TPS6132x device integrates a self-calibration procedure that can be used to determine the optimum super-capacitor precharge voltage based on the actual worst case LED forward voltage and ESR of the storage capacitor. This calibration procedure is meant to start at a minimum output voltage and can be initiated by setting the SELFCAL bit, preferably with MODE_CTRL = 00, ENVM = 0.

The calibration procedure monitors the sense voltage across the low-side current regulators, according to ENLED bits setting, and registers the LED featuring the largest forward voltage. The TPS6132x device automatically sweeps through its output voltage range and performs a short duration flash strobe for each step (see [REGISTER2 \(address = 0x02\)](#) and [REGISTER1 \(address = 0x01\)](#)).

In direct drive mode (HC_SEL = L), the energy is being directly transferred from the battery to the LEDs. In high-current mode (HC_SEL = H), the energy is supplied exclusively by the output reservoir capacitor and the inductive power stage is turned off for the flash strobe period of time.

The sequence is stopped once each of the the low-side current regulators has enough headroom voltage, typically 400 mV. The resulting output voltage is written to register OV and the SELFCAL bit is set. The SELFCAL bit is only reset at the start of a calibration cycle. When SELFCAL is asserted, the output voltage register (OV) returns the result of the last calibration sequence.

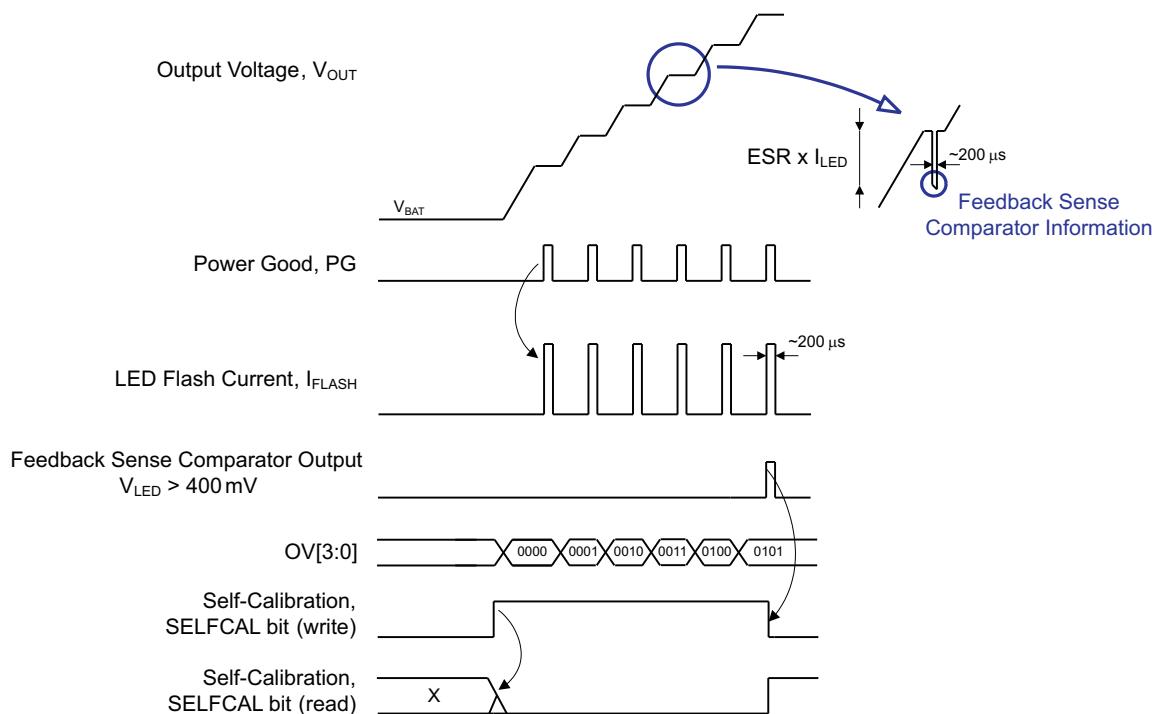


Figure 38. LED Forward Voltage Self-Calibration Principle

9.3.13 Storage Capacitor, Adaptive Precharge Voltage

In high-power LED camera flash applications, the storage capacitor is supposed to be charged to an optimum voltage level to:

- Maintain sufficient headroom voltage across the LED current regulators for the entire strobe time.
- Minimize the power dissipation in the device.

High-power LEDs tend to exhibit large dynamic forward voltage variation relating to own self-heating effects. In addition, the energy storage capacitor, an electrochemical double-layer capacitor or super-capacitor, also shows a relatively large effective capacitance and ESR spread. The main factors contributing to these variations are: flash strobe duration, temperature, and ageing effects.

In practice, it normally becomes very challenging to compensate for all these variations and a worst-case design would presumably be too pessimistic. As a consequence, designers would have to give-up on the benefits coming along with the *Storage Capacitor, Precharge Voltage Calibration* approach.

The TPS6132x device offers the possibility of controlling the storage capacitor precharge voltage in a closed-loop manner. The principle is to dynamically adjust the initial pre-voltage to the minimum value, as required for the particular components characteristic and operating conditions.

The reference criteria used to evaluate proper operation is the headroom voltage across the LED current regulators. In case of a critical headroom voltage (V_{LEDx}) at the end of a flash strobe, cycle n , the precharge voltage must be increased before to the next capture sequence, cycle $n + 1$.

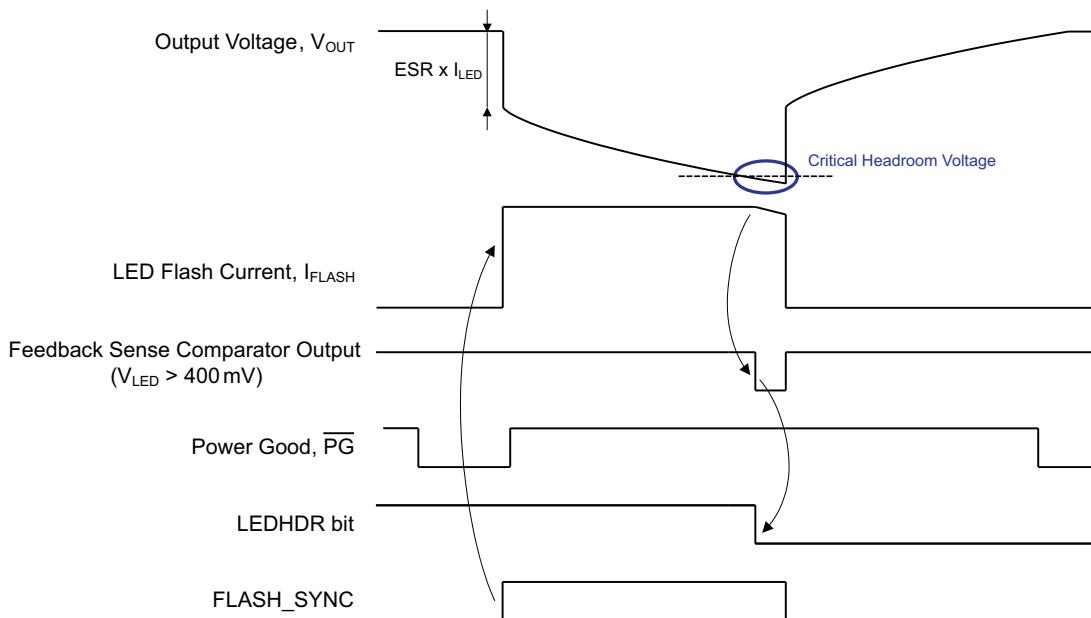


Figure 39. Storage Capacitor, Simple Adaptive Precharge Voltage

9.3.14 Serial Interface Description

I²C is a 2-wire serial interface developed by Philips Semiconductor, now NXP Semiconductors [1]. The bus consists of a data line (SDA) and a clock line (SCL) with pullup structures. When the bus is *idle*, both SDA and SCL lines are pulled high. All the I²C compatible devices connect to the I²C bus through open drain I/O pins, SDA and SCL. A *master* device, usually a microcontroller or a digital signal processor, controls the bus. The master is responsible for generating the SCL signal and device addresses. The master also generates specific conditions that indicate the START and STOP of data transfer. A *slave* device receives and transmits data on the bus under control of the master device.

The TPS6132x device works as a *slave* and supports the following data transfer *modes*, as defined in the I²C-Bus Specification [1]: standard mode (100 kbps) and fast mode (400 kbps), and high-speed mode (3.4 Mbps). The interface adds flexibility to the power supply solution, enabling most functions to be programmed to new values depending on the instantaneous application requirements. Register contents remain intact as long as supply voltage remains above 2.1 V.

The data transfer protocol for standard and fast modes is exactly the same; therefore, they are referred to as F/S-mode in this document. The protocol for high-speed mode is different from F/S-mode, and it is referred to as HS-mode. The TPS6132x device supports 7-bit addressing; 10-bit addressing and general call address are not supported. The device 7-bit address is defined as '011 0011' (TPS61325) and '011 0010' (TPS61326).

9.3.14.1 F/S-Mode Protocol

The master initiates data transfer by generating a start condition. The start condition is when a high-to-low transition occurs on the SDA line while SCL is high, as shown in Figure 40. All I²C-compatible devices must recognize a start condition.

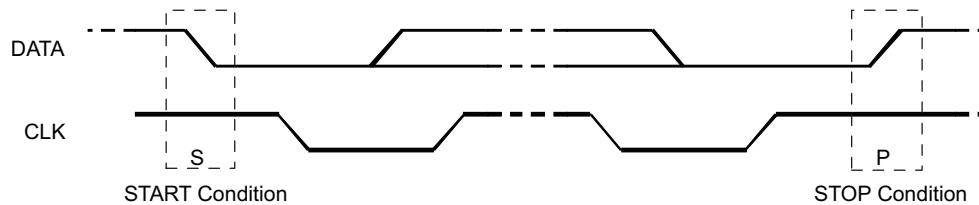


Figure 40. START and STOP Conditions

The master then generates the SCL pulses, and transmits the 7-bit address and the read/write direction bit (R/W) on the SDA line. The master ensures that data is valid during all transmissions. A valid data condition requires the SDA line to be stable during the entire high period of the clock pulse (see Figure 41). All devices receive the address sent by the master and compare it to their internal fixed addresses. Only the slave device with a matching address generates an acknowledgement (see Figure 42) by pulling the SDA line low during the entire high period of the ninth SCL cycle. Upon detecting this acknowledgement, the master knows that communication link with a slave is established.

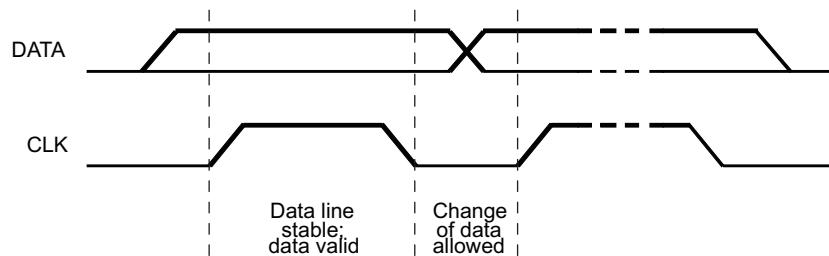


Figure 41. Bit Transfer on the Serial Interface

The master generates further SCL cycles to either transmit data to the slave (R/W bit 1) or receive data from the slave (R/W bit 0). In either case, the receiver must acknowledge the data sent by the transmitter. So an acknowledgement signal can either be generated by the master or by the slave, depending on which one is the receiver. 9-bit valid data sequences consisting of 8 data bits and a 1-bit acknowledgement can continue as long as necessary.

To signal the end of the data transfer, the master generates a stop condition by pulling the SDA line from low to high while the SCL line is high (see Figure 40). This releases the bus and stops the communication link with the addressed slave. All I²C compatible devices must recognize the stop condition. Upon the receipt of a stop condition, all devices know that the bus is released, and they wait for a start condition followed by a matching address.

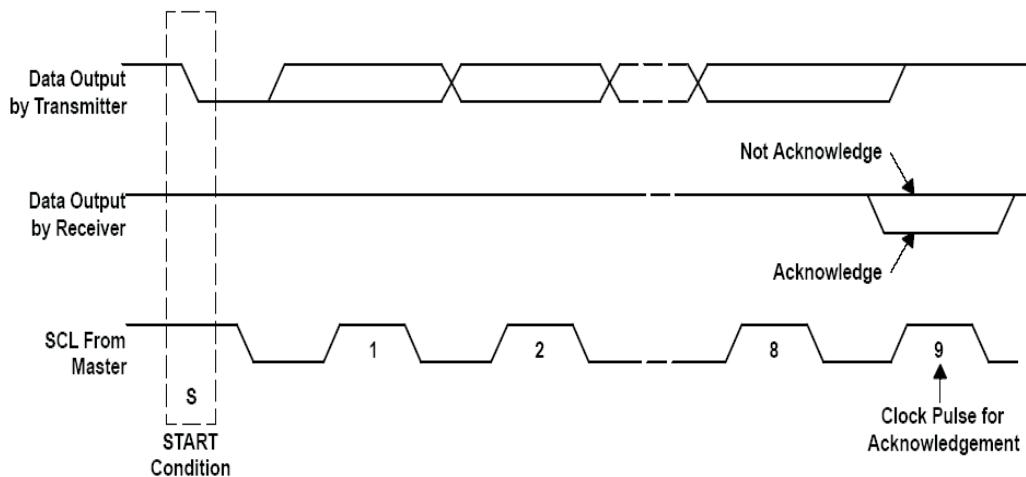


Figure 42. Acknowledge on the I²C Bus

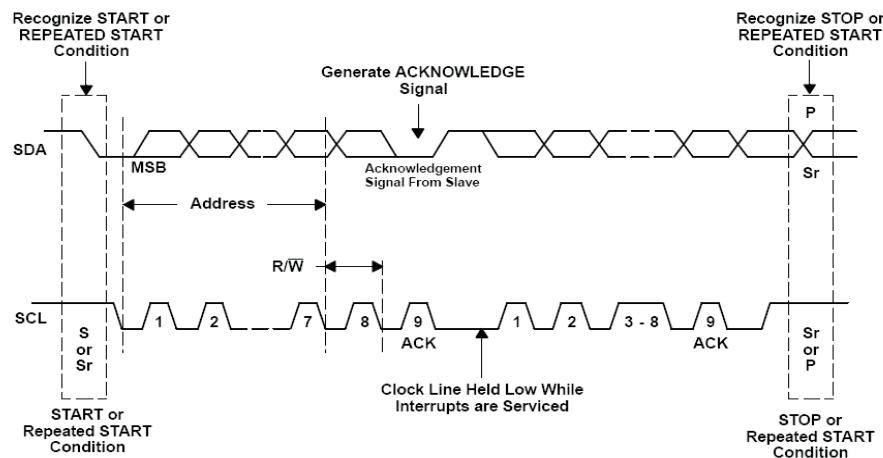


Figure 43. Bus Protocol

9.3.14.2 HS-Mode Protocol

The master generates a start condition followed by a valid serial byte containing HS master code 00001xxx. This transmission is made in F/S-mode at no more than 400 Kbps. No device is allowed to acknowledge the HS master code, but all devices must recognize it and switch their internal setting to support 3.4-Mbps operation.

The master then generates a *repeated start condition*, a repeated start condition has the same timing as the start condition. After this repeated start condition, the protocol is the same as F/S-mode, except that transmission speeds up to 3.4 Mbps are allowed. A stop condition ends the HS-mode and switches all the internal settings of the slave devices to support the F/S-mode. Instead of using a stop condition, repeated start conditions must be used to secure the bus in HS-mode.

9.4 Device Functional Modes

9.4.1 Down Mode In Voltage Regulation Mode

In general, a boost converter only regulates output voltages which are higher than the input voltage. The featured devices come with the ability to regulate 4.2 V at the output with an input voltage as high as 5.5 V. To control these applications properly, a down conversion mode is implemented.

In voltage regulation mode, if the input voltage reaches or exceeds the output voltage, the converter changes to the down-conversion mode. In this mode, the control circuit changes the behavior of the rectifying PMOS. It sets the voltage drop across the PMOS as high as necessary to regulate the output voltage. This means the power losses in the converter increase. This must be taken into account for thermal consideration. The down conversion mode is automatically turned off as soon as the input voltage falls about 200 mV below the output voltage.

For proper operation in down conversion mode the output voltage must not be programmed higher than approximately 5.3 V. Take care not to violate the absolute maximum ratings at the SW pins.

The TPS6132x device uses a control architecture that allows *recycling* excessive energy that might be stored in the output capacitor. By reversing the operation of the boost power stage, the converter is capable of transferring energy from its output back into the input source.

In high-current mode (HC_SEL = 1), this feature becomes useful to dynamically adjust the output voltage (V_{OUT}) depending on the operating conditions. For example, 4.95 V constant output voltage to support audio applications or variable storage capacitor precharge voltage, see [Figure 76](#).

This reverse operating mode can only perform within an output voltage range higher than the input supply. For example, if the storage capacitor is initially precharged to 4.95 V, the input voltage is around 4.1 V and the target output voltage is set to 3.825 V, the converter is only able to lower the output node down to the input level.

9.4.2 Power-Save Mode Operation, Efficiency

The TPS6132x device integrates a power save mode to improve efficiency at light load. In power save mode the converter only operates when the output voltage trips below a set threshold voltage. It ramps up the output voltage with one or several pulses and goes again into power save mode once the output voltage exceeds the set threshold voltage.

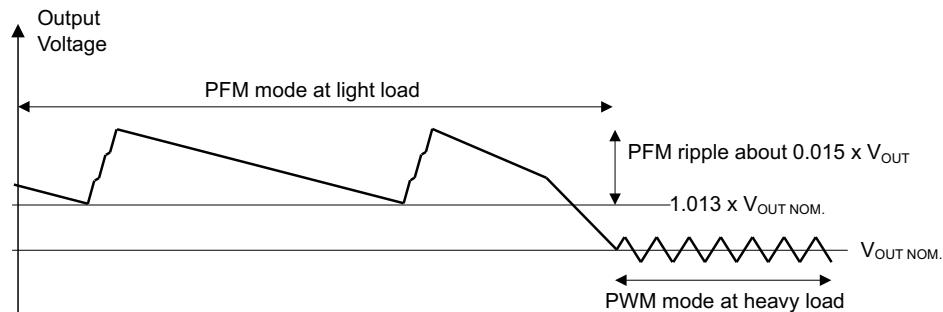


Figure 44. Operation in PFM Mode and Transfer to PWM Mode

The power save mode can be enabled and disabled through the ENPSM bit. In down conversion mode, power save mode is always active and the device cannot be forced into fixed frequency operation at light loads.

The LED sense voltage has a direct effect on the converter's efficiency. Because the voltage across the low-side current regulator does not contribute to the output power, LED brightness, reducing the sense voltage increases the efficiency of the device.

Device Functional Modes (continued)

In direct drive mode ($HC_SEL = L$), the energy is being directly transferred from the battery to the LEDs. The integrated current control loop automatically selects the minimum boosting ratio to maintain regulation based on the LED forward voltage and current requirements. The low-side current regulators drop the voltage difference between the input voltage and the LEDs forward voltage ($V_{F(LED)} < V_{IN}$). When running in boost mode ($V_{F(LED)} > V_{IN}$), the voltage present at the LED_x pins of the low-side current regulators is typically 400 mV, leading to high power conversion efficiency. Depending on the input voltage and the LEDs forward voltage characteristic, the converter shows efficiency in the range of about 75% to 90%.

In high-current mode ($HC_SEL = H$), the device is only supplying a limited amount of energy directly from the battery, for example, DC-light, contribution to flash current, or voltage regulation mode. During a flash strobe, the bulk of the energy supplied to the LEDs is provided by the reservoir capacitor. The low-side current regulators typically operate with 400-mV headroom voltage. This means the power losses in the device increase and thermal considerations become more important.

9.4.3 Mode Of Operation: DC-Light and Flashlight

Operation is understood best by referring to [Figure 30](#). The device set to one of four different operating modes depending on the state of the MODE_CTRL bits.

- MODE_CTRL = 00: The device is in shutdown mode.
- MODE_CTRL = 01: The STRB0 and STRB1 inputs are disabled. The device is regulating the LED current in DC-light mode (DCLC bits) regardless of the STRB0 and STRB1 inputs and the START_FLASH/TIMER (SFT) bit. To avoid device shutdown by DC-light safety timeout, MODE_CTRL must be refreshed within less than 13 s (STRB1 = 0). The DC-light watchdog timer can be disabled by pulling the STRB1 signal high.
- MODE_CTRL = 10: The STRB0 and STRB1 inputs are enabled and the flashlight pulse can either be triggered by these synchronization signals or by a software command (START_FLASH/TIMER (SFT) bit, STRB0 = 1). The LEDs' operation is enabled or disabled according to the STRB0 and STRB1 inputs, the flashlight safety timer is activated and the DC-light safety timer is disabled.
- MODE_CTRL = 11: The device is regulating a constant output voltage according to OV bits' settings. The low-side LEDx current regulators are disabled and the LEDs are disconnected from the output. In this operating mode, the safety timer is disabled.

9.4.4 Flash Strobe Is Level Sensitive (STT = 0): LED Strobe Follows STRB0 and STRB1 Inputs

In this mode, the high-power LEDs are driven at the flashlight current level and the safety timer (STIM) is running. The maximum duration of the flashlight pulse is defined in the STIM register.

The safety timer is triggered on rising edge and stopped either by a negative logic on the synchronization source (STRB0 = STRB1 = 0) or by a timeout event (TO bit).

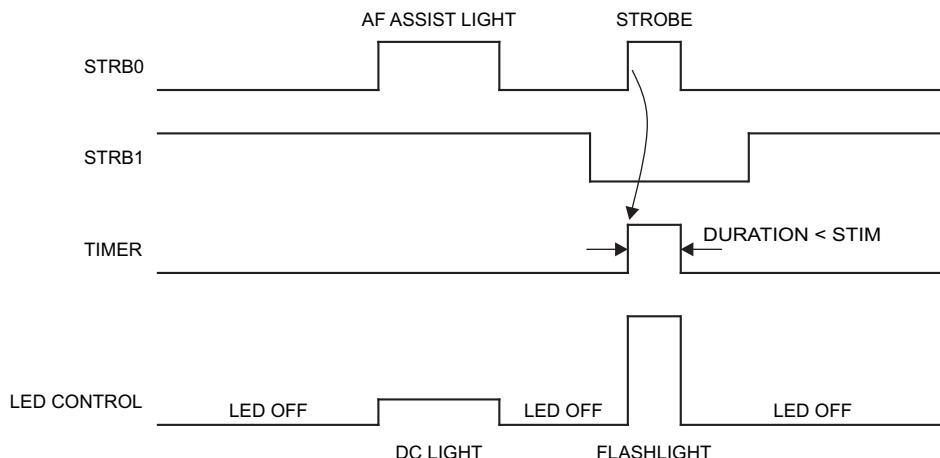



Figure 45. Hardware Synchronized DC-Light and Flashlight Strobe

Device Functional Modes (continued)

9.4.5 Flash Strobe Is Leading Edge Sensitive (STT = 1): One-Shot LED Strobe

In this mode, the high-power LEDs are driven at the flashlight current level and the safety timer (STIM) is running. The duration of the flashlight pulse is defined in the STIM register.

The flashlight strobe is started either by a rising edge on the synchronization source (STRB0 = 1 and STRB1 = 0) or by a positive transition on the START-FLASH/TIMER (SFT) bit (STRB0 = 1 and STRB1 = 0). Once running, the timer ignores all kind of triggering signals and only stops after a timeout (TO). START-FLASH/TIMER (SFT) bit is being reset by the timeout (TO) signal.

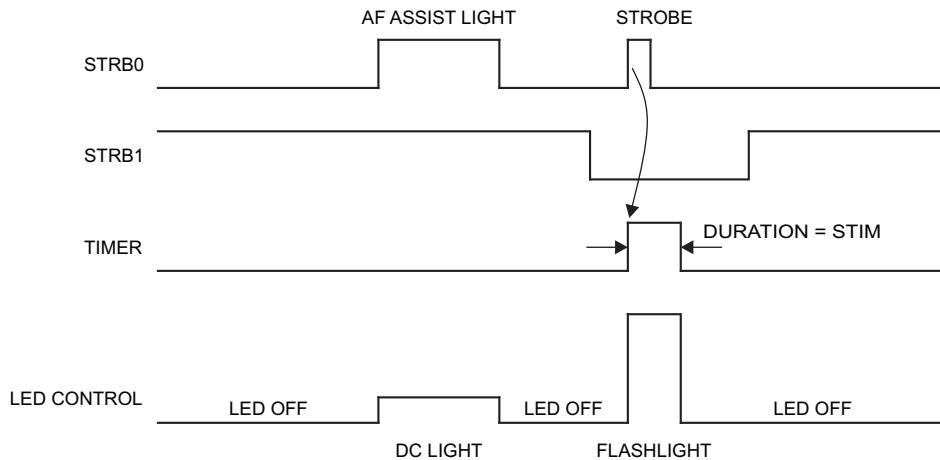

**Figure 46. Edge Sensitive Timer
(Single Trigger Event)**

9.4.6 LED Failure Modes and Overvoltage Protection

If a high-power LED fails as a short circuit, the low-side current regulator limits the maximum output current and the HIGH-POWER LED FAILURE (HPLF) flag is set.

If a high-power LED fails as an open circuit, the control loop initially attempts to regulate off of its low-side current regulator feedback signal. This drives V_{OUT} higher. As the open circuited LED never accepts its programmed current, V_{OUT} must be voltage-limited by means of a secondary control loop.

The TPS6132x device limits V_{OUT} according to the overvoltage protection settings (see [Figure 47](#)). In this failure mode, V_{OUT} is either limited to 4.65 V (typical) or 6.0 V (typical) and the HIGH-POWER LED FAILURE (HPLF) flag is set.

Table 7. OVP Threshold

| OVP THRESHOLD | OPERATING CONDITIONS |
|------------------|---------------------------------|
| 4.65 V (typical) | HC_SEL = L and 0000 ≤ OV ≤ 0100 |
| 6 V (typical) | HC_SEL = H or 0101 ≤ OV ≤ 1111 |

See [LED High-current Regulators, Unused Inputs](#) for more information.

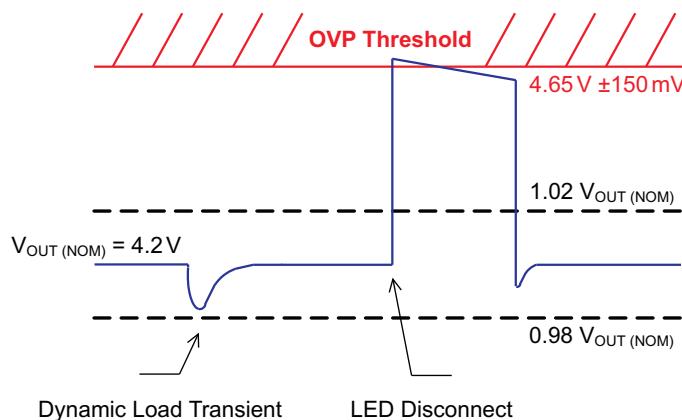


Figure 47. Overvoltage Protection Operation, 4.65 V (Typical)

9.4.7 Hardware Voltage Mode Selection

The TPS6132x device integrates a software control bit (ENVM) that can be used to force the converter to run in voltage mode regulation. [Table 8](#) gives an overview of the different modes of operation.

Table 8. Operating Mode Description

| INTERNAL REGISTER SETTINGS MODE_CTRL | ENVM | OPERATING MODES |
|--------------------------------------|------|---|
| 00 | 0 | The converter is in shutdown mode and the load is disconnected from the battery. |
| 01 | 0 | LEDs are turned on for DC-light operation (for example, a movie light). The converter is operating in the current regulation mode (CM). The output voltage is controlled by the forward voltage characteristic of the LED. The energy is being directly transferred from the battery to the output. |
| 10 | 0 | <p>The converter is operating in the current regulation mode (CM). The output voltage is controlled by the forward voltage characteristic of the LED. LEDs are ready for flashlight operation supported directly from the battery.</p> <p>In high-current mode (HC_SEL = H), the energy is supplied by the output reservoir capacitor and the inductive power stage is turned off for the flash strobe period of time.</p> |
| 11 | 0 | LEDs are turned off and the converter is operating in the voltage regulation mode (VM). The output voltage is set through the register OV. |
| 00 | 1 | LEDs are turned off and the converter is operating in the voltage regulation mode (VM). The output voltage is set through the register OV. |
| 01 | 1 | <p>The converter is operating in the voltage regulation mode (VM) and the output voltage is set through the register OV. The LED currents are regulated by the low-side current sinks. The LEDs are turned on for DC-light operation and the energy is being directly transferred from the battery to the output.</p> |
| 10 | 1 | <p>The converter is operating in the voltage regulation mode (VM) and the output voltage is set through the register OV. The LED currents are regulated by the low-side current sinks. The LEDs are ready for flashlight operation.</p> <p>In direct drive mode (HC_SEL = L), the energy is being directly transferred from the battery to the output.</p> <p>In high-current mode (HC_SEL = H), the energy is largely supplied by the output reservoir capacitor. However, the inductive power stage is active, and contributing to the flash power.</p> |
| 11 | 1 | LEDs are turned off and the converter is operating in the voltage regulation mode (VM). The output voltage is set through the register OV. |

9.4.8 Flashlight Blanking (Tx-MASK)

In direct drive mode (HC_SEL = 0), the Tx-MASK input signal can be used to disable the flashlight operation, for example, during a RF PA transmission pulse. This blanking function turns the LED from flashlight to DC-light thereby reducing almost instantaneously the peak current loading from the battery. The Tx-MASK function has no influence on the safety timer duration.

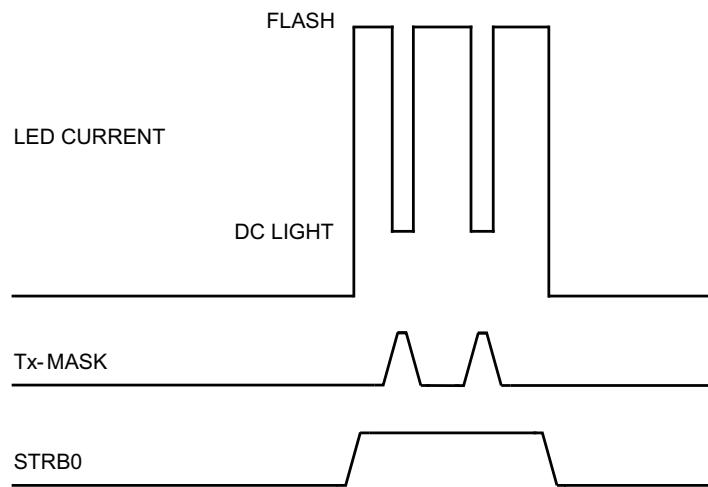


Figure 48. Synchronized Flashlight With Blanking Periods (STRB1 = 0)

In high-current mode (HC_SEL = 1), the Tx-MASK input pin is also used to dynamically adjust the device's current limit setting, controlling the maximum current drawn from the input source. See [Current Limit Operation](#) for additional information.

9.4.9 Shutdown

Pulling the MODE_CTRL bits low forces the device into shutdown, but only if ENVM = 0.

In direct-drive mode (HC_SEL = L) the regulator stops switching, the high-side PMOS disconnects the load from the input, and the LEDx pins are high impedance thus eliminating any DC conduction path. The TPS6132x device actively discharges the output capacitor when it turns off.

The integrated discharge resistor has a typical resistance of $2\text{ k}\Omega$, equally split between VOUT to BAL and BAL to GND outputs. The required time to discharge the output capacitor at VOUT depends on load current and the effective output capacitance. The active balancing circuit is disabled and the device consumes only a shutdown current of $1\text{ }\mu\text{A}$ (typical).

In high-current mode (HC_SEL = H), the device maintains its output biased at the input voltage level. The synchronous rectifier is current limited, for example, precharge current, in this mode, allowing external load, for example, an audio amplifier, to be powered with a restricted supply. The active balancing circuit is enabled and the device consumes only a standby current of $5\text{ }\mu\text{A}$ (typical).

9.4.10 Thermal Shutdown

As soon as the junction temperature, T_J , exceeds 160°C (typical), the device goes into thermal shutdown. In this mode, the power stage and the low-side current regulators are turned off, the HOTDIE bits are set and can only be reset by a readout.

In the voltage mode operation (MODE_CTRL = 11 or ENVM = 1), the device continues operation when the junction temperature falls below 140°C (typical) again. In the current regulation mode, DC-light or flashlight modes, the device operation is suspended.

9.5 Programming

9.5.1 TPS6132x I²C Update Sequence

The TPS6132x requires a start condition, a valid I²C address, a register address byte, and a data byte for a single update. After the receiving each byte, the TPS6132x device acknowledges by pulling the SDA line low during the high period of a single clock pulse. A valid I²C address selects the TPS6132x. The TPS6132x performs an update on the falling edge of the acknowledge signal that follows the LSB byte.

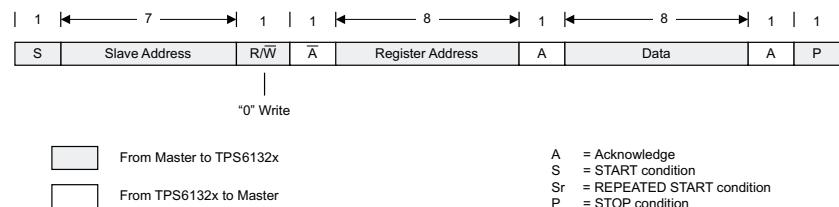


Figure 49. Write Data Transfer Format in F/S-Mode

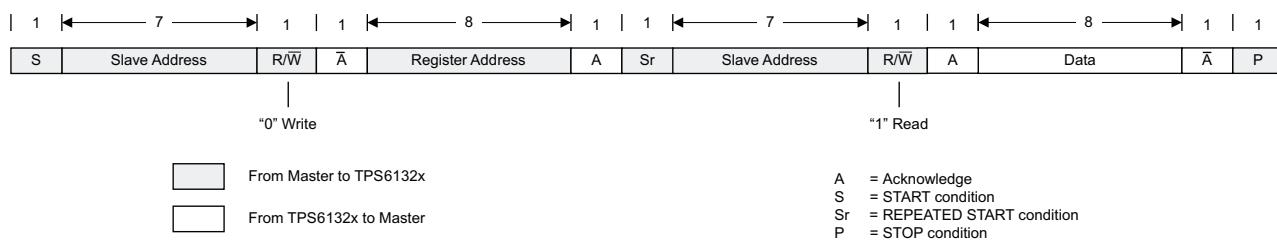


Figure 50. Read Data Transfer Format in F/S-Mode

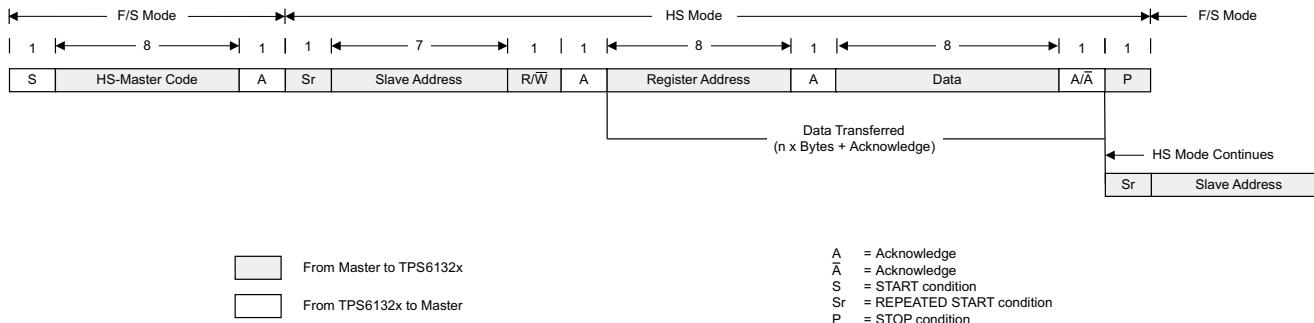


Figure 51. Data Transfer Format in H/S-Mode

9.6 Register Maps

9.6.1 Slave Address Byte

Figure 52. Slave Address Byte Description

| MSB | | | | | | | | LSB |
|-----|---|---|---|---|---|----|----|-----|
| X | X | X | X | X | X | A1 | A0 | |

The slave address byte is the first byte received following the START condition from the master device.

9.6.2 Register Address Byte

Figure 53. Register Address Byte Description

| MSB | | | | | | | | LSB |
|-----|---|---|---|----|----|----|----|-----|
| 0 | 0 | 0 | 0 | 00 | D2 | D1 | D0 | |

Following the successful acknowledgement of the slave address, the bus master sends a byte to the TPS6132x, which contains the address of the register to be accessed.

9.6.3 REGISTER0 (address = 0x00)

Figure 54. REGISTER0 Fields

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------|-------|-------|--------|-------|-------|-------|-------|
| RESET | FREE | | DCLC13 | | DCLC2 | | |
| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-1 | R/W-0 | R/W-1 | R/W-0 |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

Table 9. REGISTER0 Field Descriptions

| Bit | Field | Type | Reset | Description |
|-------|--------|------|-------|--|
| D7 | RESET | R/W | 0 | Register reset 0: Normal operation 1: Default values are set to all internal registers |
| D5–D3 | DCLC13 | R/W | 001 | DC-light current control (LED1 and LED3) 000: 0 mA ⁽¹⁾⁽²⁾ 001: 28.0 mA 010: 55.75 mA 011: 83.25 mA 100: 111.0 mA 101: 138.75 mA 110: 166.5 mA 111: 194.25 mA |
| D2–D0 | DCLC2 | R/W | 010 | DC-light current control (LED2) 000: 0 mA ⁽¹⁾⁽²⁾ 001: 28.0 mA 010: 55.75 mA 011: 83.25 mA 100: 111.0 mA 101: 138.75 mA 110: 166.5 mA, 249.75 mA current level can be activated simultaneously with Tx-MASK = 1 111: 194.25 mA, 360.75 mA current level can be activated simultaneously with Tx-MASK = 1 |

(1) LEDs are off, V_{OUT} set according to OV.

(2) When DCLC2 and DCLC13 are both reset, the device operates in voltage regulation mode. The output voltage is set according to OV.

9.6.4 REGISTER1 (address = 0x01)

Figure 55. REGISTER1 Fields

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------|-----------|-------|-------|-------|-------|-------|-------|
| | MODE_CTRL | | | FC2 | | | |
| R/W-0 | R/W-0 | R/W-0 | R/W-1 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

Table 10. REGISTER1 Field Descriptions

| Bit | Field | Type | Reset | Description |
|-------|-----------|------|--------|--|
| D7–D6 | MODE_CTRL | R/W | 00 | Mode control 00: Device in shutdown mode 01: Device operates in DC-light mode 10: Device operates in flashlight mode 11: Device operates as constant voltage source To avoid device shutdown by DC-light safety timeout, MODE_CTRL bits must be refreshed within less than 13 s. Writing to REGISTER1[7:6] automatically updates REGISTER2[7:6]. |
| D5–D0 | FC2 | R/W | 010000 | Flash current control (LED2) HC_SEL = 0 000000: 0 mA ⁽¹⁾⁽²⁾ HC_SEL = 1 000000: 0 mA ⁽¹⁾⁽²⁾ 000001: 28.0 mA 000001: 64 mA 000010: 55.75 mA 000010: 130 mA 000011: 83.25 mA 000011: 196 mA 000100: 111.0 mA 000100: 260 mA 000101: 138.75 mA 000101: 324 mA 000110: 166.5 mA 000110: 388 mA 000111: 194.25 mA 000111: 452 mA 001000: 222.0 mA 001000: 516 mA 001001: 249.75 mA 001001: 580 mA 001010: 277.5 mA 001010: 644 mA 001011: 305.25 mA 001011: 708 mA 001100: 333.0 mA 001100: 772 mA 001101: 360.75 mA 001101: 836 mA 001110: 388.5 mA 001110: 900 mA 001111: 416.25 mA 001111: 964 mA 010000: 444.0 mA 010000: 1028 mA 010001: 471.75 mA 010001: 1092 mA 010010: 499.5 mA 010010: 1156 mA 010011: 527.25 mA 010011: 1220 mA 010100: 555.0 mA 010100: 1284 mA 010101: 582.75 mA 010101: 1348 mA 010110: 610.5 mA 010110: 1412 mA 010111: 638.25 mA 010111: 1476 mA 011000: 666.0 mA 011000: 1540 mA 011001: 693.75 mA 011001: 1604 mA 011010: 721.5 mA 011010: 1668 mA 011011: 749.25 mA 011011: 1732 mA 011100: 777.0 mA 011100: 1796 mA 011101: 804.75 mA 011101: 1860 mA 011110: 832.5 mA 011110: 1924 mA 011111: 860.25 mA 011111: 1988 mA ≥100000: 888.0 mA ≥100000: 2052 mA |

 (1) LEDs are off, V_{OUT} set according to OV.

(2) When FC13 and FC2 are both reset, the device operates in voltage regulation mode. The output voltage is set according to OV.

9.6.5 REGISTER2 (address = 0x02)

Figure 56. REGISTER2 Fields

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-----------|-------|-------|-------|-------|-------|-------|-------|
| MODE_CTRL | ENVM | | | | FC13 | | |
| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-1 | R/W-0 | R/W-0 | R/W-0 |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

Table 11. REGISTER2 Field Descriptions

| Bit | Field | Type | Reset | Description | | | |
|-------|-----------|------|-------|---|--|--|--|
| D7–D6 | MODE_CTRL | R/W | 00 | Mode control 00: Device in shutdown mode 01: Device operates in DC-light mode 10: Device operates in flashlight mode 11: Device operates as constant voltage source To avoid device shutdown by DC-light safety timeout, MODE_CTRL bits must be refreshed within less than 13 s. Writing to REGISTER2[6:5] automatically updates REGISTER1[6:5]. | | | |
| D5 | ENVM | R/W | 0 | Enable voltage mode 0: Normal operation 1: Forces the device into a constant voltage source In read mode, the ENVM bit returns zero. | | | |
| D4–D0 | FC13 | R/W | 0100 | Flash current control (LED1 and LED3) HC_SEL = 0 00000: 0 mA ⁽¹⁾⁽²⁾ HC_SEL = 1 00000: 0 mA ⁽¹⁾⁽²⁾ 00001: 27.75 mA 00001: 64.5 mA 00010: 55.5 mA 00010: 127.0 mA 00011: 83.25 mA 00011: 192.0 mA 00100: 111.0 mA 00100: 256.0 mA 00101: 138.75 mA 00101: 320.25 mA 00110: 166.5 mA 00110: 384.5 mA 00111: 194.25 mA 00111: 448.75 mA 01000: 222.0 mA 01000: 513.0 mA 01001: 249.75 mA 01001: 577.25 mA 01010: 277.5 mA 01010: 641.5 mA 01011: 305.25 mA 01011: 705.75 mA 01100: 333.0 mA 01100: 770.0 mA 01101: 360.75 mA 01101: 834.25 mA 01110: 388.5 mA 01110: 898.5 mA 01111: 416.25 mA 01111: 962.75 mA ≥10000: 444.0 mA ≥10000: 1027.0 mA | | | |

(1) LEDs are off, V_{OUT} set according to OV.

(2) When FC13 and FC2 are both reset, the device operates in voltage regulation mode. The output voltage is set according to OV.

9.6.6 REGISTER3 (address = 0x03)

Figure 57. REGISTER3 Fields

| | | | | | | | |
|-------|-------|-------|-------|---------------|-------|-------|---------|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| STIM | | | HPLF | SELSTIM TO | STT | SFT | Tx-MASK |
| R/W-1 | R/W-1 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-1 |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

Table 12. REGISTER3 Field Descriptions

| Bit | Field | Type | Reset | Description |
|-------|---------|------|-------|--|
| D7–D5 | STIM | R/W | 110 | Safety timer STIM: RANGE 0, RANGE 1 000: 68.2 ms, 5.3 ms 001: 102.2 ms, 10.7 ms 010: 136.3 ms, 16.0 ms 011: 170.4 ms, 21.3 ms 100: 204.5 ms, 26.6 ms 101: 340.8 ms, 32.0 ms 110: 579.3 ms, 37.3 ms 111: 852 ms, 71.5 ms |
| D4 | HPFL | R | 0 | High-power LED failure flag 0: Proper LED operation 1: LED failed (open or shorted) High-power LED failure flag is reset after readout |
| D3 | SELSTIM | W | 0 | Safety timer selection range (write only) 0: Safety timer range 0 1: Safety timer range 1 |
| | TO | R | | Time-out flag (read only) 0: No time-out event occurred 1: Time-out event occurred. Time-out flag is reset at re-start of the safety timer. |
| D2 | STT | R/W | 0 | Safety timer trigger 0: LED safety timer is level sensitive 1: LED safety timer is rising edge sensitive This bit is only valid for MODE_CTRL = 10. |
| D1 | SFT | R/W | 0 | Start/Flash timer In write mode, this bit initiates a flash strobe sequence. Notice that this bit is only active when STRB0 input is high. 0: No change in the high-power LED current 1: High-power LED current ramps to the flash current level In read mode, this bit indicates the high-power LED status 0: High-power LEDs are idle 1: Ongoing high-power LED flash strobe |
| D0 | Tx-MASK | R/W | 1 | Flash blanking control bit In write mode, this bit enables/disables the flash blanking/LED current reduction function. 0: Flash blanking disabled 1: LED current is reduced to DC-light level when Tx-MASK input is high In read mode, this flag indicates whether or not the flashlight masking input is activated. Tx-MASK flag is reset after readout of the flag. 0: No flash blanking event occurred 1: Tx-MASK input triggered |

9.6.7 REGISTER4 (address = 0x04)

Figure 58. REGISTER4 Fields

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------|--------|-----|-------|-------|-------|-------|-------|
| PG | HOTDIE | | ILIM | | INDC | | |
| R/W-0 | R-0 | R-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

Table 13. REGISTER4 Field Descriptions

| Bit | Field | Type | Reset | Description | | | |
|-------|--------|------|-------|--|---|--|--|
| D7 | PG | R/W | 0 | Power good In write mode, this bit selects the functionality of the GPIO/PG output. 0: PG signal is routed to the GPIO port. 1: GPIO PORT VALUE bit is routed to the GPIO port. In read mode, this bit indicates the output voltage conditions. 0: The converter is not operating within the voltage regulation limits. 1: The output voltage is within its nominal value. | | | |
| D6–D5 | HOTDIE | R | 00 | Instantaneous die temperature 00: $T_J < 55^{\circ}\text{C}$ 01: $55^{\circ}\text{C} < T_J < 70^{\circ}\text{C}$ 10: $T_J > 70^{\circ}\text{C}$ 11: Thermal shutdown tripped. Indicator flag is reset after readout. | | | |
| D4 | ILIM | R/W | 0 | Inductor valley current limit The ILIM bit can only be set before the device enters operation (initial shutdown state). Valley current limit: ILIM bit, HC_SEL input, Tx-MASK input 1150 mA: Low, Low, Low 1600 mA: High, Low, Low 30 mA: Low, High, Low 250 mA: High, High, Low 1150 mA: Low, Low, High 1600 mA: High, Low, High — ⁽¹⁾ : Low, High, High — ⁽¹⁾ : High, High, High | | | |
| D3–D0 | INDC | R/W | 0000 | Indicator light control INDC: Privacy indicator INDLED channel 0000: Privacy indicator OFF 0001: INDLED current 2.6 mA ⁽²⁾ 0010: INDLED current 5.2 mA ⁽²⁾ 0011: INDLED current 7.9 mA ⁽²⁾ 0100: Privacy indicator OFF 0101: INDLED current 5.2 mA ⁽²⁾ 0110: INDLED current 10.4 mA ⁽²⁾ 0111: INDLED current 15.8 mA ⁽²⁾ | INDC: Privacy indicator LEDx channels ⁽³⁾ 1000: 5% PWM dimming ratio 1001: 11% PWM dimming ratio 1010: 17% PWM dimming ratio 1011: 23% PWM dimming ratio 1100: 30% PWM dimming ratio 1101: 36% PWM dimming ratio 1110: 48% PWM dimming ratio 1111: 67% PWM dimming ratio | | |

(1) The DC-DC power stage is disabled, zero current is being drained from the input source.

(2) For HC_SEL = L, the output node (VOUT) is internally pulled to ground.

(3) This mode of operation can only be activated for MODE_CTRL = 01, ENVM = 1, and STRB1 = 0.

9.6.8 REGISTER5 (address = 0x05)

Figure 59. REGISTER5 Fields

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|-------|------------------------|-------|----------|--------|--------|--------|
| SELCAL | ENPSM | DIR (W) STSTRB1 (R) | GPIO | GPIOTYPE | ENLED3 | ENLED2 | ENLED1 |
| R/W-0 | R/W-1 | R/W-1 | R/W-0 | R/W-1 | R/W-0 | R/W-1 | R/W-0 |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

Table 14. REGISTER5 Field Descriptions

| Bit | Field | Type | Reset | Description |
|-----|----------|------|-------|--|
| D7 | SELCAL | W | 0 | High-current LED forward voltage self-calibration start In write mode, this bit enables/disables the output voltage vs LED forward voltage/current self-calibration procedure. 0: Self-calibration disabled 1: Self-calibration enabled In read mode, this bit returns the status of the self-calibration procedure. 0: Self-calibration ongoing 1: Self-calibration done Notice that this bit is only being reset at the (re-)start of a calibration cycle. |
| D6 | ENPSM | R/W | 1 | Enable or disable power-save mode 0: Power-save mode disabled 1: Power-save mode enabled |
| D5 | STSTRB1 | R | 1 | STRB1 input status (read only) This bit indicates the logic state on the STRB1 state. |
| D5 | DIR | W | 1 | GPIO direction 0: GPIO configured as input 1: GPIO configured as output |
| D4 | GPIO | R/W | 0 | GPIO port value This bit contains the GPIO port value. |
| D3 | GPIOTYPE | R/W | 1 | GPIO port type 0: GPIO is configured as push-pull output 1: GPIO is configured as open-drain output |
| D2 | ENLED3 | R/W | 0 | Enable or Disable High-Current LED3 0: LED3 input is disabled 1: LED3 input is enabled |
| D1 | ENLED2 | R/W | 1 | Enable or disable high-current LED2 0: LED2 input is disabled 1: LED2 input is enabled |
| D0 | ENLED1 | R/W | 0 | Enable or disable high-current LED1 0: LED1 input is disabled 1: LED1 input is enabled |

9.6.9 REGISTER6 (address = 0x06)

Figure 60. REGISTER6 Fields

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------|--------|---------|--------|-------|-------|-------|-------|
| ENTS | LEDHOT | LEDWARN | LEDHDR | | | OV | |
| R/W-0 | R/W-0 | R-0 | R-0 | R/W-1 | R/W-0 | R/W-0 | R/W-1 |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

Table 15. REGISTER6 Field Descriptions

| Bit | Field | Type | Reset | Description |
|-------|---------|------|-------|---|
| D7 | ENTS | R/W | 0 | Enable or disable LED temperature monitoring 0: LED temperature monitoring disabled 1: LED temperature monitoring enabled |
| D6 | LEDHOT | R/W | 0 | LED excessive temperature flag This bit can be reset by writing a logic level zero. 0: TS input voltage > 0.345 V 1: TS input voltage < 0.345 V |
| D5 | LEDWARN | R | 0 | LED temperature warning flag (read only) This flag is reset after readout. 0: TS input voltage > 1.05 V 1: TS input voltage < 1.05 V |
| D4 | LEDHDR | R | 0 | LED high-current regulator headroom voltage monitoring This bit returns the headroom voltage status of the LED high-current regulators. This value is being updated at the end of a flash strobe, before to the LED current ramp-down phase. 0: Low headroom voltage 1: Sufficient headroom voltage |
| D3–D0 | OV | R/W | 1001 | Output voltage selection In read mode, these bits return the result of the high-current LED forward voltage self-calibration procedure. In write mode, these bits are used to set the target output voltage (see Down Mode In Voltage Regulation Mode). In applications requiring dynamic voltage control, take care to set the new target code after voltage mode operation is enabled (MODE_CTRL = 11 or ENVM bit = 1). OV: Target output voltage 0000: 3.825 V 0001: 3.950 V 0010: 4.075 V 0011: 4.200 V 0100: 4.325 V 0101: 4.450 V 0110: 4.575 V 0111: 4.700 V 1000: 4.825 V 1001: 4.950 V 1010: 5.075 V 1011: 5.200 V 1100: 5.325 V 1101: 5.450 V 1110: 5.575 V 1111: 5.700 V |

9.6.10 REGISTER7 (address = 0x07)

Figure 61. REGISTER7 Fields

| | | | | | | | |
|-------|-------|-------|-------|-------|-----|-----|-----|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| REVID | | | | | | | |
| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R-1 | R-1 | R-0 |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

Table 16. REGISTER7 Field Descriptions

| Bit | Field | Type | Reset | Description |
|-------|-------|------|-------|---------------------|
| D2–D0 | REVID | R | 110 | Silicon Revision ID |

10 Application and Implementation

NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

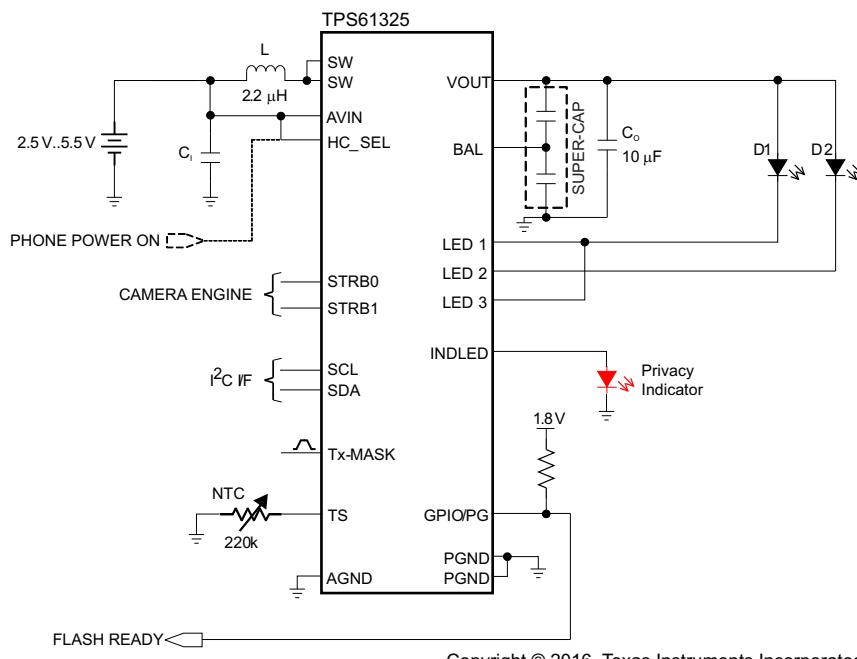
10.1 Application Information

The TPS6132x drives up to three white LEDs in parallel. The extended high-current mode (HC_SEL) allows up to 1025-mA and 2050-mA, and 1025-mA flash current out of the storage capacitor. The high-capacity storage capacitor on the output of the boost regulator provides the high-peak flash LED current, thereby reducing the peak current demand from the battery to a minimum.

In the TPS6132x device, the DC-light and flash can be controlled either by the I²C interface or by the means of hardware control signals (STRB0 and STRB1). The maximum duration of the flashlight pulse can be limited by means of an internal user programmable safety timer (STIM). The DC-light watchdog timer can be disabled by pulling high the STRB1 signal.

10.2 Typical Applications

10.2.1 4100-mA Two White High-Power LED Flashlight With Storage Capacitor



Copyright © 2016, Texas Instruments Incorporated

Figure 62. 4100-mA Two High-Power White LED Flashlight With Storage Capacitor Schematic

10.2.1.1 Design Requirements

In this application, the TPS61325 is required to drive a 4100-mA, two high-power white LED, flashlight with an input voltage range of 2.5 V to 5.5 V. This is a high-power LED application, so a storage capacitor is required to maintain sufficient headroom voltage across the LED current regulators for the entire strobe time and also minimize the power dissipation in the device.

Typical Applications (continued)

10.2.1.2 Detailed Design Procedure

10.2.1.2.1 Inductor Selection

A boost converter requires two main passive components for storing energy during the conversion. A boost inductor and a storage capacitor at the output are required. The TPS6132x device integrates a current limit protection circuitry. The valley current of the PMOS rectifier is sensed to limit the maximum current flowing through the synchronous rectifier and the inductor. The valley peak current limit (250 mA, 1150 mA, 1600 mA) is user selectable through the I²C interface.

To optimize solution size the TPS6132x device is designed to operate with inductance values from 1.3 μ H to 2.9 μ H. TI recommends 2.2- μ H inductance be used in typical high current white LED applications.

The highest peak current through the inductor and the power switch depends on the output load, the input and output voltages. Estimation of the maximum average inductor current and the maximum inductor peak current can be done using [Equation 2](#) and [Equation 3](#):

$$I_L \approx I_{OUT} \times \frac{V_{OUT}}{\eta \times V_{IN}} \quad (2)$$

$$I_{L(Peak)} = \frac{V_{IN} \times D}{2 \times f \times L} + \frac{I_{OUT}}{(1-D) \times \eta} \quad \text{with } D = \frac{V_{OUT} - V_{IN}}{V_{OUT}}$$

where

- f = switching frequency (2 MHz)
- L = inductance value (2.2 μ H)
- η = estimated efficiency (85%)

(3)

The losses in the inductor caused by magnetic hysteresis losses and copper losses are a major parameter for total circuit efficiency.

Table 17. List of Inductors

| MANUFACTURER | SERIES | DIMENSIONS | ILIM SETTINGS |
|--------------|-----------|---|-------------------|
| FDK | MIPST2520 | 2.5 mm x 2 mm x 0.8 mm (maximum) height | 250 mA (typical) |
| | MIP2520 | 2.5 mm x 2 mm x 1 mm (maximum) height | |
| | MIPSA2520 | 2.5 mm x 2 mm x 1.2 mm (maximum) height | |
| MURATA | LQM2HP-G0 | 2.5 mm x 2 mm x 1 mm (maximum) height | 1150 mA (typical) |
| | LQM2HP-GC | 2.5 mm x 2 mm x 1 mm (maximum) height | |
| TDK | VLF3014AT | 2.6 mm x 2.8 mm x 1.4 mm (maximum) height | 1600 mA (typical) |
| COILCRAFT | LPS3015 | 3 mm x 3 mm x 1.5 mm (maximum) height | |
| MURATA | LQH2HPN | 2.5 mm x 2 mm x 1.2 mm (maximum) height | |
| TOKO | FDSE0312 | 3 mm x 3 mm x 1.2 mm (maximum) height | 1600 mA (typical) |
| MURATA | LQM32PN | 3.2 mm x 2.5 mm x 1.2 mm (maximum) height | |

10.2.1.2.2 Input Capacitor

TI recommends low ESR ceramic capacitors for good input voltage filtering. TI recommends a 10- μ F input capacitor to improve transient behavior of the regulator and EMI behavior of the total power supply circuit. The input capacitor must be placed as close as possible to the input pin of the converter.

10.2.1.2.3 Output Capacitor

The major parameter necessary to define the output capacitor is the maximum allowed output voltage ripple of the converter. This ripple is determined by two parameters of the capacitor, the capacitance and the ESR. It is possible to calculate the minimum capacitance required for the defined ripple, supposing that the ESR is zero, by using [Equation 4](#):

$$C_{MIN} \approx \frac{I_{OUT} \times (V_{OUT} - V_{IN})}{f \times \Delta V \times V_{OUT}}$$

where

- f is the switching frequency
- ΔV is the maximum allowed ripple

(4)

With a chosen ripple voltage of 10 mV, a minimum capacitance of 10 μ F is required. The total ripple is larger due to the ESR of the output capacitor. This additional component of the ripple can be calculated using [Equation 5](#):

$$\Delta V_{ESR} = I_{OUT} \times R_{ESR} \quad (5)$$

The total ripple is the sum of the ripple caused by the capacitance and the ripple caused by the ESR of the capacitor. Additional ripple is caused by load transients. This means that the output capacitor must completely supply the load during the charging phase of the inductor. A reasonable value of the output capacitance depends on the speed of the load transients and the load current during the load change.

For the standard current white LED application ($HC_SEL = 0$, TPS6132x), a minimum of 3- μ F effective output capacitance is usually required when operating with 2.2- μ H (typical) inductors. For solution size reasons, this is usually one or more X5R or X7R ceramic capacitors.

Depending on the material, size, and therefore margin to the rated voltage of the used output capacitor, degradation on the effective capacitance can be observed. This loss of capacitance is related to the DC bias voltage applied. TI recommends checking that the selected capacitors are showing enough effective capacitance under real operating conditions.

To support high-current camera flash application ($HC_SEL = 1$), the converter is designed to work with a low voltage super-capacitor on the output to take advantage of the benefits they offer. A low-voltage super-capacitor in the 0.1-F to 1.5-F range, and with ESR larger than 40 m Ω , is suitable in the TPS6132x application circuit. For this device the output capacitor must be connected between the V_{OUT} pin and a good ground connection.

10.2.1.2.4 NTC Selection

The TPS6132x requires a negative thermistor (NTC) for sensing the LED temperature. Once the temperature monitoring feature is activated, a regulated bias current, approximately 24 μ A, is driven out of the TS port and produce a voltage across the thermistor.

If the temperature of the NTC-thermistor rises due to the heat dissipated by the LED, the voltage on the TS input pin decreases. When this voltage goes below the *warning threshold*, the LEDWARN bit in REGISTER6 is set. This flag is cleared by reading the register.

If the voltage on the TS input decreases further and falls below *hot threshold*, the LEDHOT bit in REGISTER6 is set and the device automatically goes into shutdown mode to avoid damaging the LED. This status is latched until the LEDHOT flag gets cleared by software.

The selection of the NTC-thermistor value strongly depends on the power dissipated by the LED and all components surrounding the temperature sensor and on the cooling capabilities of each specific application. With a 220-k Ω (at 25°C) thermistor, the valid temperature window is set from 60°C to 90°C. The temperature window can be enlarged by adding external resistors to the TS pin application circuit. To ensure proper triggering of the LEDWARN and LEDHOT flags in noisy environments, the TS signal may require additional filtering capacitance.

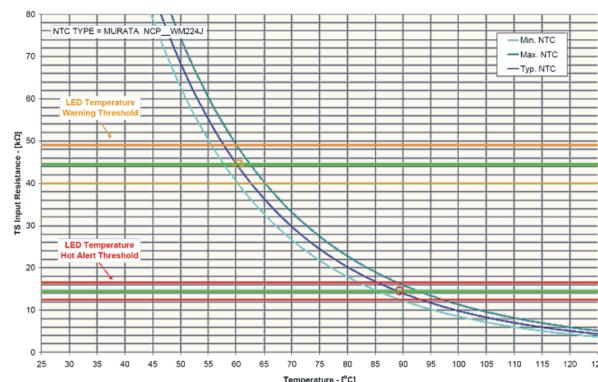


Figure 63. Temperature Monitoring Characteristic

Table 18. List of Negative Thermistor (NTC)

| MANUFACTURER | PART NUMBER | VALUE |
|--------------|-----------------|--------|
| MURATA | NCP18WM224J03RB | 220 kΩ |

10.2.1.2.5 Checking Loop Stability

The first step of circuit and stability evaluation is to look from a steady-state perspective at the following signals:

- Switching node (SW)
- Inductor current (I_L)
- Output ripple voltage ($V_{OUT(AC)}$)

These are the basic signals that must be measured when evaluating a switching converter. When the switching waveform shows large duty cycle jitter or the output voltage or inductor current shows oscillations the regulation loop may be unstable. This is often a result of improper board layout or inductor and capacitor combinations.

The load transient response must be tested as a next step in the evaluation of the regulation loop. V_{OUT} can be monitored for settling time, overshoot or ringing that helps judge the converter's stability. Without any ringing, the loop usually has more than 45° of phase margin.

Because the damping factor of the circuitry is directly related to several resistive parameters (for example, MOSFET $r_{DS(on)}$) that are temperature dependant, the loop stability analysis must be done over the input voltage range, output current range, and temperature range.

10.2.1.3 Application Curves

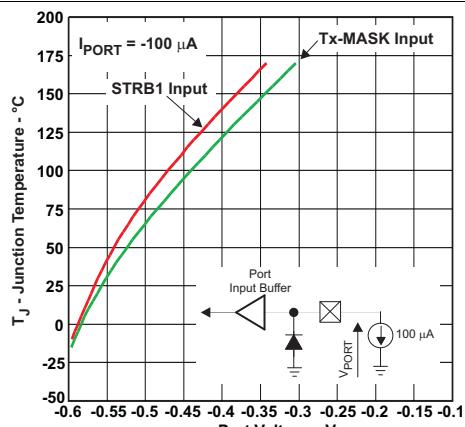


Figure 64. Junction Temperature vs Port Voltage


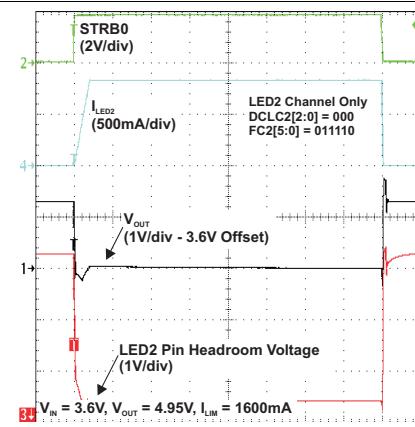
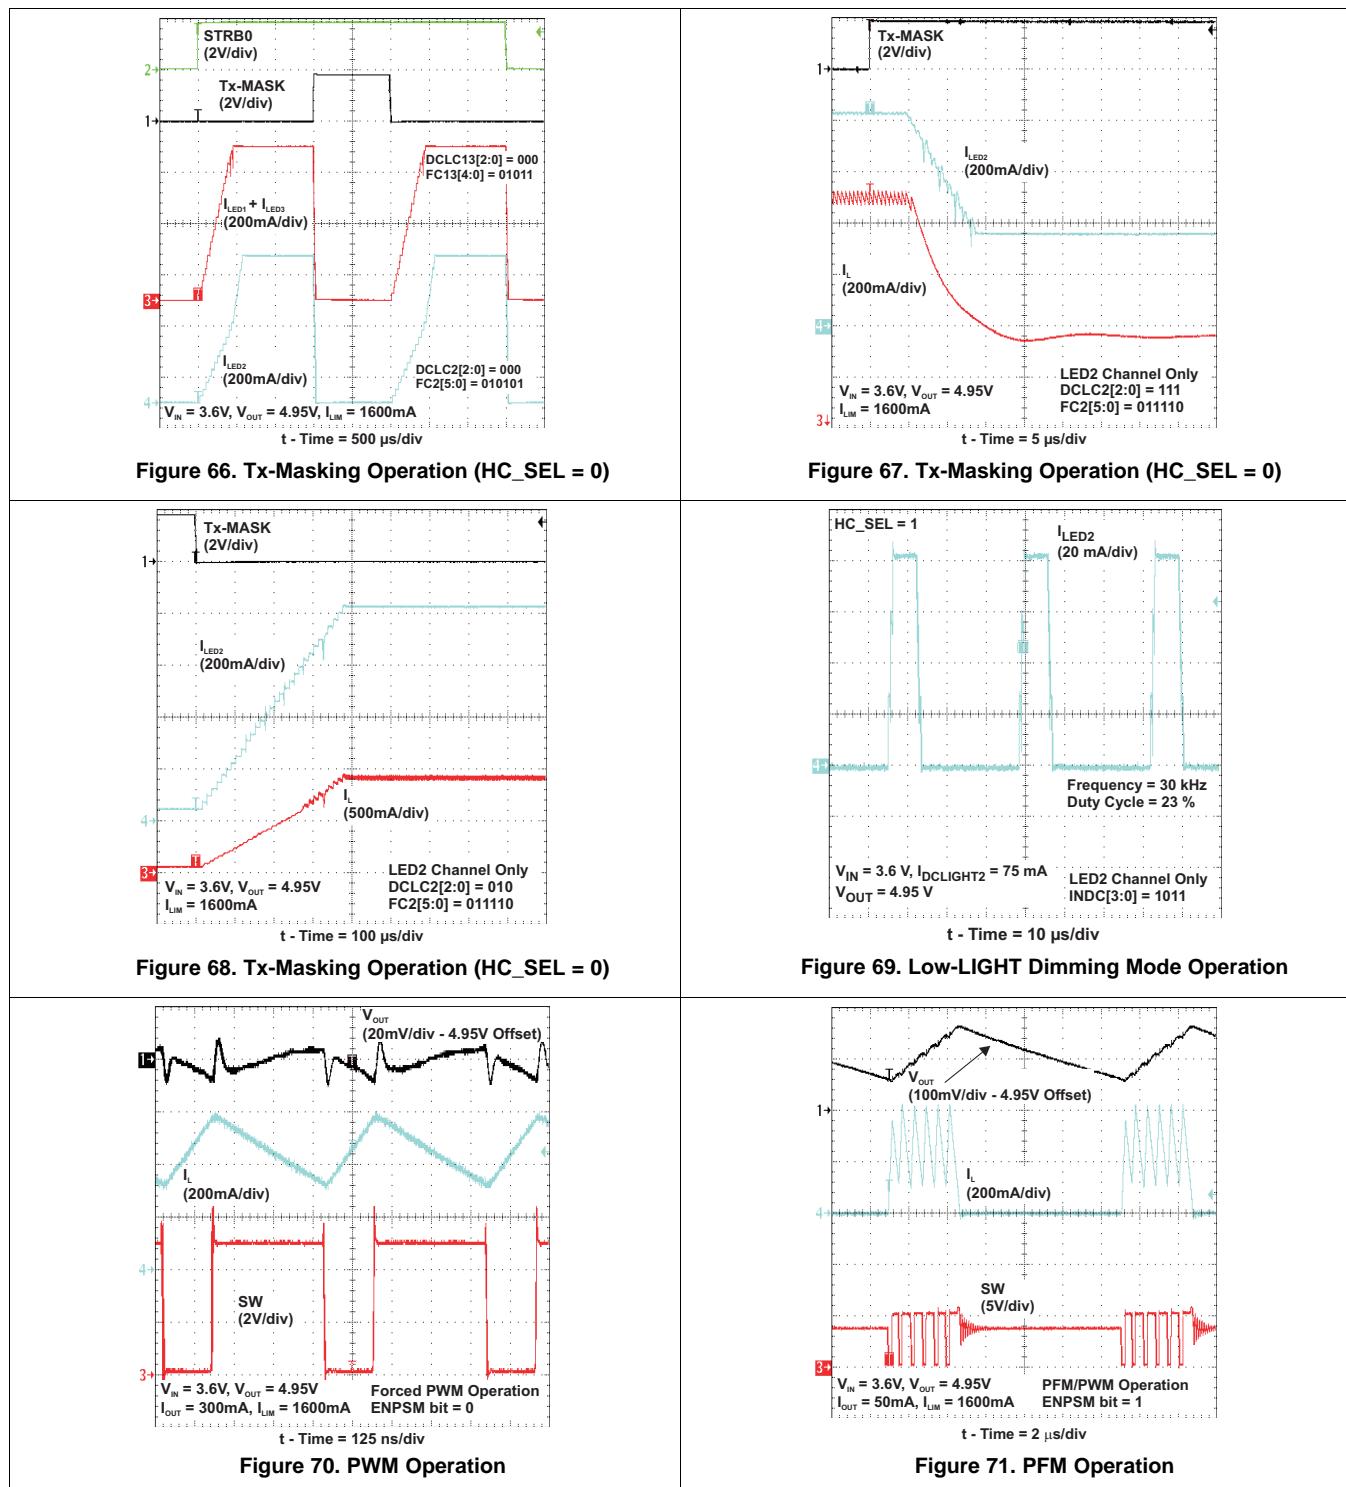
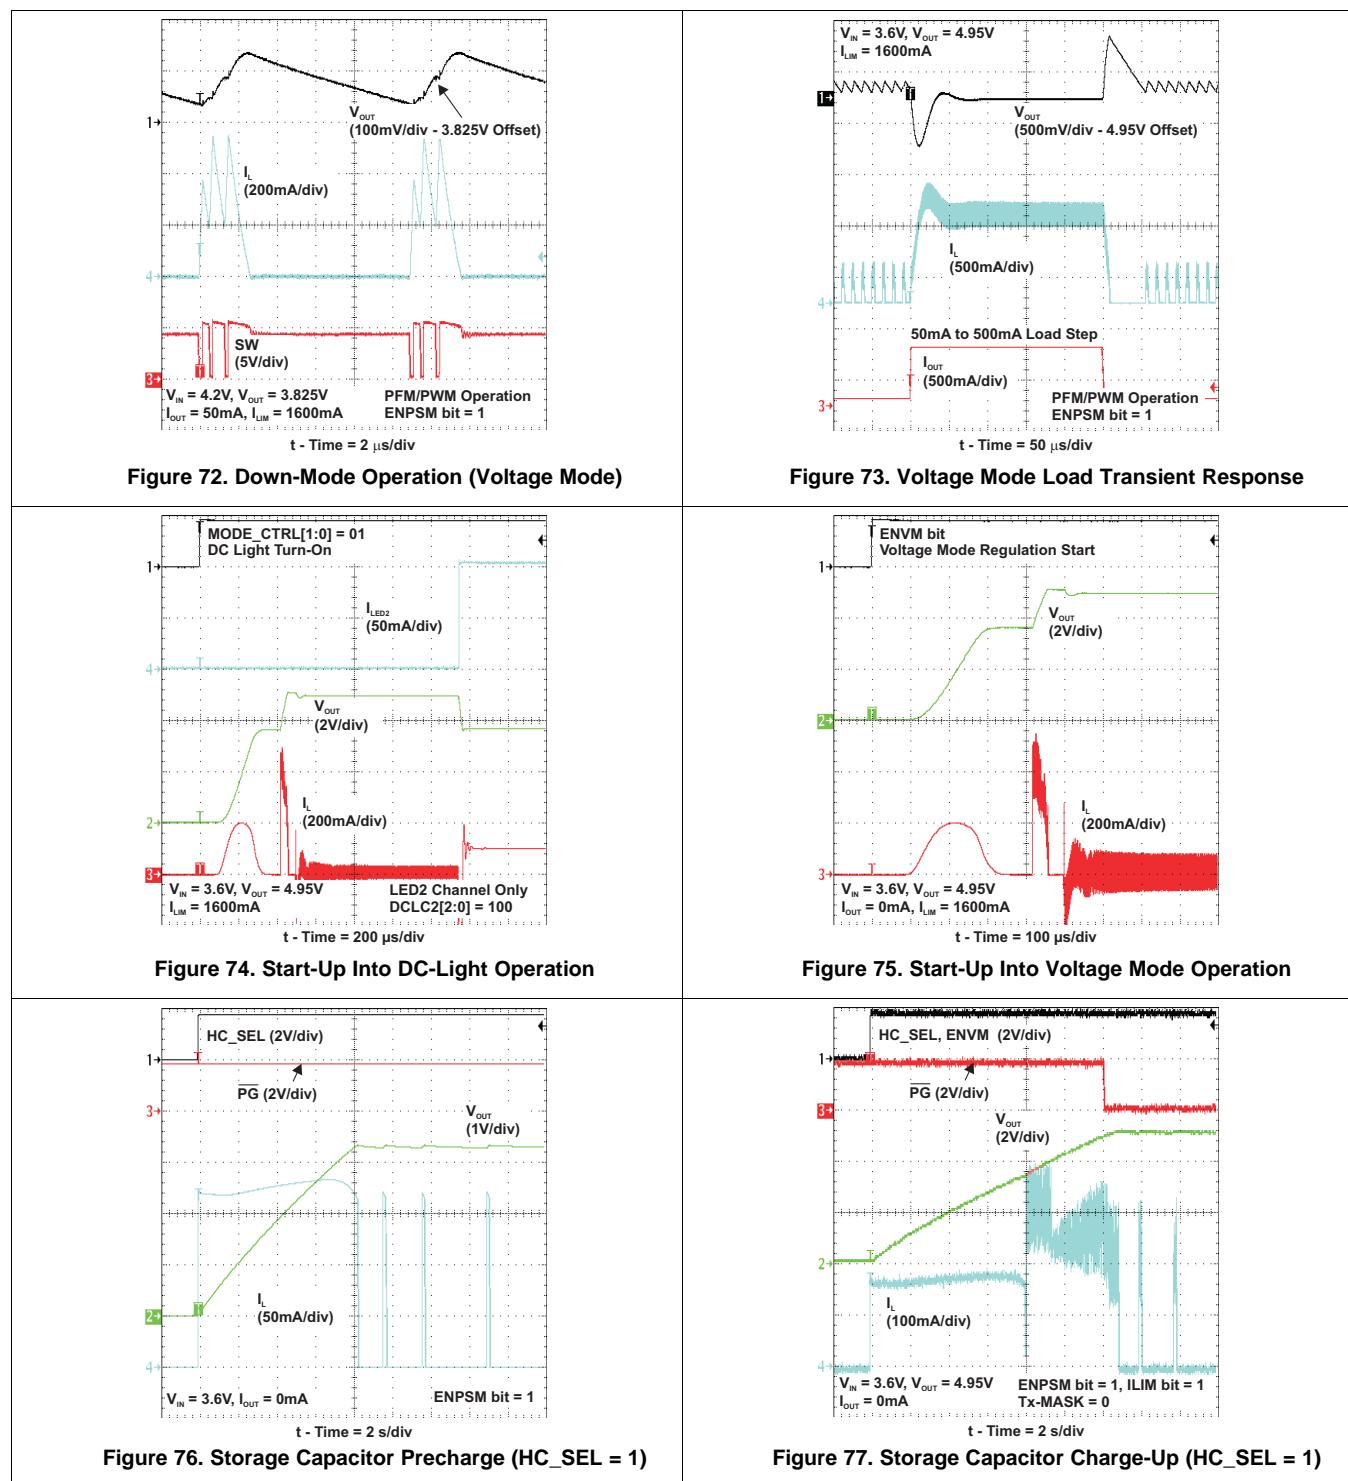
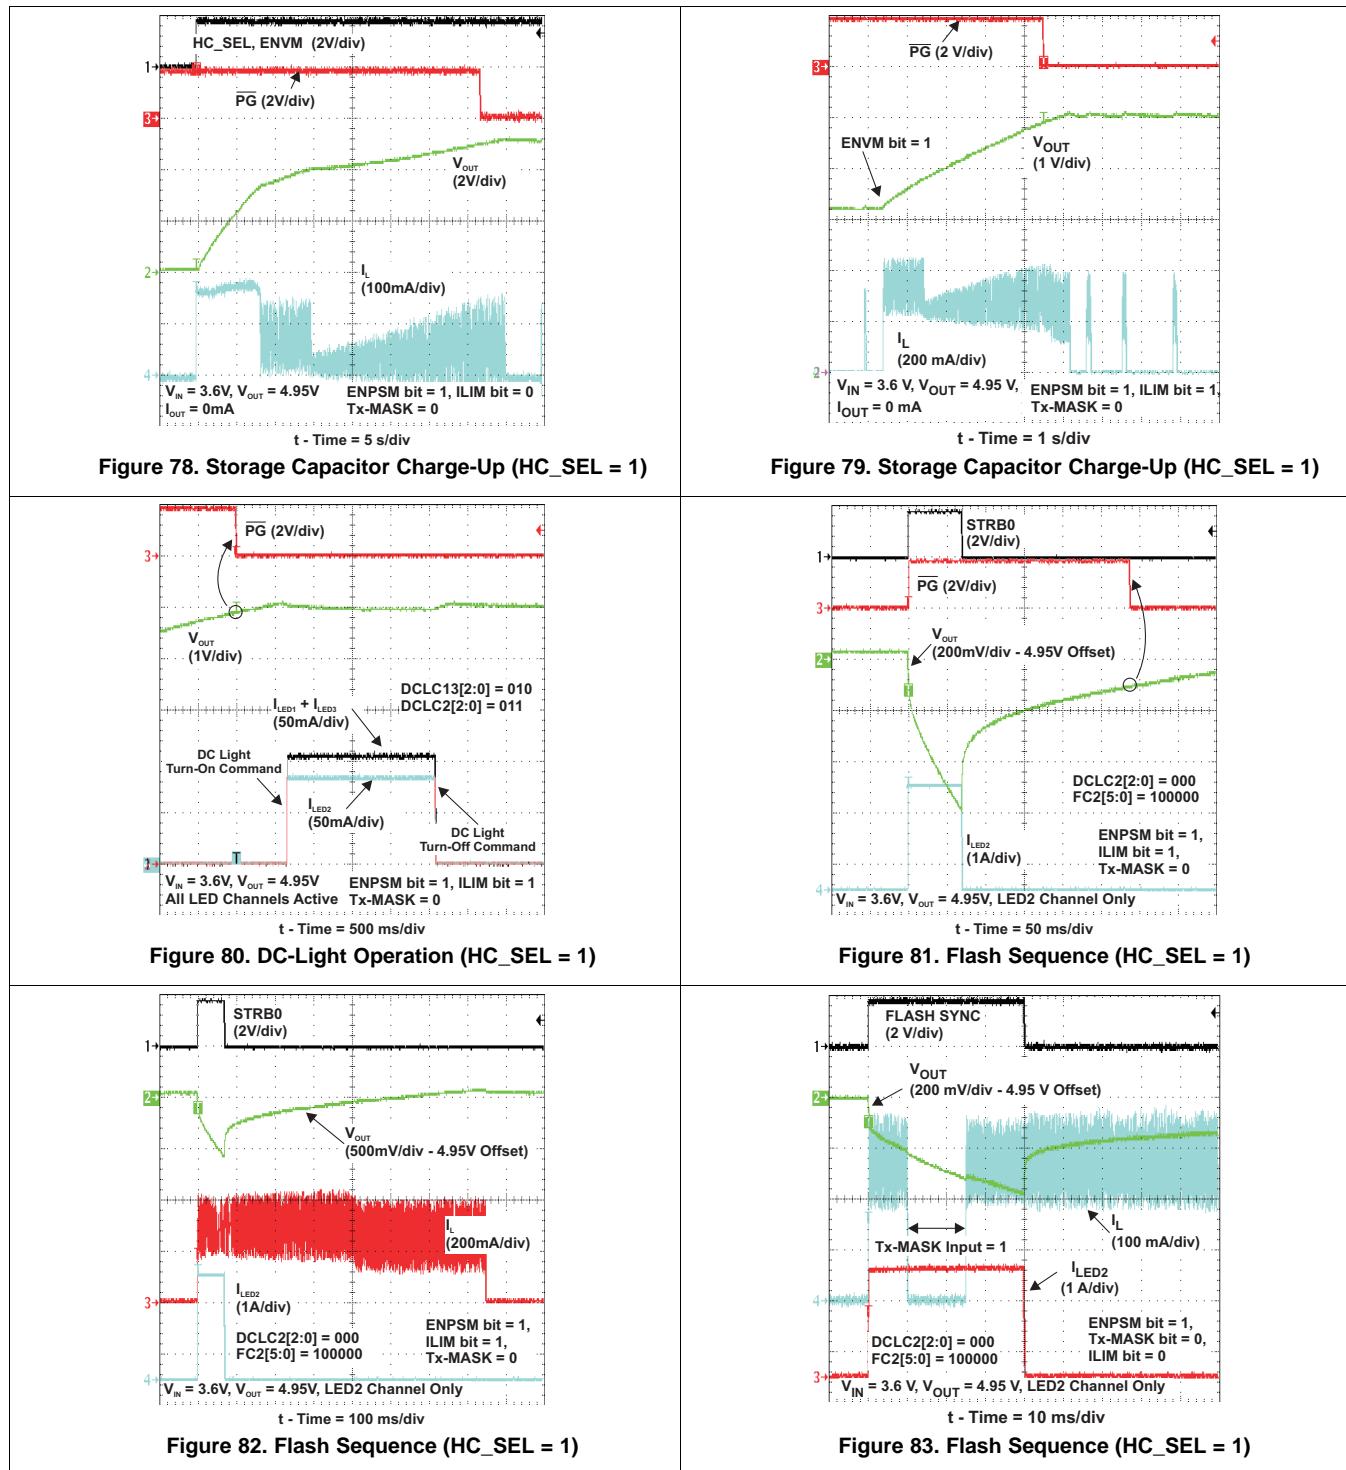
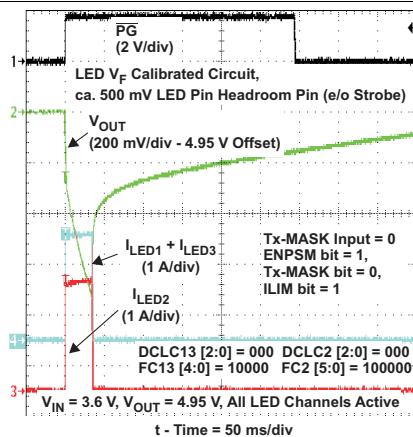
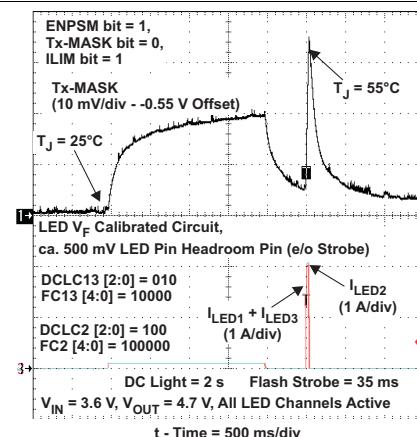


Figure 65. Flash Sequence (HC_SEL = 0)

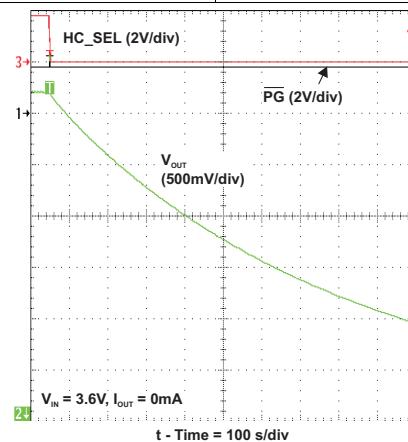

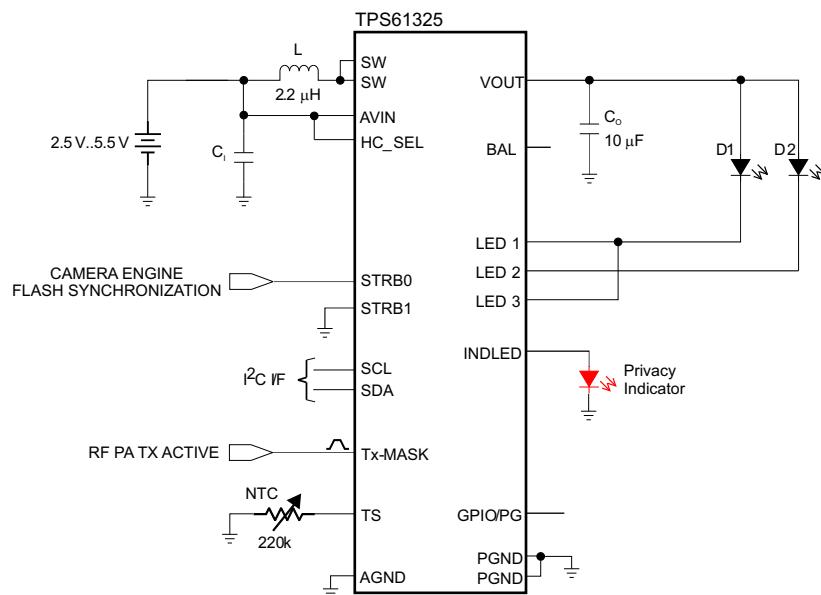





Figure 84. Flash Sequence (HC_SEL = 1)

Figure 85. Junction Temperature Monitoring (HC_SEL = 1)

Figure 86. Shutdown (HC_SEL = 1)

10.2.2 Other Application Circuit Examples


Figure 87 and Figure 88 show application circuit examples using the TPS61325 device. Customers must fully validate and test these circuits before implementing a design based on these examples.



Copyright © 2016, Texas Instruments Incorporated

Figure 87. 2x 600-mA High Power White LED Solution With Privacy Indicator Schematic

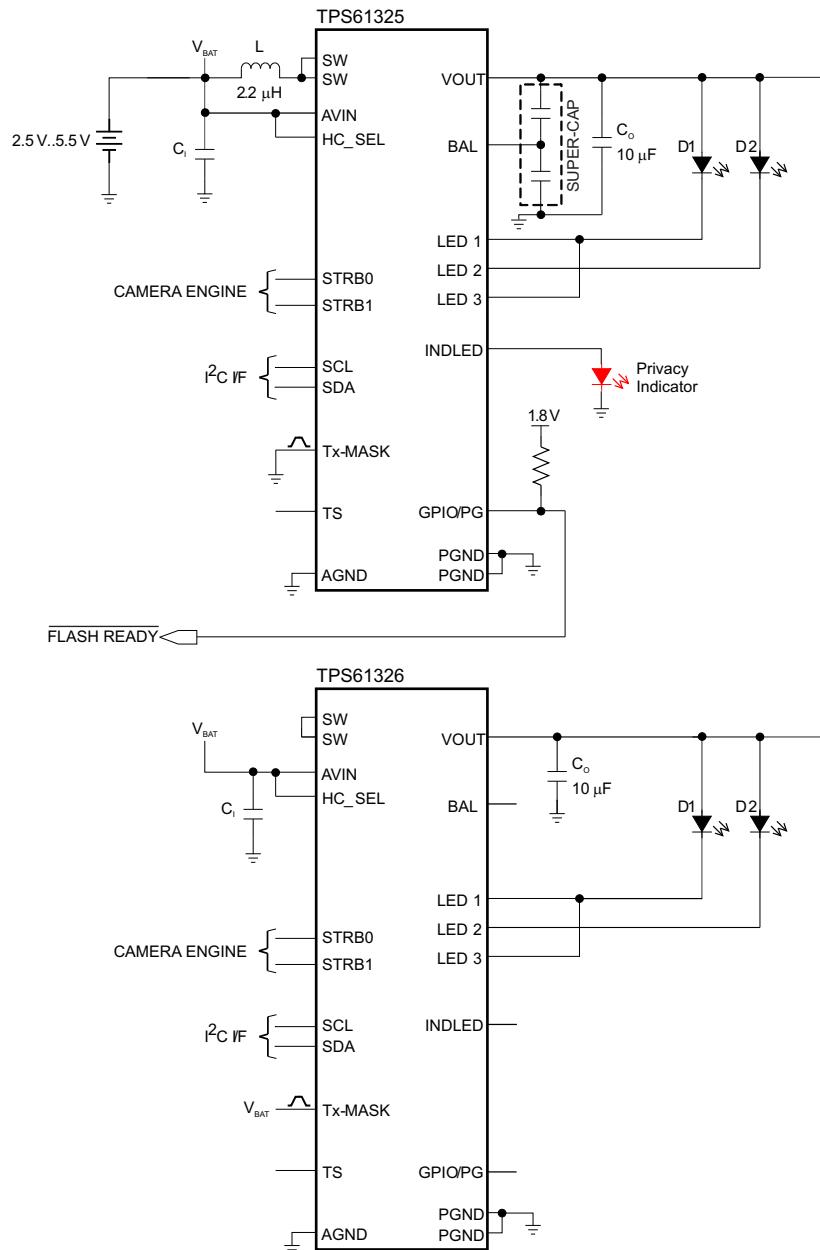In this application, TPS61325 is used to drive two 600-mA white LEDs. A storage capacitor is not necessary because the LED current can be supplied by the TPS61325 directly. The privacy indicator is turned on.



Copyright © 2016, Texas Instruments Incorporated

Figure 88. 8200-mA Four High-Power White LED Flashlight With Storage Capacitor Schematic

In this application, it is required to drive a 8200-mA, four high-power white LED, flashlight. Because it is beyond the driving capability of the TPS61325, two devices are connected in parallel to drive the LED flashlight. One works as a master with a storage capacitor, and the other works as a slave.

11 Power Supply Recommendations

The device is designed to operate from an input voltage supply range from 2.5 V to 5.5 V. This input supply must be well regulated. If the input supply is located more than a few inches from the converter, additional bulk capacitance may be required in addition to the ceramic bypass capacitors. TI recommends an electrolytic or tantalum capacitor with a value of 47 μ F in this circumstance.

12 Layout

12.1 Layout Guidelines

As for all switching power supplies, the layout is an important step in the design, especially at high peak currents and high switching frequencies. If the layout is not carefully done, the regulator could show stability problems as well as EMI problems. Therefore, use wide and short traces for the main current path and for the power ground tracks.

The input capacitor, output capacitor, and the inductor must be placed as close as possible to the IC. Use a common ground node for power ground and a different one for control ground to minimize the effects of ground noise. Connect these ground nodes at any place close to one of the ground pins of the IC.

TI recommends using short traces to lay out the control ground, separated from the power ground traces. This avoids ground shift problems, which can occur due to superimposition of power-ground current and control-ground current.

12.2 Layout Example

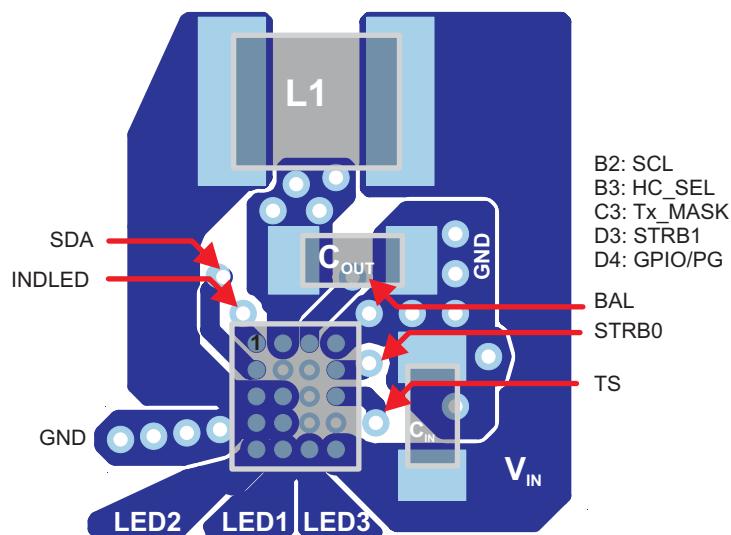


Figure 89. Suggested Layout (Top)

12.3 Thermal Considerations

Implementation of integrated circuits in low-profile and fine-pitch surface-mount packages typically requires special attention to power dissipation. Many system-dependant issues such as thermal coupling, airflow, added heat sinks and convection surfaces, and the presence of other heat-generating components affect the power-dissipation limits of a given component.

Three basic approaches for enhancing thermal performance are listed below:

- Improving the power dissipation capability of the PCB design
- Improving the thermal coupling of the component to the PCB
- Introducing airflow in the system

Junction-to-ambient thermal resistance is highly application and board-layout dependent. In applications where high maximum power dissipation exists, pay special attention to thermal dissipation issues in board design. The maximum junction temperature (T_J) of the TPS6132x is 150°C.

The maximum power dissipation is especially critical when the device operates in the linear down mode at high LED current. For single pulse power thermal analysis, for example, flashlight strobe, the allowable power dissipation for the device is given by [Figure 90](#). These values are derived using the reference design.

Thermal Considerations (continued)

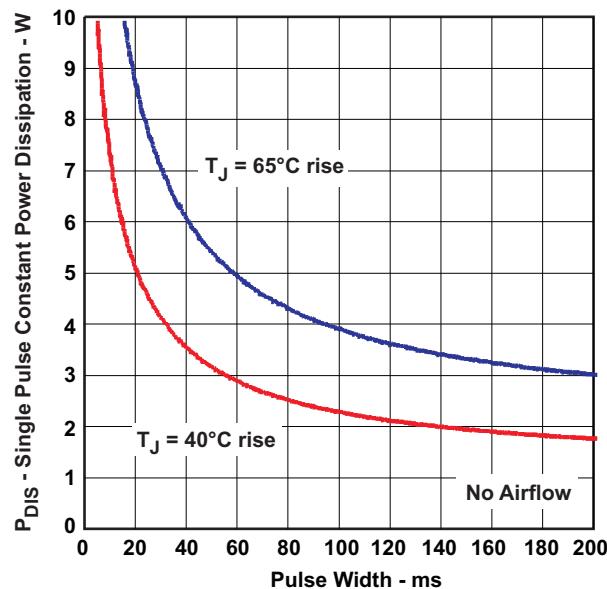


Figure 90. Single Pulse Power Capability

13 Device and Documentation Support

13.1 Device Support

13.1.1 Third-Party Products Disclaimer

TI'S PUBLICATION OF INFORMATION REGARDING THIRD-PARTY PRODUCTS OR SERVICES DOES NOT CONSTITUTE AN ENDORSEMENT REGARDING THE SUITABILITY OF SUCH PRODUCTS OR SERVICES OR A WARRANTY, REPRESENTATION OR ENDORSEMENT OF SUCH PRODUCTS OR SERVICES, EITHER ALONE OR IN COMBINATION WITH ANY TI PRODUCT OR SERVICE.

13.2 Documentation Support

13.2.1 Related Documentation

For related documentation, see the following:

UM10204, I²C-Bus Specification and User Manual; (Rev. 6, April 2014),

http://www.nxp.com/documents/user_manual/UM10204.pdf

13.3 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. In the upper right corner, click on *Alert me* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

13.4 Community Resources

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

TI E2E™ Online Community *TI's Engineer-to-Engineer (E2E) Community*. Created to foster collaboration among engineers. At e2e.ti.com, you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

Design Support *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

13.5 Trademarks

NanoFree, E2E are trademarks of Texas Instruments.

All other trademarks are the property of their respective owners.

13.6 Electrostatic Discharge Caution



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

13.7 Glossary

[SLYZ022](#) — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

14 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

PACKAGING INFORMATION

| Orderable Device | Status (1) | Package Type | Package Drawing | Pins | Package Qty | Eco Plan (2) | Lead/Ball Finish (6) | MSL Peak Temp (3) | Op Temp (°C) | Device Marking (4/5) | Samples |
|------------------|---------------|--------------|-----------------|------|-------------|-------------------------|-------------------------|----------------------|--------------|-------------------------|----------------|
| TPS61325YFFR | ACTIVE | DSBGA | YFF | 20 | 3000 | Green (RoHS & no Sb/Br) | SNAGCU | Level-1-260C-UNLIM | -40 to 85 | TPS61325 | Samples |
| TPS61325YFFT | ACTIVE | DSBGA | YFF | 20 | 250 | Green (RoHS & no Sb/Br) | SNAGCU | Level-1-260C-UNLIM | -40 to 85 | TPS61325 | Samples |

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

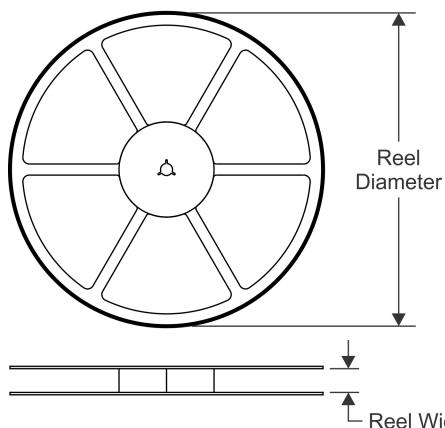
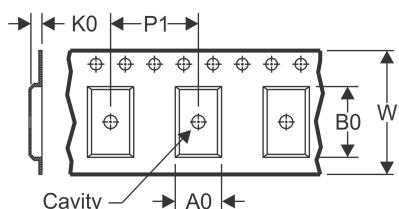


www.ti.com


PACKAGE OPTION ADDENDUM

20-Jan-2016

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.


TAPE AND REEL INFORMATION
REEL DIMENSIONS

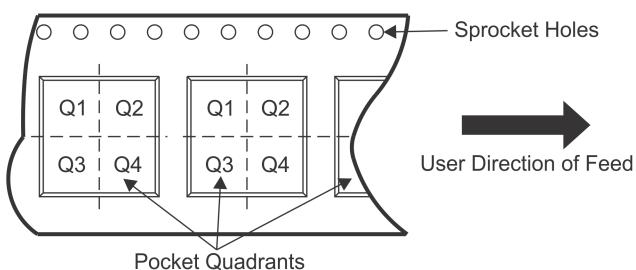TAPE DIMENSIONS


| | |
|----|---|
| A0 | Dimension designed to accommodate the component width |
| B0 | Dimension designed to accommodate the component length |
| K0 | Dimension designed to accommodate the component thickness |
| W | Overall width of the carrier tape |
| P1 | Pitch between successive cavity centers |

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

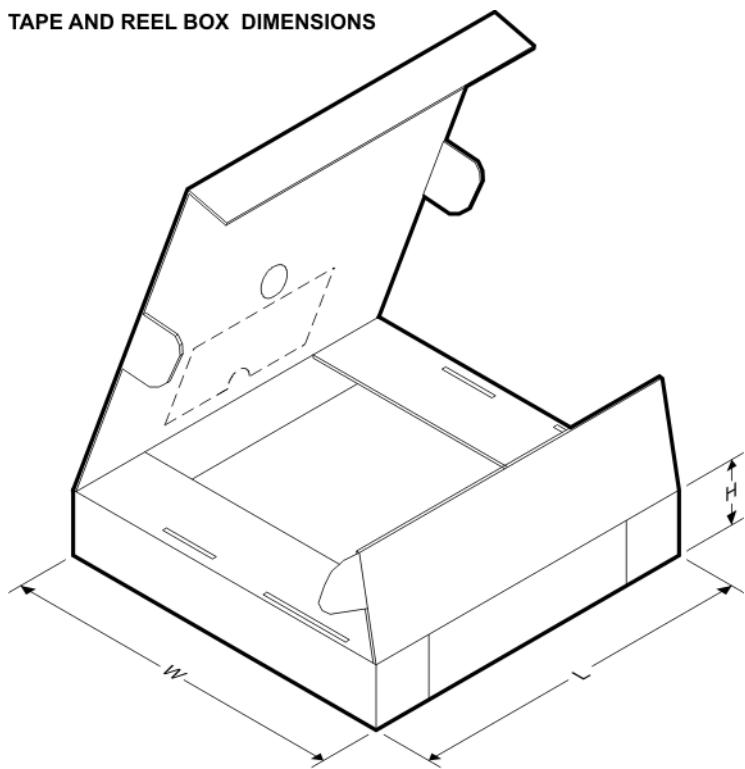
*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|--------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TPS61325YFFR | DSBGA | YFF | 20 | 3000 | 180.0 | 8.4 | 2.2 | 2.35 | 0.8 | 4.0 | 8.0 | Q1 |
| TPS61325YFFT | DSBGA | YFF | 20 | 250 | 180.0 | 8.4 | 2.2 | 2.35 | 0.8 | 4.0 | 8.0 | Q1 |


TAPE AND REEL BOX DIMENSIONS

*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) |
|--------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TPS61325YFFR | DSBGA | YFF | 20 | 3000 | 182.0 | 182.0 | 20.0 |
| TPS61325YFFT | DSBGA | YFF | 20 | 250 | 182.0 | 182.0 | 20.0 |

YFF (R-XBGA-N20)

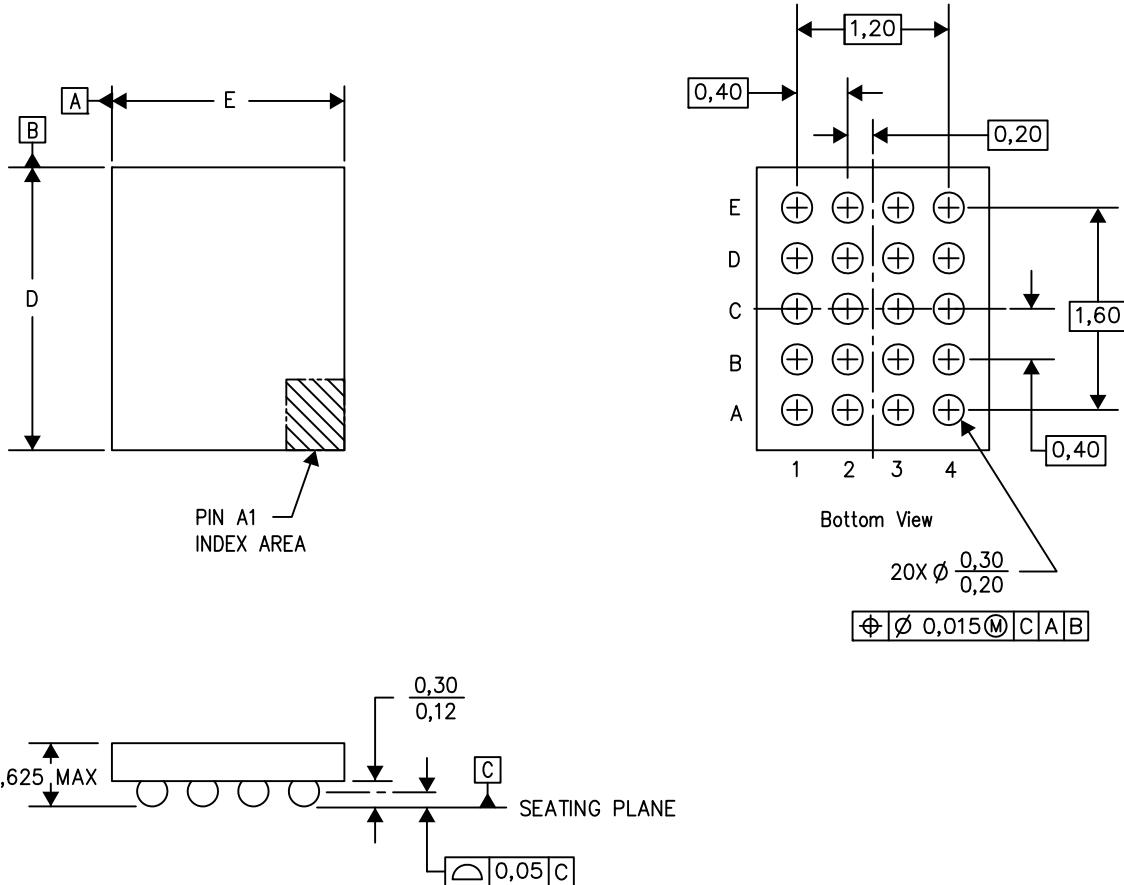DIE-SIZE BALL GRID ARRAY



D: Max = 2.2 mm, Min = 2.14 mm

E: Max = 1.958 mm, Min = 1.898 mm

4207625-9/A0 12/13

NOTES:

- All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
- This drawing is subject to change without notice.
- NanoFree™ package configuration.

NanoFree is a trademark of Texas Instruments.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale (www.ti.com/legal/termsofsale.html) or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2019, Texas Instruments Incorporated