

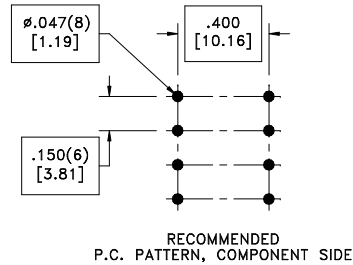


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect



PART MUST INSERT FULLY TO
SURFACE A IN RECOMMENDED GRID

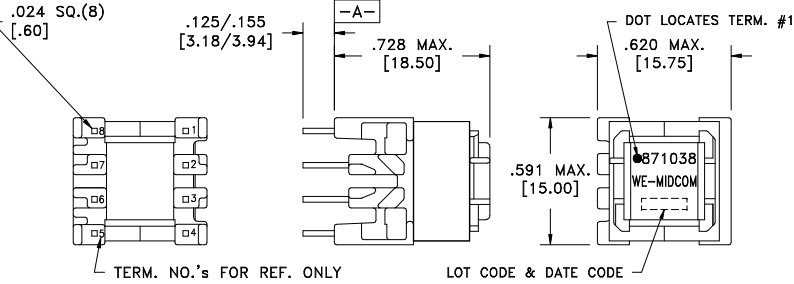

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-4 @20°C	0.65 ohms max.
D.C. RESISTANCE	2-3 @20°C	4.60 ohms max.
D.C. RESISTANCE	6-7 @20°C	0.110 ohms max.
INDUCTANCE	2-3 10kHz, 100mVAC, Ls	1.85mH $\pm 10\%$
SATURATION CURRENT	20% rolloff from initial	280mA
LEAKAGE INDUCTANCE	2-3 tie(1+4, 6+7), 100kHz, 100mVAC, Ls	10.0uH typ., 20.0uH max.
DIELECTRIC	2-7 tie(1+3), 4500VAC, 1 second	3600VAC, 1 minute
URNS RATIO	(2-3):(7-6)	5.76:1, $\pm 1\%$
URNS RATIO	(2-3):(1-4)	4.9:1, $\pm 1\%$

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Designed to comply with the following requirements as defined by IEC60950-1, EN60950-1, UL60950-1/CSA60950-1 and AS/NZS60950.1:

- Reinforced insulation for a primary circuit at a working voltage of 400VDC.

Ⓟ Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications	CONVENTION PLACEMENT	Tolerances unless otherwise specified:	DRAWING TITLE	PART NO.
		Method: Tray PKG-0732 www.we-online.com/midcom		Angles: $\pm 1^\circ$ Fractions: $\pm 1/64$	TRANSFORMER	760871038
6B	12/10	SEE REVISION SHEET FOR	REVISION LEVEL	This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: 760871038	SPECIFICATION SHEET 1 OF 1
6A	2/10					



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Wurth Electronics:](#)

[760871038](#)