





RED INDICATES ORIGINAL

DATA CONTAINED IN THIS DOCUMENT IS
PROPRIETARY TO TROMPETER ELECTRONICS INC.
AND SHALL NOT BE DISCLOSED, COPIED OR USED
FOR PROCUREMENT OR MANUFACTURE WITHOUT
EXPRESS WRITTEN PERMISSION

REVISIONS

I-0526 SH 1

REV	ECO NO.	DESCRIPTION	DWN	APROVED	DATE
A		PRODUCTION RELEASE	AAH		

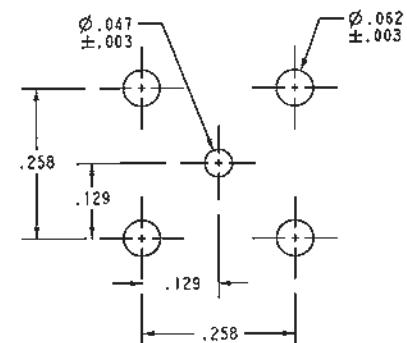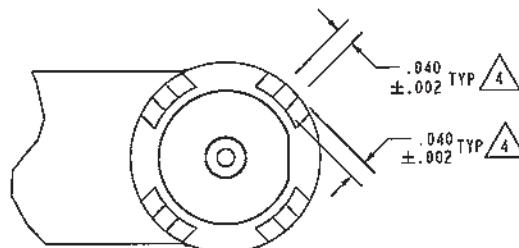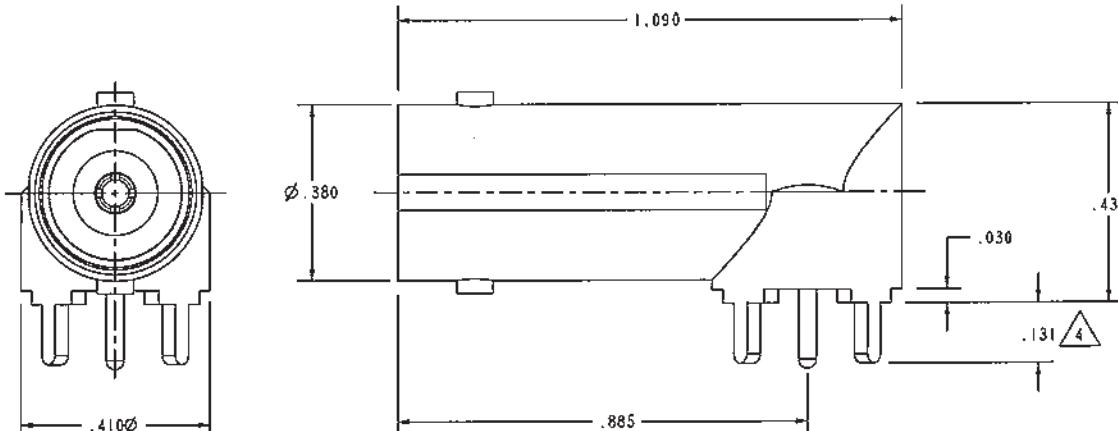

RECOMMENDED HLTG
HOLE PATTERN

4 DIMENSIONS INDICATED ARE BEFORE TINNING OF BODY LEGS
WITH .0015 MAX THK. SN63 PER QQ-S-571 OR EQUIV
TO WITHIN .060 OF SHOULDER

3. FINISH: TFS-1A (NICKEL)
2. 50 Ω CIRCUIT BOARD MOUNTED RIGHT ANGLE BNC RECEPTACLE
1. ALL DIM ARE IN INCHES

QTY	DESCRIPTION		PART NUMBER		ITEM
TOL UNLESS SPECIFIED		TROMPETER RF connectivity a Lumentek company brand		CBJR220	
.XX	± .005				
.XXX	± .005				
XXXX	± .005				
ANGLE	±				
DWN	AAH	12-5-94	MATERIAL	CODE IDENT	DRAWING NO.
CHK	Bm	12-13-94		14949	I-0526
ENGR			REV		A
NEXT ASSY	APPR	12/13/94	SCALE	4/1	DATE 12/13/94
					SHEET 1 OF 2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions:](#)

[CBJR220](#)