

Interface module - VIP-3/SC/HD26SUB/F - 2322414

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VARIOFACE module, with screw connection and high density D-SUB miniature socket strip, for mounting on NS 35 rails, no. of pos.: 26, width: 79 mm

The figure shows a 44-pos. version, with pin strip

Product Features

- Screw connection
- 1:1 connection



Key Commercial Data

| | |
|--------------------------------------|---------------|
| Packing unit | 1 pc |
| Weight per Piece (excluding packing) | 140.0 g |
| Custom tariff number | 85369010 |
| Country of origin | United States |

Technical data

Dimensions

| | |
|--------|---------|
| Width | 52.3 mm |
| Height | 69 mm |
| Depth | 62 mm |

Ambient conditions

| | |
|---|------------------|
| Ambient temperature (operation) | -20 °C ... 50 °C |
| Ambient temperature (storage/transport) | -20 °C ... 70 °C |

General

| | |
|---------------------------------|-------------|
| Max. perm. operating voltage | 125 V AC/DC |
| Max. perm. current (per branch) | 1 A |

Interface module - VIP-3/SC/HD26SUB/F - 2322414

Technical data

General

| | |
|-----------------------|----------|
| Number of positions | 26 |
| Status display | No |
| Mounting position | any |
| Standards/regulations | EN 50178 |

Connection data for connection 1

| | |
|----------------------------------|---|
| Connection name | Field level |
| Connection in acc. with standard | IEC / EN |
| Connection method | Screw connection |
| Stripping length | 8 mm |
| Screw thread | M3 |
| Conductor cross section solid | 0.2 mm ² ... 4 mm ² |
| Conductor cross section flexible | 0.2 mm ² ... 2.5 mm ² |
| Conductor cross section AWG | 24 ... 12 |
| Number of positions | 26 |

Connection data for connection 2

| | |
|-----------------------|---------------------------------|
| Connection name | Controller level |
| Connection method | High-density D-SUB socket strip |
| Number of connections | 1 |
| Number of positions | 26 |

Standards and Regulations

| | |
|----------------------------------|----------|
| Connection in acc. with standard | CUL |
| Standards/regulations | EN 50178 |

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27250313 |
| eCl@ss 4.1 | 27250313 |
| eCl@ss 5.0 | 27250313 |
| eCl@ss 5.1 | 27250313 |
| eCl@ss 6.0 | 27242608 |
| eCl@ss 7.0 | 27141152 |
| eCl@ss 8.0 | 27141152 |
| eCl@ss 9.0 | 27141152 |

Interface module - VIP-3/SC/HD26SUB/F - 2322414

Classifications

ETIM

| | |
|----------|----------|
| ETIM 2.0 | EC001434 |
| ETIM 3.0 | EC001604 |
| ETIM 4.0 | EC001604 |
| ETIM 5.0 | EC002780 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 30211824 |
| UNSPSC 7.0901 | 39121421 |
| UNSPSC 11 | 39121421 |
| UNSPSC 12.01 | 39121421 |
| UNSPSC 13.2 | 39121421 |

Approvals

Approvals


Approvals

cUL Recognized / UL Recognized / EAC / EAC / cULus Recognized

Ex Approvals

Approvals submitted

Approval details

| | |
|--|-------|
| cUL Recognized  | |
| mm ² /AWG/kcmil | 30-12 |
| Nominal current I _N | 1 A |
| Nominal voltage U _N | 125 V |

Interface module - VIP-3/SC/HD26SUB/F - 2322414

Approvals

| | |
|--------------------------------|-------|
| UL Recognized | |
| mm ² /AWG/kcmil | 30-12 |
| Nominal current I _N | 1 A |
| Nominal voltage U _N | 125 V |


EAC

EAC


cULus Recognized

Drawings

Dimensional drawing

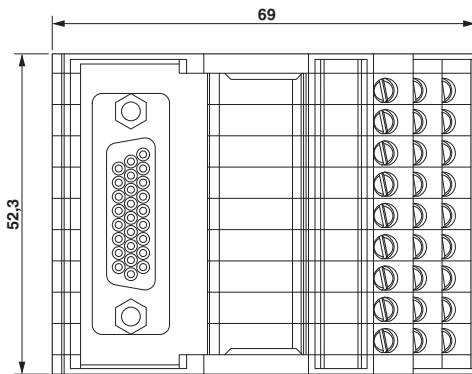

Circuit diagram

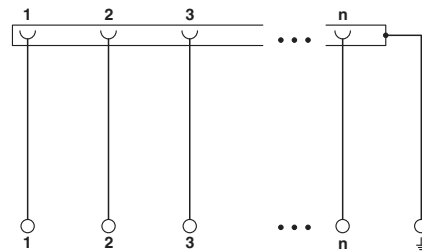

Universal circuit diagram

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[2322414](#)