



DESCRIPTION: 2MM SHUNT LOW PROFILE, .075" 15 MICROINCH GOLD

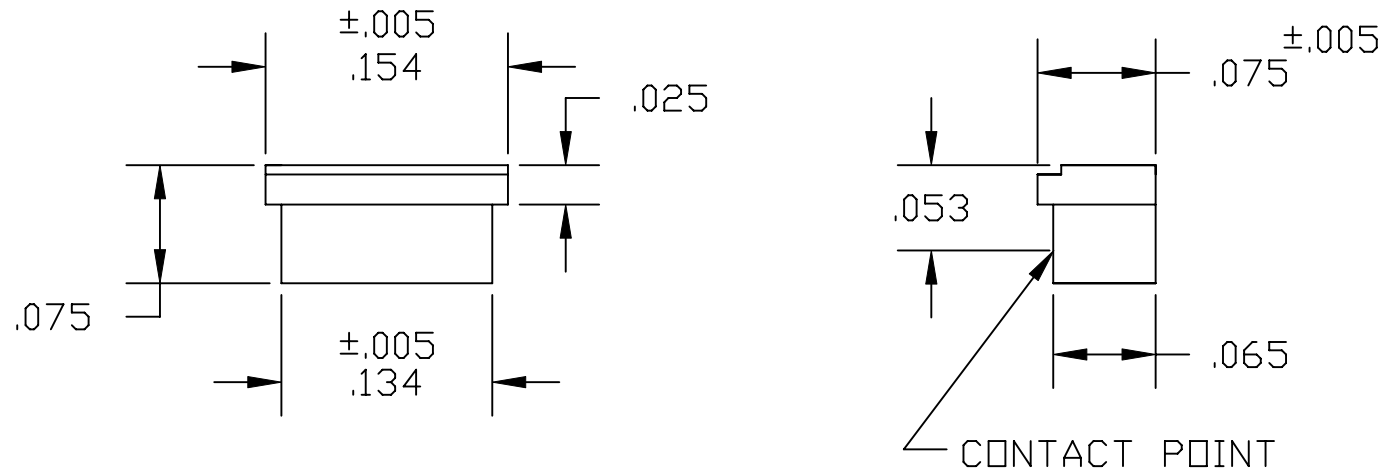

MATERIAL: HOUSING: HIGH TEMP. (PA-6T) 260° PROCESS TEMP.  
 CONTACT: BERYLLIUM COPPER  
PLATING: 15 MICRO-INCHES PALLADIUM/NICKEL WITH GOLD FLASH OVERALL  
ELECTRICALS: CURRENT RATING: 1.0 AMPERE MAX.  
 CONTACT RESISTANCE: 20 MILLIOHM MAX.  
 DIELECTRIC WITHSTANDING: 250 VAC @SEA LEVEL  
 INSULATION RESISTANCE: 10,000 MOHMS MIN.  
 OPERATING TEMP: -55°C TO 105°C

RoHS COMPLIANT

|  |   |                         |                       |                   |
|--|---|-------------------------|-----------------------|-------------------|
|  | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. |                         | DRAWN:<br>PAM JENKINS | DATE:<br>12-12-06 |
|  |   |                         | CHECKED:              | DATE:             |
| <h1>NorComp</h1>   |   | SCALE:                  | SHEET 1 OF 1          | REV 1             |
|  |   | DWG NO. 810-002-LP1R001 |                       |                   |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NorComp:](#)

[810-002-LP1R001](#)