


Material	High Conductivity Seamless Copper Tube
Plating	Electro-Tin
Wire Size	1 STR/FLEX
Wire Type	Stranded Copper: Class B & C Compact, Class G, H, I, K, M, Locomotive
Wire Strip Length	1-1/2 in.
Stud Size	1/4 in.
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.
UL Temperature Rating	90° C
C.S.A Certified Wire Connector	Yes
Panduit Color Code on Barrel	GREEN
Panduit Die Index No. on Barrel	P37
Alternate Industry Die Index No. () on Barrel	(11)



Technical drawing of a Panduit 1 STR/FLEX LC CX1-14AF connector. The drawing shows a side view of the connector with dimensions and labels. The top dimension is $.76 \pm .04$. The bottom dimension is $.32 \pm .04$. The length of the connector is $.63 \pm .02$. The diameter of the connector is $.27 \pm .02$ DIA. The label on the connector reads "PANDUIT", "1 STR/FLEX", and "LC CX1-14AF". A "Wire inspection window" is indicated on the right side. The drawing is labeled "(2) PLS".

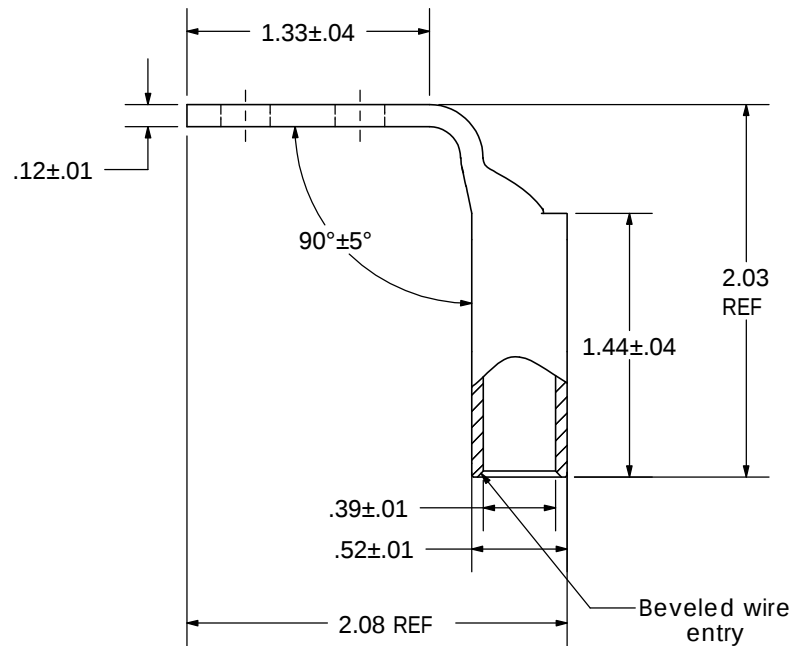

00	6/03	SAC	SAC	RELEASED	10850
----	------	-----	-----	----------	-------

REV	DATE	BY	CHK	DESCRIPTION	ECN
-----	------	----	-----	-------------	-----

SCALE	N/A
-------	-----

DRAWING NO / CAD FILE

LCCX1-14AF-CUST

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[LCCX1-14AF-X](#)