


REV D	DTT-16-00	REVISIONS			
		SYM	DESCRIPTION	DATE	APPROVED
		A	REVISED PER E.O. PI8768	12-14-04	R.D.R.
		B	REVISED PER E.O. PI9405	11-20-06	R.D.R.
		C	REVISED PER E.O. PI9503	4-3-07	R.D.R.
		D	REVISED PER E.O. P20709	12-23-10	ADR

**DTT-16-00 CAVITY A & B CRIMP DATA:**

		2		3				2		3	
CONT	PART NUMBER	INSUL. DIA	CAVITY	WIRE SIZE	CONT	PART NUMBER	INSUL. DIA	CAVITY	WIRE SIZE		
	1060-16-01** PIN	.075-.140	B	1.5 mm <sup>2</sup>		1060-16-09** PIN	.075-.140	B	1.5 mm <sup>2</sup>		
	1062-16-01** SOC	[1.91-3.56]	A	16 AWG		1062-16-09** SOC	[1.91-3.56]	A	16 AWG		
			A	1.0 mm <sup>2</sup>				A	1.0 mm <sup>2</sup>		
	1060-14-01** PIN	.095-.150	B	14 AWG		1060-14-10** PIN	.095-.150	B	14 AWG		
	1062-14-01** SOC	[2.41-3.81]	B	2.0 mm <sup>2</sup>		1062-14-10** SOC	[2.41-3.81]	B	2.0 mm <sup>2</sup>		
			B	1.5 mm <sup>2</sup>				B	1.5 mm <sup>2</sup>		
			A	1.5 mm <sup>2</sup>				A	1.5 mm <sup>2</sup>		
			A	16 AWG				A	16 AWG		
			A	1.0 mm <sup>2</sup>				A	1.0 mm <sup>2</sup>		
	1060-16-06** PIN	.055-.100	A	16 AWG							
	1062-16-06** SOC	[1.40-2.54]	A	1.0 mm <sup>2</sup>							
	1060-16-07** PIN	.075-.140	B	2.0 mm <sup>2</sup>							
	1062-16-07** SOC	[1.91-3.56]	B	1.5 mm <sup>2</sup>							
			A	16 AWG							
			A	1.0 mm <sup>2</sup>							

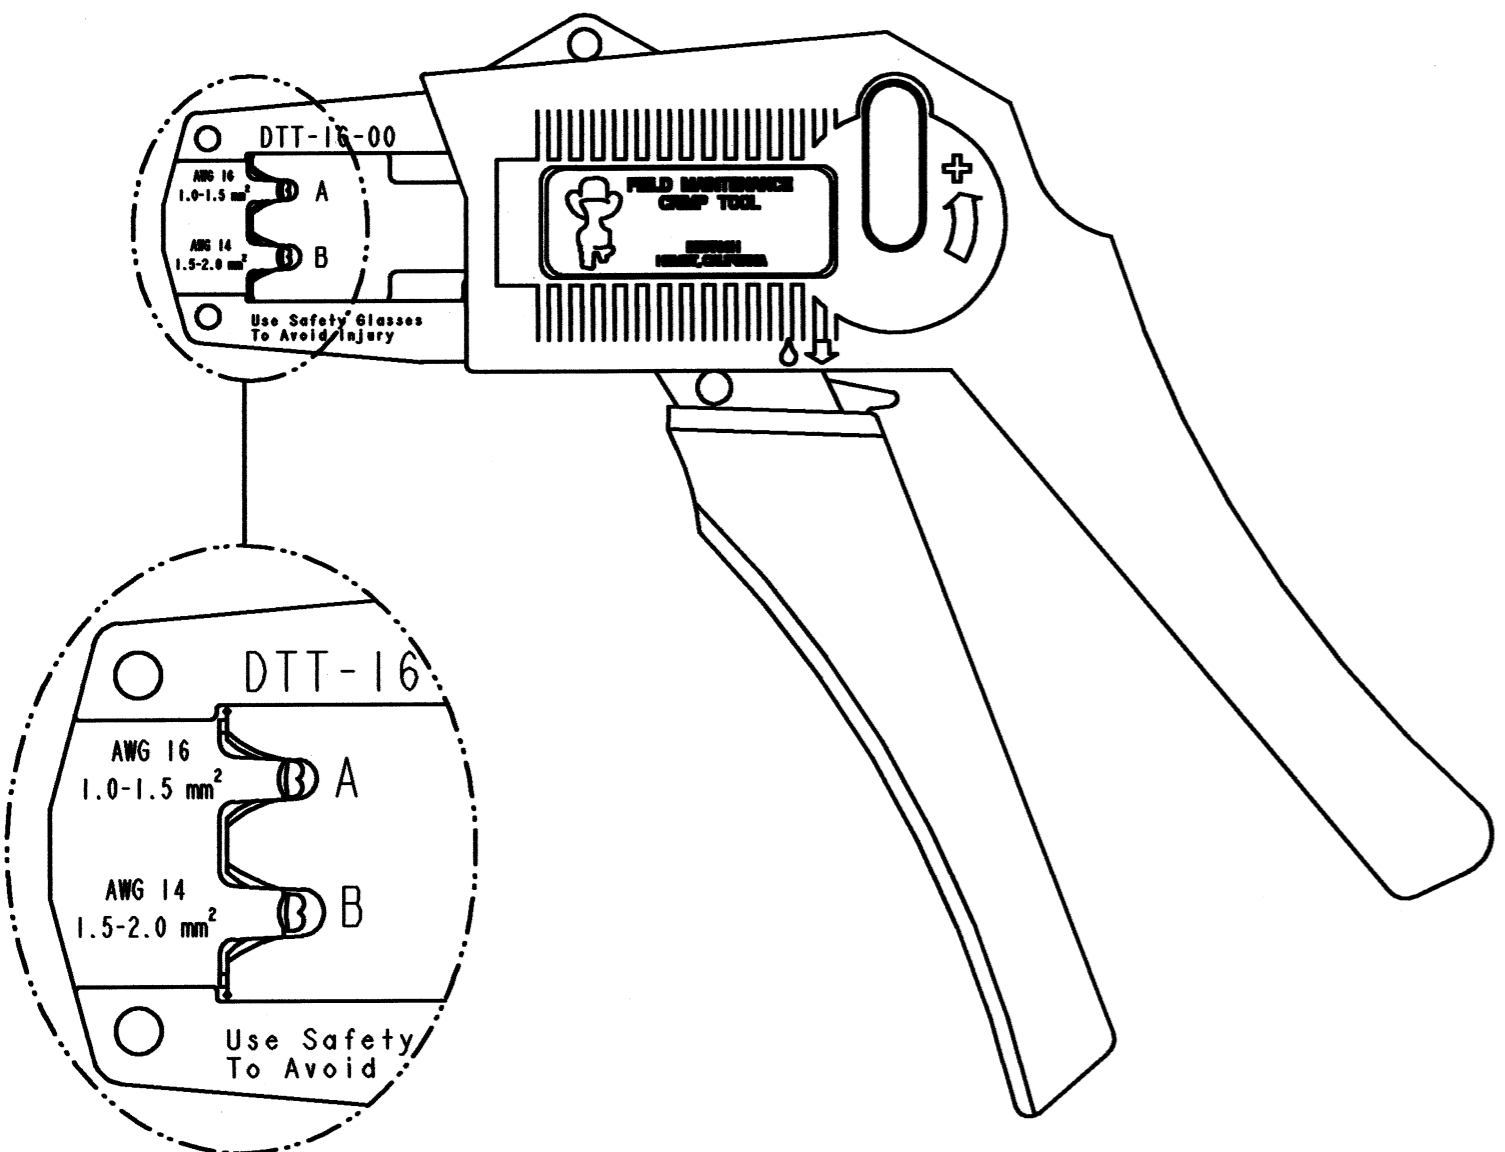

4. EACH TOOL INCLUDES AN INSTRUCTION MANUAL P/N 0425-037-0000.

3 THIS TOOL IS DESIGNED TO CRIMP SIZE 16 STAMPED CONTACTS TO WIRES INDICATED.

2 FOR \*\* PLATING CODES, SEE INDIVIDUAL ENVELOPE DRAWINGS.

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].

NOTES: UNLESS OTHERWISE SPECIFIED.

SIGNATURE & DATE		<b>FIELD MAINTENANCE CRIMP TOOL SIZE 16 STAMPED CONTACT</b>	EP	NATL. CODE	
DR	J. APOSTOL 19SEP2000		3850 INDUSTRIAL AVE. HEMET, CA 92545		
CHK	<i>[Signature]</i> 12/2/10		<b>DEUTSCH INDUSTRIAL</b>		
PE	B. Byford 12/6/2010		<b>B</b>	<b>DTT-16-00</b>	
APPD	<i>[Signature]</i> 12-20-10			DWG SIZE	CODE 11139
SCALE	NONE	WT	ENVELOPE		

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[DTT-16-00](#)