


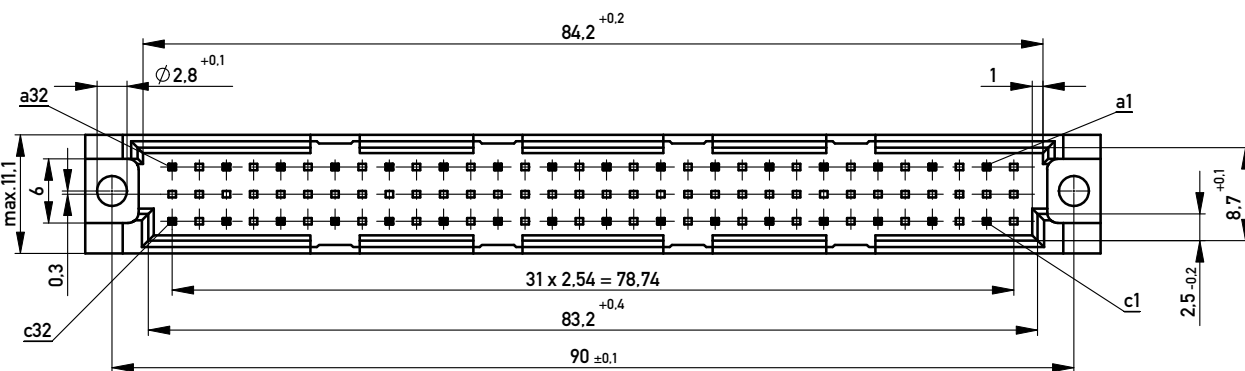
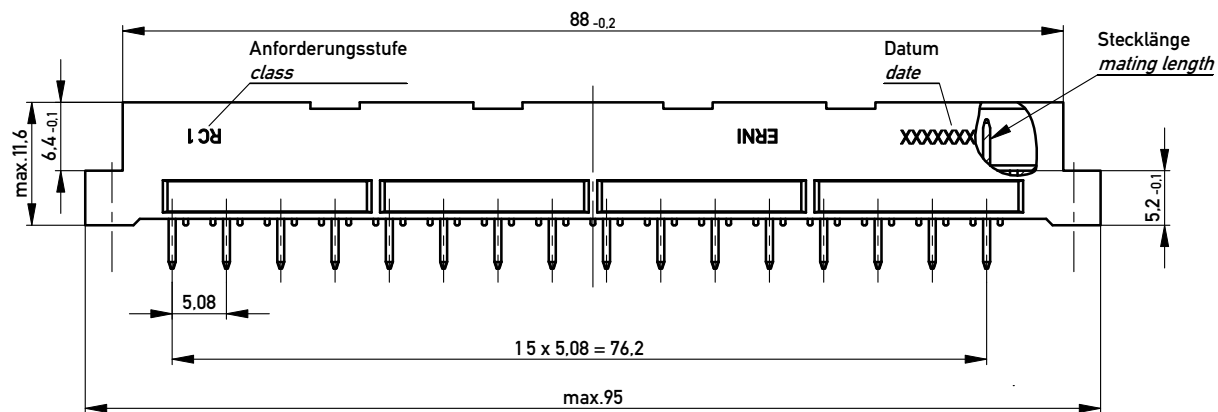


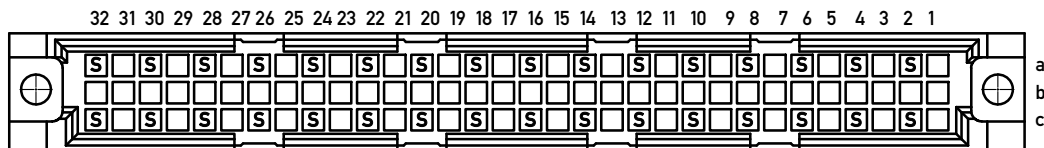


Bestückungsplan / contact layout



Leiterplatten-Lochbild / PCB drillhole pattern

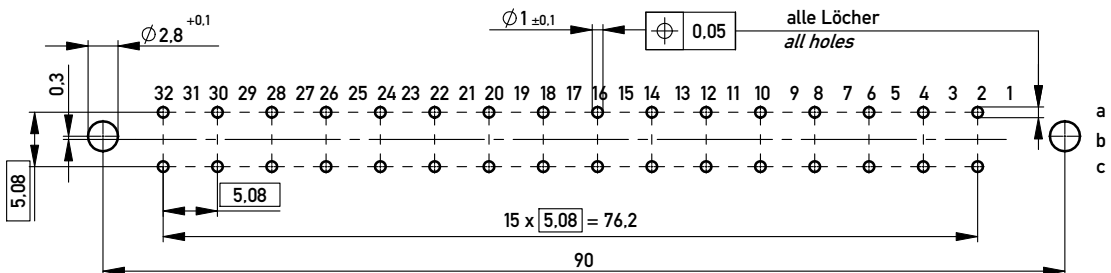

Stecklänge / mating length



E = early mate, late break / voreilend
S = standard
L = late mate, early break / nacheilend

Lötanschluß 0,6x0,6mm /

Solder Terminal 0,6x0,6mm

Isolierwerkstoff / housing material : PBT GF 30

Bauart 4 / type 4

Anforderungsstufe 1 = 500 Steckzyklen / performance class 1 = 500 mating cycles

Fehlende Maße und Angaben nach IEC 60 603-2 / DIN EN 60 603-2

Missing information and dimensions per IEC 60 603-2 / DIN EN 60 603-2

Bedruckung siehe Zeichnung 294905

Marking see drawing 294905

Copyright by ERNI GmbH
Property notice pursuant to ISO 10116 to be observed

Information:				Tolerances		 All Dimensions in mm		Scale		2:1			
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.				Subject to modification without prior notice. Drawing will not be updated.				Designation					
								Messerleiste R 32 Löt <i>Male Connector R 32 Solder</i>					
												www.ERNI.com	
-		21.09.2009						384706				I	
Index		Date						Class				STVR	A3

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16016 to be observed.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[384706](#)