


LOC	DIST	REVISIONS				DATE	DWN	APVD
—	—	P	LTR	DESCRIPTION				
		C		Contact pin base material change from CuSn (Phosphor bronze) to CuZn (Brass). Plating change from MIN. 0.8µm gold plating to min. 0.7µm Pd Ni + 0.1µm gold flash at contact area (Area F).		17JUL2014	TJ	JK

POLZ PRO REIHE	L±0.4	BESTELL-NR.	
—	—	—	—
2	5.08	828 132	2
3	7.62		3
4	10.16		4
5	12.70		5
6	15.24		6
7	17.78		7
8	20.32		8
9	22.86		9
10	25.40	1	0
11	27.94	1	1
12	30.48	1	2
13	33.02	1	3
14	35.56	1	4
15	38.10	1	5
16	40.64	1	6
17	43.18	1	7
18	45.72	1	8
19	48.26	1	9
20	50.80	2	0
21	53.34	2	1
22	55.88	2	2
23	58.42	2	3
24	60.96	2	4
25	63.50	2	5
26	66.04	2	6
27	68.58	2	7
28	71.12	2	8
29	73.66	2	9
30	76.20	3	0
31	78.74	3	1
32	81.28	3	2
33	83.82	3	3
34	86.36	3	4
35	88.90	3	5
36	91.44	3	6
37	93.98	3	7
38	96.52	3	8
39	99.06	3	9
40	101.60	4	0
41	104.14	4	1
42	106.68	4	2
43	109.22	4	3
44	111.76	4	4
45	114.30	4	5
46	116.84	4	6
47	119.38	4	7
48	121.92	4	8
49	124.46	4	9
50	127.00	5	0

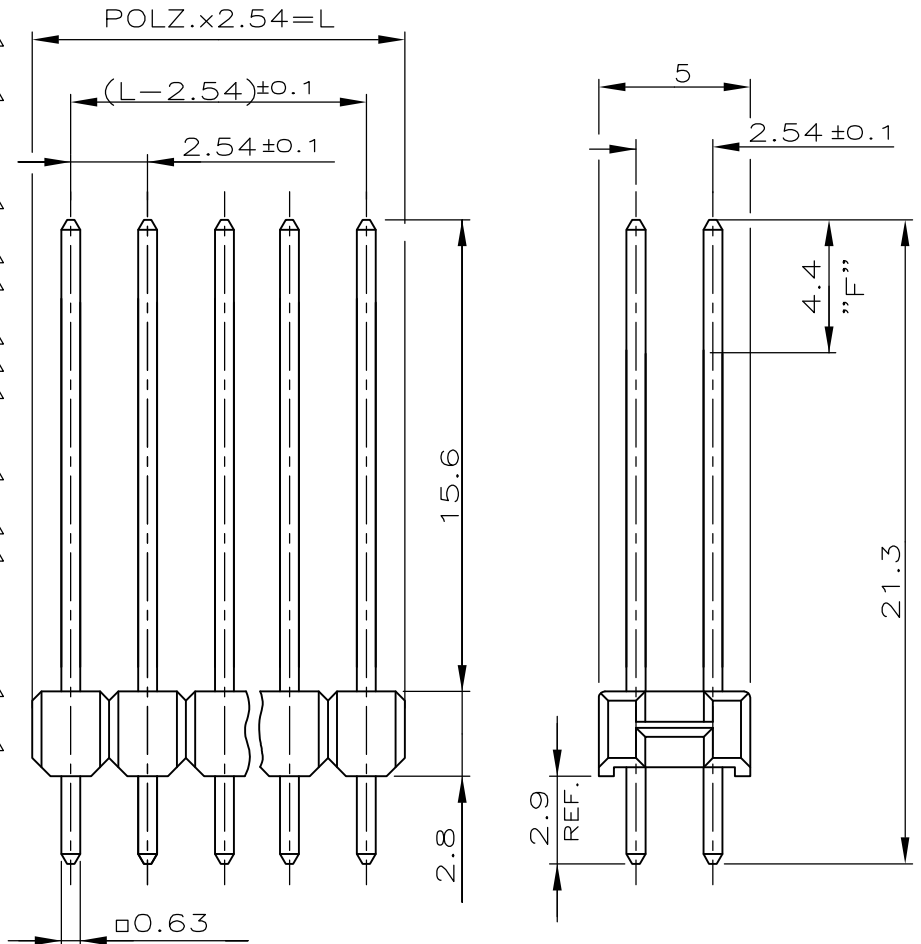

1 STECKSEITE: IM BEREICH "F" 0.7µm PdNi+0.1µm GOLD FLASH
ÜBER 1.27µm NICKEL
LÖTSEITE: MIN. 2.5µm ZINN ÜBER 1.27 µm NICKEL

2 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

KONTAKTSTIFT	Cu Zn	1
STIFTGEHÄUSE	PBT GV	GRÜN
BENENNUNG	WERKSTOFF	OBERFLÄCHE FARBE

DIMENSIONS: mm	DWN G.HOLAUS	31.08.89	MATERIAL —	FINISH —
	CHK SCHAAR.	—	 TE Connectivity	
TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD —	—		
0 PLC ±0.2	PRODUCT SPEC 108-18012	—	NAME AMPMODU II STIFTLEISTE ZWEIREIHIG	
1 PLC ±	APPLICATION SPEC —	—		
2 PLC ±	WEIGHT —	—	SIZE A4	CAGE CODE 00779
3 PLC ±	CUSTOMER DRAWING		DRAWING NO C-828132	RESTRICTED TO —
4 PLC ±			SCALE 4:1	SHEET 1 OF 1
ANGLES ±			REV C	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[828132-5](#)