

## Interface module - VIP-3/SC/FLK34 - 2315065

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VARIOFACE module, with screw connection and flat-ribbon cable connector, for mounting on NS 35 rails, with pin strip and short and long locking latches for socket strips, 34-pos.

### Product Features

- 10 to 64-pos.
- Metal foot
- According to IEC 60603-13
- 1:1 connection
- Screw connection



### Key Commercial Data

Packing unit	1 pc
Weight per Piece (excluding packing)	182.2 g
Custom tariff number	85369010
Country of origin	United States

### Technical data

#### Dimensions

Width	67.3 mm
Height	69 mm
Depth	62 mm

#### Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

#### General

## Interface module - VIP-3/SC/FLK34 - 2315065

### Technical data

#### General

Max. perm. operating voltage	60 V AC/DC
Max. perm. current (per branch)	1 A
Number of positions	34
Status display	No
Mounting position	any
Standards/regulations	IEC 60664
	DIN EN 50178
	IEC 62103
Rated surge voltage	0.6 kV
Degree of pollution	2
Overvoltage category	II

#### Connection data for connection 1

Connection name	Field level
Connection in acc. with standard	IEC / EN
Connection method	Screw connection
Stripping length	8 mm
Screw thread	M 3
Conductor cross section solid	0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>
Conductor cross section flexible	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section AWG	24 ... 12

#### Connection data for connection 2

Connection name	Controller level
Connection method	IDC/FLK pin strip (2.54 mm)
Number of connections	1
Number of positions	34

#### Standards and Regulations

Connection in acc. with standard	CSA
Standards/regulations	IEC 60664
	DIN EN 50178
	IEC 62103
Degree of pollution	2
Overvoltage category	II

## Interface module - VIP-3/SC/FLK34 - 2315065

### Classifications

#### eCl@ss

eCl@ss 4.0	27250313
eCl@ss 4.1	27250313
eCl@ss 5.0	27250313
eCl@ss 5.1	27250313
eCl@ss 6.0	27242608
eCl@ss 7.0	27141152
eCl@ss 8.0	27141152
eCl@ss 9.0	27141152

#### ETIM

ETIM 2.0	EC001434
ETIM 3.0	EC001604
ETIM 4.0	EC001604
ETIM 5.0	EC002780

#### UNSPSC

UNSPSC 6.01	30211824
UNSPSC 7.0901	39121421
UNSPSC 11	39121421
UNSPSC 12.01	39121421
UNSPSC 13.2	39121421

### Approvals

#### Approvals

---

#### Approvals

CSA / cUL Recognized / UL Recognized / EAC / EAC / EAC / cULus Recognized

---

#### Ex Approvals

---

#### Approvals submitted

---

#### Approval details

# Interface module - VIP-3/SC/FLK34 - 2315065

## Approvals

CSA	
mm <sup>2</sup> /AWG/kcmil	30-12
Nominal current IN	1 A
Nominal voltage UN	125 V

cUL Recognized	
mm <sup>2</sup> /AWG/kcmil	30-12
Nominal current IN	1 A
Nominal voltage UN	125 V

UL Recognized	
mm <sup>2</sup> /AWG/kcmil	30-12
Nominal current IN	1 A
Nominal voltage UN	125 V

EAC
-----

EAC
-----

EAC
-----

cULus Recognized
------------------

## Accessories

Accessories

System cable

## Interface module - VIP-3/SC/FLK34 - 2315065

### Accessories

#### Cable - VIP-CAB-FLK34/0,14/0,5M - 2318703



Assembled round cable with two molded 34-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 0.5 m

---

#### Cable - VIP-CAB-FLK34/0,14/1,0M - 2318716



Assembled round cable with two molded 34-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 1 m

---

#### Cable - VIP-CAB-FLK34/0,14/1,5M - 2318729



Assembled round cable with two molded 34-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 1.5 m

---

#### Cable - VIP-CAB-FLK34/0,14/2,0M - 2318732



Assembled round cable with two molded 34-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 2 m

---

#### Cable - VIP-CAB-FLK34/0,14/3,0M - 2318745



Assembled round cable with two molded 34-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 3 m

## Interface module - VIP-3/SC/FLK34 - 2315065

### Accessories

#### Cable - VIP-CAB-FLK34/0,14/4,0M - 2318758



Assembled round cable with two molded 34-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 4 m

---

#### Cable - VIP-CAB-FLK34/0,14/6,0M - 2318761



Assembled round cable with two molded 34-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 6 m

---

#### Cable - VIP-CAB-FLK34-0,14/... - 2318774



Assembled round cable with two molded 34-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: Variable

---

#### Cable - FLK 34/EZ-DR/ 50/KONFEK - 2299479



Round cable set, with two 34-pos. socket strips (1:1 connection), cable length: 0.5 m

---

#### Cable - FLK 34/EZ-DR/ 100/KONFEK - 2299482



Round cable set, with two 34-pos. socket strips (1:1 connection), cable length: 1 m

## Interface module - VIP-3/SC/FLK34 - 2315065

### Accessories

Cable - FLK 34/EZ-DR/ 150/KONFEK - 2299495



Round cable set, with two 34-pos. socket strips (1:1 connection), cable length: 1.5 m

---

Cable - FLK 34/EZ-DR/ 200/KONFEK - 2299505



Round cable set, with two 34-pos. socket strips (1:1 connection), cable length: 2 m

---

Cable - FLK 34/EZ-DR/ 300/KONFEK - 2299518



Round cable set, with two 34-pos. socket strips (1:1 connection), cable length: 3 m

---

Cable - FLK 34/EZ-DR/ 400/KONFEK - 2299521



Round cable set, with two 34-pos. socket strips (1:1 connection), cable length: 4 m

---

Cable - FLK 34/EZ-DR/ 600/KONFEK - 2299534



Round cable set, with two 34-pos. socket strips (1:1 connection), cable length: 6 m

---

## Interface module - VIP-3/SC/FLK34 - 2315065

### Accessories

Cable - FLK 34/EZ-DR/ 800/KONFEK - 2299547



Round cable set, with two 34-pos. socket strips (1:1 connection), cable length: 8 m

---

Cable - FLK 34/EZ-DR/1000/KONFEK - 2299550



Round cable set, with two 34-pos. socket strips (1:1 connection), cable length: 10 m

---

### Terminal marking

Marker for terminal blocks - UC-TM 4 - 0818111



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK CLED, BLUEMARK LED, Plotter, Mounting type: Snap into tall marker groove, for terminal block width: 4.2 mm, Lettering field: 3.6 x 10.5 mm

---

Marker for terminal blocks - UC-TM 6 - 0818085



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK CLED, BLUEMARK LED, Plotter, Mounting type: Snap into tall marker groove, for terminal block width: 6.2 mm, Lettering field: 5.6 x 10.5 mm

---

Zack marker strip - ZB 5,08:UNBEDRUCKT - 0809793



Zack marker strip, Strip, white, unlabeled, can be labeled with: Plotter, Mounting type: Snap into tall marker groove, for terminal block width: 5.08 mm, Lettering field: 4.98 x 10.5 mm

---



## Interface module - VIP-3/SC/FLK34 - 2315065

### Accessories


Zack marker strip - ZB 22:UNBEDRUCKT - 0811862



Zack marker strip, Strip, white, unlabeled, can be labeled with: Plotter, Mounting type: Snap into tall marker groove, for terminal block width: 22 mm, Lettering field: 10.5 x 21.8 mm

### Drawings

Circuit diagram

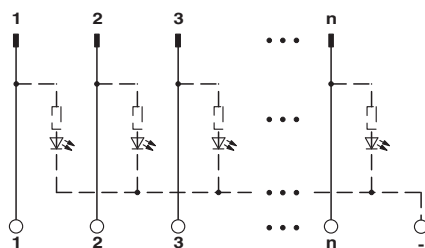

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[2315065](#)