

Power PCB Relay RT Inrush Power

- 1 pole 16A, 1 form A (NO) contact (AgSnO₂ or W pre-make contact + AgSnO₂)
- Mono- or bistable coil
- 5kV/10mm coil-contact
- Reinforced insulation
- Test tab (manual operator) optional for RTT3T bistable versions
- WG version: product in accordance to IEC60335-1
- RTS3T: Electronic ballast UL508/NEMA 410 rated
- RTSET: 8A Electronic ballast rated

Typical applications

LED lighting systems, filament and incandescent lamp loads, movement detectors, light sensors, intelligent wall sockets, motors (RTS3L), bus system actuators.

Approvals

VDE Cert. No. 40007571, UL E214025, cCSAus 1142018

Technical data of approved types on request.

Contact Data	RT.3T / RTSET	RTS3L
Contact arrangement	1 form A (NO) contact	
Rated voltage	250VAC	
Max. switching voltage	480VAC	
Rated current	16A	
Limiting continuous current	16A	20A
Limiting making current, max. 20ms (incand. lamps)	165A peak	120A peak
max. 200µs	800A peak	
Breaking capacity max.	4000VA	
Contact material	W (pre-make cont.) +AgSnO ₂	AgSnO ₂
Contact style	pre-make contact	single contact
Frequency of operation, with/without load	360/3600h ⁻¹	
Operate/release time max., DC coil	10/5ms	
Operate/Reset time max., bistable version	10/10ms	
Bounce time max.	4ms	


Contact ratings

Type	Contact	Load	Cycles
IEC 61810			
RTS3L	A (NO)	20A, 250VAC resistive, 70°C	20x10 ³
RTS3L monostable	A (NO)	16A, 250VAC resistive, 85°C	100x10 ³
RTS3T	A (NO)	16A, 250VAC resistive, 85°C	5x10 ³
In process:			
Type	Contact	Load	Cycles
RTSET	A (NO)	16A, 250VAC resistive, 85°C	5x10 ³
RTSET	A (NO)	16A, 250VAC cosphi = 0.6, 85°C	5x10 ³

UL 508

RTS3L	A (NO)	20A, 250VAC, general purpose, 70°C	20x10 ³
RTS3L	A (NO)	16A, 250VAC, resistive, 85°C	50x10 ³
RTS3L	A (NO)	TV8, 240VAC, 40°C	25x10 ³
RTS3L	A (NO)	1.5hp, 240VAC, 70°C	30x10 ³
RTS3T	A (NO)	1200W Tungsten, 120VAC/277VAC, 60Hz, 50°C	6x10 ³
RTS3T	A (NO)	2A, 480VAC, magnetic ballast, 80°C	10x10 ³ *
RTS3T	A (NO)	2A, 480VAC, electronic ballast, 80°C	10x10 ³ *
RTS3T	A (NO)	3A, 277VAC, electronic ballast, 80°C	15x10 ³
RTS3T	A (NO)	5A, 120VAC, electronic ballast, 80°C	15x10 ³
RTS3T	A (NO)	5A, 277VAC, electronic ballast, 85°C	10x10 ³
RTS3T	A (NO)	5A, 347VAC, electronic ballast, 105°C with z.c	10x10 ³ *
RTS3T	A (NO)	5A, 347VAC, magnetic ballast, 105°C	10x10 ³
RTS3T	A (NO)	3A, 480VAC, magnetic ballast, 105°C	10x10 ³ *
RTSET	A (NO)	16A, 250VAC, general purpose, 85°C	5x10 ³
RTSET	A (NO)	8A, 277VAC, electronic ballast, 85°C	6x10 ³
RTSET	A (NO)	5A, 277VAC, electronic ballast, 85°C	10x10 ³
RTSET	A (NO)	3A, 277VAC, electronic ballast, 85°C	20x10 ³
RTSET	A (NO)	5A, 120VAC, electronic ballast, 85°C	20x10 ³

* Special test conditions available on request

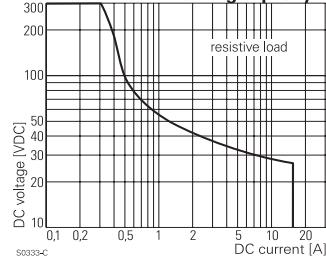
Max. DC load breaking capacity

Contact Data (continued),

Mechanical endurance	RT.3T / RTSET	RTS3L
DC coil	>5x10 ⁶ ops.	>10x10 ⁶ ops.
bistable version	>3x10 ⁶ ops.	>5x10 ⁶ ops.
tab manually operated	>1x10 ³ ops.	-

Coil Data, monostable DC coil

RT.3T	RTSET	RTS3L
Coil voltage range	5 to 110VDC	
Operative range, IEC 61810	2	


Coil versions, monostable DC coil

Coil code	Rated voltage VDC	Operate voltage VDC	Release voltage VDC	Coil resistance Ω±10% ¹⁾	Rated coil power mW
005	5	3.5	0.5	62	403
006	6	4.2	0.6	90	400
009	9	6.3	0.9	203	400
012	12	8.4	1.2	360	400
024	24	16.8	2.4	1440	400
048	48	33.6	4.8	5520	417
060	60	42.0	6.0	8570 ¹⁾	420
110	110	77.0	11.0	28800 ¹⁾	420

1) Coil resistance ±12%.

All figures are given for coil without pre-energization, at ambient temperature +23°C.

Other coil voltages on request.

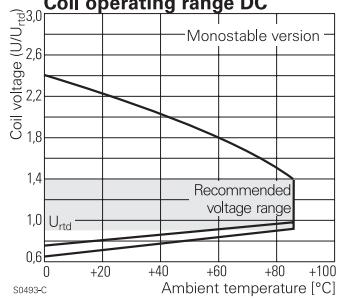Coil operating range DC


Power PCB Relay RT Inrush Power (Continued)
Coil Data (continued),
bistable coils

	1 coil	2 coils
Magnetic system	polarized, bistable	
Coil voltage range	3 to 24VDC	
Operative range, IEC 61810	2	
Limiting voltage, % of rated coil voltage	120%	150%
Min./Max. energization duration	30ms/1min at <10% duty factor	
Coil insulation system according UL1446		class F

Coil Data
RT.3T
RTS3L
Coil versions, bistable

Coil code	Rated voltage VDC	Set voltage VDC	Reset voltage VDC	Coil resistance $\Omega \pm 10\%$	Rated coil power mW
Coil versions, bistable 1 coil					
A03	3	2.1	1.7	21	429
A12	12	8.4	6.6	360	400
A24	24	16.8	13.2	1440	400

Coil versions, bistable 2 coils

F03	3	2.1	1.7	15
F12	12	8.4	6.6	240
F24	24	16.8	13.2	886

All figures are given for coil without pre-energization, at ambient temperature +23°C.

Other coil voltages on request.

Coil Data
RTSET
Coil versions, bistable

Coil code	Rated voltage VDC	Set voltage VDC	Reset voltage VDC	Coil resistance $\Omega \pm 10\%$	Rated coil power mW
Coil versions, bistable 1 coil					
A03	3	2.1	1.8	21	429
A12	12	8.4	7.2	360	400
A24	24	16.8	14.4	1440	400

Coil versions, bistable 2 coils


F03	3	2.1	1.8	15
F12	12	8.4	7.2	240
F24	24	16.8	14.4	886

All figures are given for coil without pre-energization, at ambient temperature +23°C.


Other coil voltages on request.

Bistable coils - operation

Version	1 coil		2 coils	
Coil terminals	A1	A2	A1	A3
Operate	+	-		+
Reset	-	+	-	+
Contact position not defined at delivery				

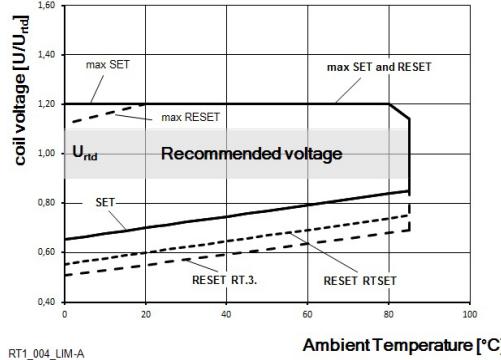Coil operating range: 1 bistable coil


RT1_004_LIM-A

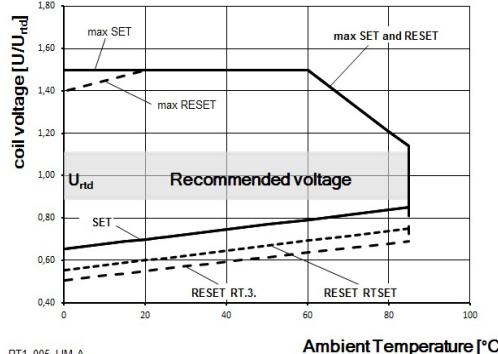Coil operating range: 2 bistable coils

Insulation Data

Initial dielectric strength between open contacts	1250V _{rms}
between contact and coil	5000V _{rms}
Clearance/creepage between contact and coil	$\geq 10/10\text{mm}$
Material group of insulation parts	IIIa
Tracking index of relay base	PTI 250V

Other Data

Material compliance: EU RoHS/ELV, China RoHS, REACH, Halogen content refer to the Product Compliance Support Center at www.te.com/customersupport/rohssupportcenter

Ambient temperature RT.3T / RTS3L

monostable DC coil	-40 to 105°C
bistable 1 coil	-10 to 105°C
bistable 2 coils	-40 to 105°C

Ambient temperature RTSET

monostable DC coil	-40 to 85°C
bistable 1 coil	-10 to 85°C
bistable 2 coils	-40 to 85°C

RT.3T / RTSET RTS3L

Category of environmental protection IEC 61810	RTII - flux proof
RTIII - wash tight available upon request	
Vibration resistance (functional), monostable version	10g 20g
Shock resistance (destructive)	100g
Terminal type PCB-THT, plug-in ²⁾	
Weight, without / with test tab	14/16g 14g/-
Resistance to soldering heat THT IEC 60068-2-20	270°C/10s

RT.3T / RTSET RTS3L

Packaging/unit without test tab	tube/20 pcs., box/500 pcs.	tube/20 pcs., box/500 pcs.
with test tab	tray/25 pcs., box/100 pcs.	-

2) RTT3T or bistable 2 coil version: PCB mounting only. See Accessories.

Accessories RTS.


For details see datasheet [Accessories Industrial Power Relay RT](#)
Socket available for 1 coil version only.

NOTE: indicated contact ratings and electrical endurance data for direct wiring of relays (according IEC 61810-1); for relays mounted on sockets deratings may apply.


Power PCB Relay RT Inrush Power (Continued)
Terminal assignment

Bottom view on solder pins

monostable version

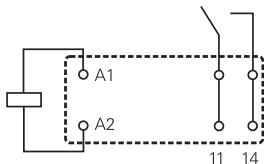

bistable version


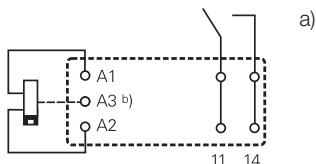


a) Indicated contact position during or after coil energization with reset voltage.

b) for 2 coil version only



Dimensions / PCB layout

version without test tab

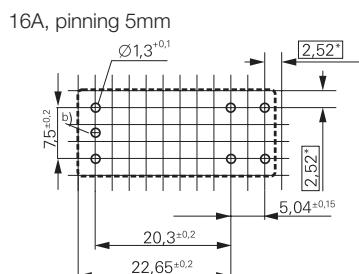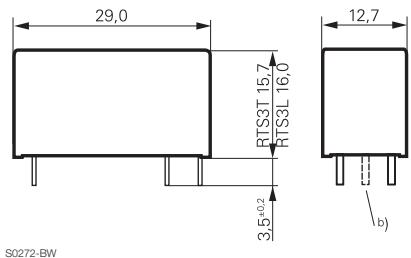

b) for 2 coil version only

version with test tab

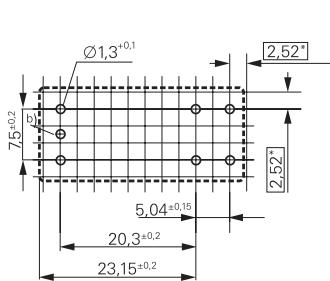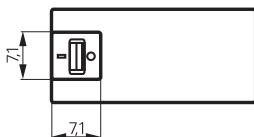

*) With the recommended PCB hole sizes a grid pattern from 2.5mm to 2.54mm can be used.

Power PCB Relay RT Inrush Power (Continued)

Product code structure

 Typical product code **RT** **S** **3** **T** **A12**

Type	RT	Power PCB Relay RT1 Inrush Power					
Version	S	Without test tab	T	With test tab (manual operator) for version 'RTT3T' bistable coil only			
Contact configuration	3	1 form A (NO) contact	E	1 form A(NO) 'electronic ballast' contact			
Contact material	L	AgSnO ₂	T	Tungsten (W) pre-make + AgSnO ₂			
Coil	Coil code: please refer to coil versions table						
Version	Blank Standard Version WG Product in accordance to IEC 60335-1						

Product code	Version	Contacts	Contact material	Coil version	Coil	Version	Part number
RTS3L005	Without test tab, 16mm high	1 form A (NO) contact	AgSnO ₂	Monostable	5VDC 6VDC 12VDC 24VDC	Standard	1-1415898-8 4-1415898-4 1-1415898-9 1-1415898-4
RTS3L012				Bistable, 1 coil	12VDC		2-1415898-3
RTS3L024				Bistable, 2 coils	24VDC		2-1415898-5
RTS3LA12					5VDC		1-1415898-6
RTS3LF12					12VDC		1415898
RTS3T005	Without test tab, 15.7mm high		W pre-make + AgSnO ₂	Monostable	24VDC		1415898-1
RTS3T012					48VDC		1-1415898-1
RTS3T024					60VDC		1-1415898-2
RTS3T048					5VDC		1-1415898-5
RTS3T060					6VDC		3-1415898-1
RTS3TA05				Bistable, 1 coil	12VDC		1415898-2
RTS3TA06					3VDC		1415898-4
RTS3TA12					12VDC		1415898-5
RTS3TF03				Bistable, 2 coils	24VDC		1415898-6
RTS3TF12					5VDC		1415898-7
RTS3TF24					12VDC		1415898-0
RTT3TA12	With test tab, 23.6mm high			Bistable, 1 coil	24VDC		2-1415898-7
RTT3TF24				Bistable, 2 coils	12VDC		5-1415898-1
RTS3L012WG	Without test tab, 15.7 mm high	1form A (NO) contact	AgSnO ₂	Monostable	12VDC 24VDC	IEC60335-1 compliant	5-1415898-6 4-1415898-7
RTS3L024WG					12VDC		5-1415898-7
RTS3T012WG					24VDC		4-1415898-7
RTS3TA24WG				Bistable 1 coil	5VDC		7-1415898-7
RTSET005	Without test tab, 15.7mm high	1 form A (NO) contact	W pre-make + AgSnO ₂	Monostable	12VDC 24VDC	Standard	7-1415898-9
RTSET012					12VDC		8-1415898-0
RTSET024					24VDC		8-1415898-6
RTSETA12				Bistable, 1 coil	12VDC		8-1415898-7
RTSETA24					24VDC		9-1415898-1
RTSETF12				Bistable, 2 coils	12VDC		9-1415898-3
RTSETF24					24VDC		

This list represents the most common types and does not show all variants covered by this datasheet.
Other types on request.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-1415898-5](#)