


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	H1	REVISED PER ECO-16-012733	07SEP2016	NK	MM

- | | |
|---|---|
| 1 | ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS. |
| 2 | TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE
HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD. |
|  | THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING. |
|  | POINT OF MEASUREMENT FOR PLATING THICKNESS. |
|  | OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI. |

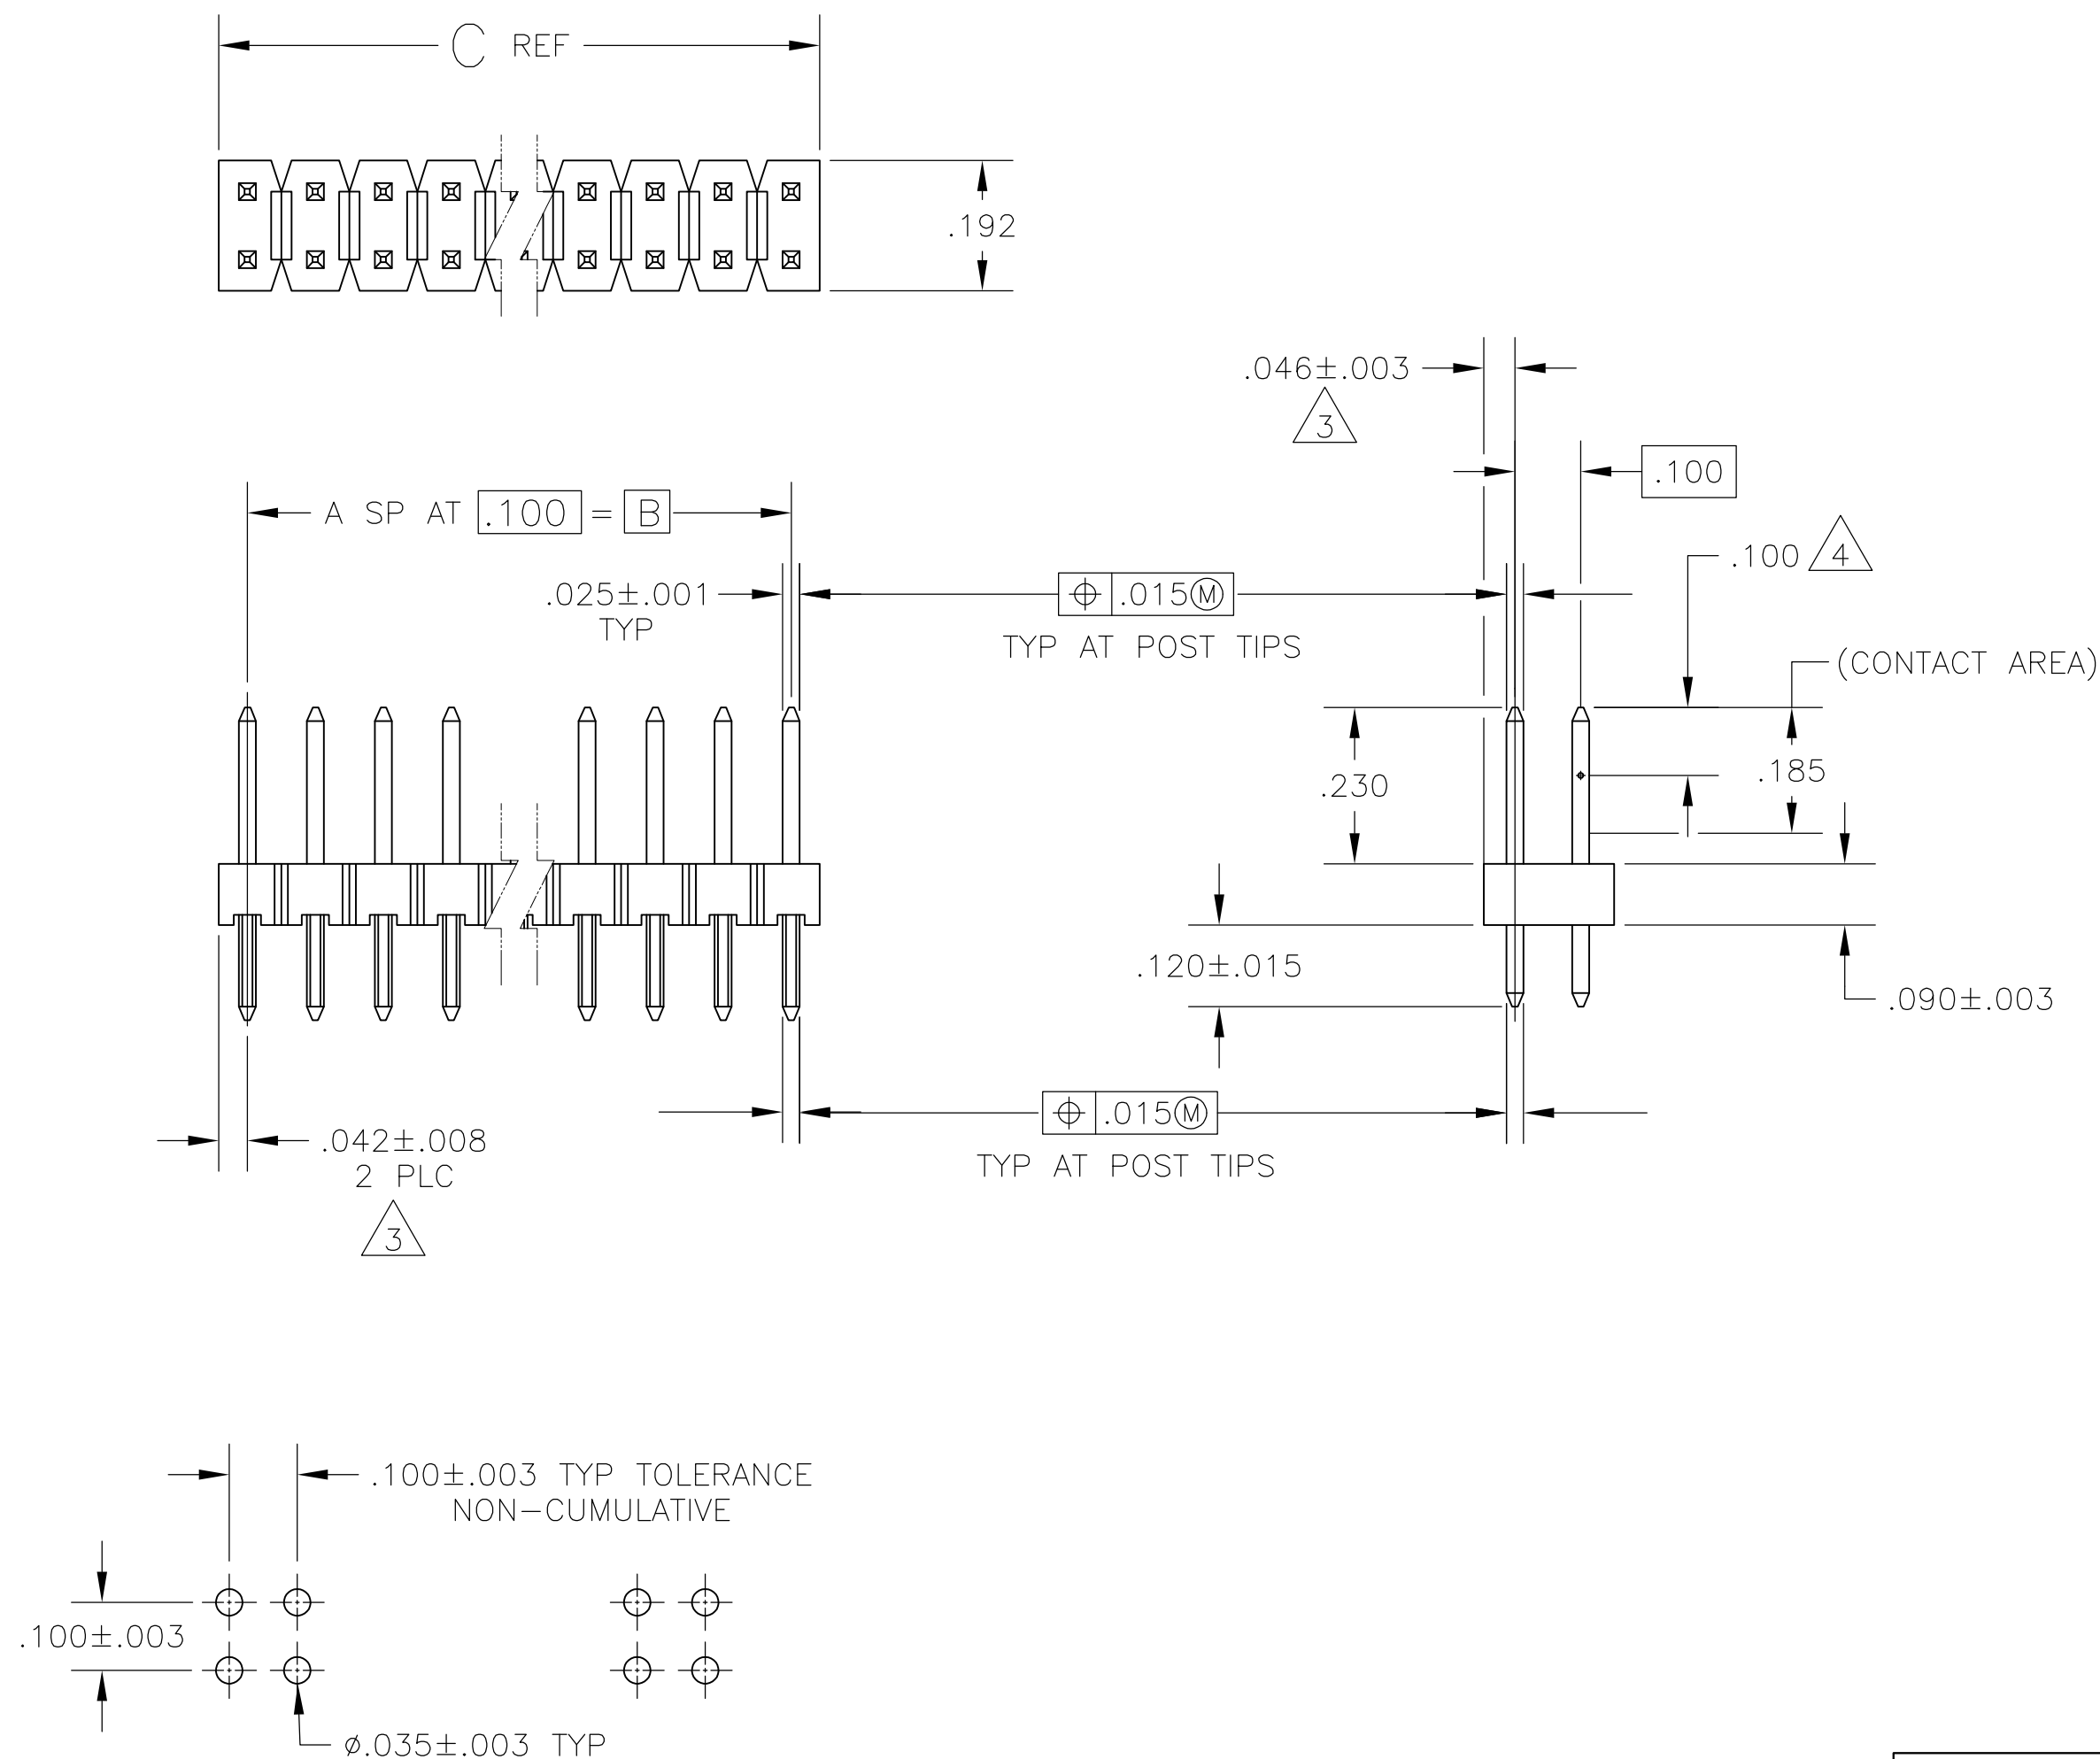

RECOMMENDED HOLE LAYOUT

		3.984	3.900	39	80	4-103240-0
	OBSOLETE 5	3.884	3.800	38	78	3-103240-9
		3.784	3.700	37	76	3-103240-8
		3.684	3.600	36	74	3-103240-7
		3.584	3.500	35	72	3-103240-6
	OBSOLETE 5	3.484	3.400	34	70	3-103240-5
		3.384	3.300	33	68	3-103240-4
		3.284	3.200	32	66	3-103240-3
		3.184	3.100	31	64	3-103240-2
		3.084	3.000	30	62	3-103240-1
		2.984	2.900	29	60	3-103240-0
5	OBSOLETE	2.884	2.800	28	58	2-103240-9
		2.784	2.700	27	56	2-103240-8
5	OBSOLETE	2.684	2.600	26	54	2-103240-7
		2.584	2.500	25	52	2-103240-6
		2.484	2.400	24	50	2-103240-5
5	OBSOLETE	2.384	2.300	23	48	2-103240-4
		2.284	2.200	22	46	2-103240-3
		2.184	2.100	21	44	2-103240-2
5	OBSOLETE	2.084	2.000	20	42	2-103240-1
		1.984	1.900	19	40	2-103240-0
		1.884	1.800	18	38	1-103240-9
5	OBSOLETE	1.784	1.700	17	36	1-103240-8
		1.684	1.600	16	34	1-103240-7
		1.584	1.500	15	32	1-103240-6
5	SUPERSEDED BY 6-146257-1	1.484	1.400	14	30	1-103240-5
		1.384	1.300	13	28	1-103240-4
5	SUPERSEDED BY 6-146257-3	1.284	1.200	12	26	1-103240-3
		1.184	1.100	11	24	1-103240-2
5	SUPERSEDED BY 6-146257-5	1.084	1.000	10	22	1-103240-1
		.984	.900	9	20	1-103240-0
		.884	.800	8	18	103240-9
		.784	.700	7	16	103240-8
		.684	.600	6	14	103240-7
		.584	.500	5	12	103240-6
		.484	.400	4	10	103240-5
		.384	.300	3	8	103240-4
		.284	.200	2	6	103240-3
		.184	.100	1	4	103240-2
		.084	—	—	2	103240-1
		C	B	A	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN H MOLL 130CTB7		 TE Connectivity				
		CHK T. CLARK 200CTB7						
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED: T. CLARK 200CTB7		NAME HEADER ASSY, MOD II, BREAKAWAY, DOUBLE ROW, .100X.100 Q, VERTICAL, WITH .025 SQ POSTS				
		APVD						
		PRODUCT SPEC						
		APPLICATION SPEC						
MATERIAL		FINISH : POST:		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR-BLACK		.000030 GOLD ON CONTACT AREA, .000100-.000200 MATTIE TIN-LEAD ON SOLDER TAIL ALL OVER .000050 NICKEL		WEIGHT	A2 00779 G-103240		—	
POST: COPPER ALLOY				CUSTOMER DRAWING		SCALE	SHEET	REV
						4:1	1 of 1	H1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-103240-0](#)