


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: **0452802053**
Status: **Active**
Overview: Micro-Fit Connector System
Description: Micro-Fit BMI CPI Compliant Pin Header, Blind Mate Interface, Dual Row, Vertical, 20 Circuits, PA Polyamide Nylon 4/6, UL 94V-0, 0.76µm Gold (Au) Selective Contact Plating, Tin (Sn) Tail Plating

Documents:

Drawing (PDF)	Test Summary TS-45280-001-001 (PDF)
3D Model	RoHS Certificate of Compliance (PDF)
Product Specification PS-44300-001-001 (PDF)	Product Literature (PDF)

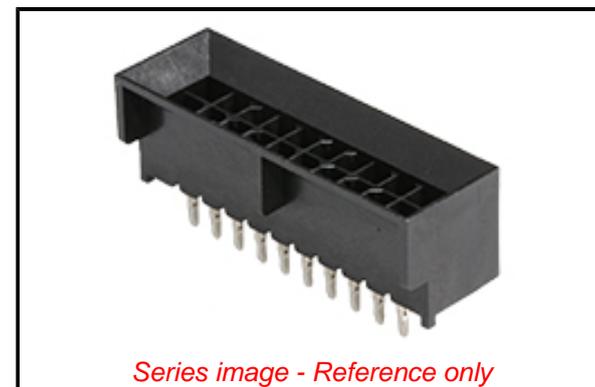

Agency Certification

CSA	LR19980
UL	E29179

Application tooling part link

Application Tooling Part Link	62200-2700
Application Tooling Part Link	62200-8400
Application Tooling Part Link	62203-0450

General

Product Family	PCB Headers
Series	<u>45280</u>
3D Viewer	Yes
Application	Board-to-Board, Power, Wire-to-Board
CURRENT-MAX-NUMERIC	8.5
Overview	<u>Micro-Fit Connector System</u>
PITCH-MATING-NUMERIC	3.00
Product Literature Order No	987650-5984
Product Name	Micro-Fit BMI CPI
UPC	822350590969

Physical

Breakaway	No
Circuits (Loaded)	20
Circuits (maximum)	20
Color - Resin	Black
Durability (mating cycles max)	30
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	Yes
Lock to Mating Part	None
Material - Metal	High Performance Alloy (HPA)
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	3.420/g
Number of Rows	2
Orientation	Vertical
PC Tail Length	4.80mm
PCB Locator	Yes
PCB Retention	Yes
Packaging Type	Tray
Pitch - Mating Interface	3.00mm
Plating min - Mating	0.762µm
Plating min - Termination	2.540µm

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per - ED/71/2019 (16 July 2019)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

45280 Series

Mates With

447692003 Micro-Fit BMI Vertical Receptacle Header, 447642003 Micro-Fit BMI Right Angle Receptacle Header, 441332000 Micro-Fit BMI Panel Mount Receptacle Housing

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
Insertion Tool for Micro-Fit BMI CPI Header Assemblies	<u>622002700</u>
Compliant Pin Insertion Flat Rock Tool	<u>622008400</u>
Removal Tool	<u>622030450</u>

Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	Fully
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	Through Hole - Compliant Pin

Electrical

Current - Maximum per Contact	8.5A
Voltage - Maximum	600V

Solder Process Data

Lead-free Process Capability	N/A
------------------------------	-----

Material Info**Reference - Drawing Numbers**

Product Specification	PS-44300-001-001
Sales Drawing	SD-45280-002
Symbol/Footprint Data	SYM-45280-2001
Test Summary	TS-45280-001-001

This document was generated on 09/25/2019

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[45280-2053](#)