


XS7T2DA214LD01

inductive sensor XS7 26x26x26 - plastic -
Sn10mm - 12..48VDC - M12

Product availability: Non-Stock - Not normally stocked in distribution facility

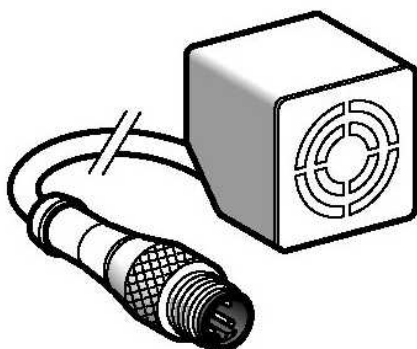

Main

Commercial Status	Commercialised
Range of product	OsiSense XS
Series name	General purpose
Sensor type	Inductive proximity sensor
Product specific application	-
Sensor name	XS7
Sensor design	Cubic form 26 x 26 x 26
Size	26 mm
Body type	Fixed
Detector flush mounting acceptance	Flush mountable
Material	Plastic
Enclosure material	Plastic
Type of output signal	Discrete
Wiring technique	2-wire
[Sn] nominal sensing distance	0.39 in (10 mm)
Discrete output function	1 NO
Output circuit type	DC
Electrical connection	4 pins M12 remote male connector
Cable length	0.49 ft (0.15 m)
[Us] rated supply voltage	12...48 V DC
Switching capacity in mA	1.5...100 mA
IP degree of protection	IP67

Complementary

Detection face	5 positions turret head
Front material	Plastic
Switching frequency	<= 100 Hz
Marking	CE
Depth	1.02 in (26 mm)
Height	1.02 in (26 mm)
Width	1.02 in (26 mm)

Environment

Product certifications	CCC CSA UL
Ambient air temperature for operation	-13...158 °F (-25...70 °C)

Ordering and shipping details

Category	22486 - SENSORS, PROXIMITY
Discount Schedule	DS2
GTIN	003389110883954
Nbr. of units in pkg.	1
Package weight(Lbs)	0.26

Product availability	Non-Stock - Not normally stocked in distribution facility
Returnability	N
Country of origin	ID

Offer Sustainability

Sustainable offer status	Not Green Premium product
RoHS	Compliant - since 0836 - Schneider Electric declaration of conformity
Product environmental profile	Available Download Product Environmental
Product end of life instructions	Available Download End Of Life Manual

Contractual warranty

Period	18 months
--------	-----------

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Schneider Electric:](#)

[XS7T2DA214LD01](#)