


6 5 4 3 2 1

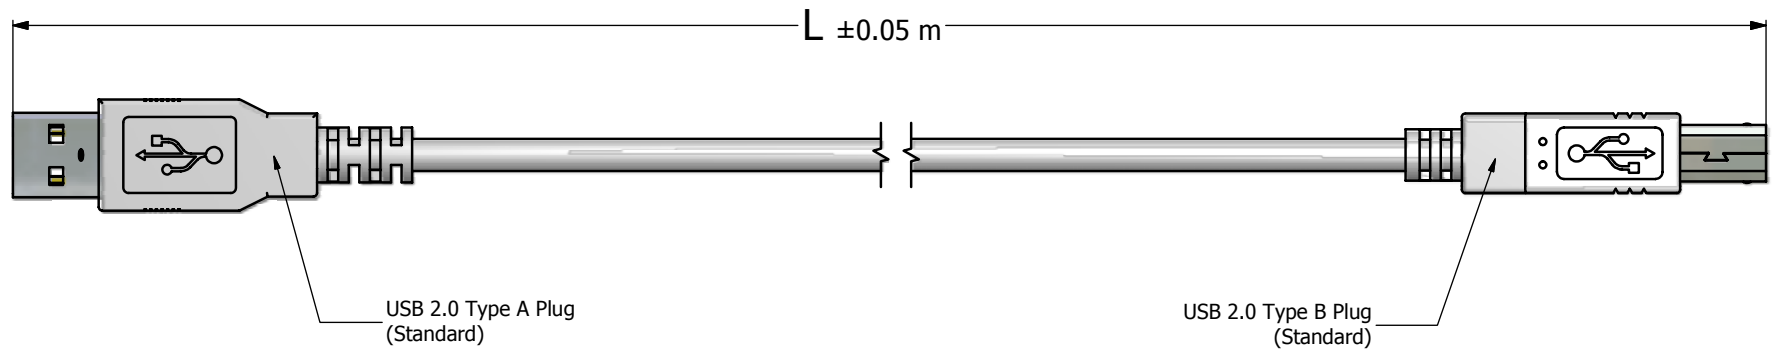

NOTES:

1. Electrical Specifications:

- Meets USB 2.0 specifications
- Low level Contact Resistance: 30 mOhm max.
- Insulation Resistance 1000 MOhm min.
- Currant Rating: 1.5 A max. @ 25°C
- DWV: 500 VAC/60s at sea level
- Operating Temperature: -40°C to +80°C

2. Material and Finish:

- USB Insulato: PBT, UL 94V-0, Color: White
- USB Overmold: PVC, UL 94V-0, Color: Black
- Metal Shell: Copper Alloy, Nickel plated
- Contact Material: Copper Alloy Contact Finish: 30 u" min. Au over 40 u" min. Nickel

3. Shielded USB Cable Conifurgation

AWM 2725 AWG28/1p + AWG24/2c, OD: 4.5 mm, Color: black

4. RoHS compliant

Directive 2002/95/EC
"RoHS"
Compliant

Cable Length L	Part Number
2 m	17-201081
3 m	17-201091
4.5 m	17-201111

THIS DRAWING MAY NOT BE COPIED, OR REPRODUCED IN ANY WAY AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC CORPORATION DOT NOT ALTER CAD DRAWING BY HAND	Customer:			Tolerance Unless otherwise specified			Scale: 1:2:1	Dim. in m		
	Name	Title	Approval Date	0 PLC ±0.30	1 PLC ±0.20		Autodesk Inventor	Material: See Notes		
				2 PLC ±0.10	3 PLC ±0.05	2008		Date	Name	Title: USB Patch Cord Standart to Standard Version Type A Plug to Type B Plug
				ANGLES ±1°						
						Draw.	Sept. 23	Vincent Ke		
						Appd.	Sept. 23	J. chaudry		
						Norm				
						D-old				
	b		Jan/19/2009	Vincent ke					Drawing No.: 17K1A102	DIN A3
	a	original							Part No.: SEE P/N ABOVE	Sheet 1/1
Rev.	Changes	Date	Name							

6 5 4 3 2 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[CONEC:](#)

[17-201081](#) [17-201091](#) [17-201111](#)