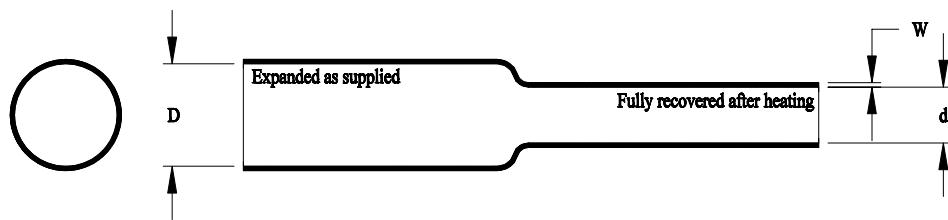


**SFR 1/8" and 3/16"**  
**Silicone Rubber, Flame - Resistant,**  
**Heat - Shrinkable Tubing**



**Table 1: Dimensions** (in inches)

| Size  | Recovered                   |                             |                            |
|-------|-----------------------------|-----------------------------|----------------------------|
|       | Inside Diameter Minimum (D) | Inside Diameter Maximum (d) | Wall Thickness Nominal (W) |
| 1/8"  | .125                        | .070                        | .025 ± .005                |
| 3/16" | .187                        | .100                        | .033 ± .010                |

**Longitudinal Change:** +0 to -10%

**Requirements:** Except as specified above, this tubing shall meet all requirements of Raychem specification RT-1140.

|   |  |                |   |
|---|--|----------------|---|
| <b>Specification Control Drawing</b>  |  |                |   |
| <b>tyco</b><br><hr/> <b>Electronics</b>   | Tyco Electronics Corporation<br>300 Constitutional Drive<br>Menlo Park, CA 94025 USA | <b>Raychem</b> | Title: <b>SFR 1/8" and 3/16"</b><br><b>Silicone Rubber, Flame - Resistant,</b><br><b>Heat - Shrinkable Tubing</b> |
| Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application |  | Document No :  | <b>SFR 1/8" and 3/16"</b>   |
| Cage Code:<br>06090   | Scale:<br>None   | Size:<br>A     | Rev. Date:<br>30-Oct-96   |

If this document is printed it becomes uncontrolled. Check for the latest revision.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[SFR-1/8-0-SP](#)