


THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION
© COPYRIGHT -	By -

ALL RIGHTS RESERVED.


LOC	G	DIST	14	REVISIONS		
P	LTR			DESCRIPTION	DATE	DWN APVD

N2 REVISED PER ECO-11-004820

11MAR11 RK HMR

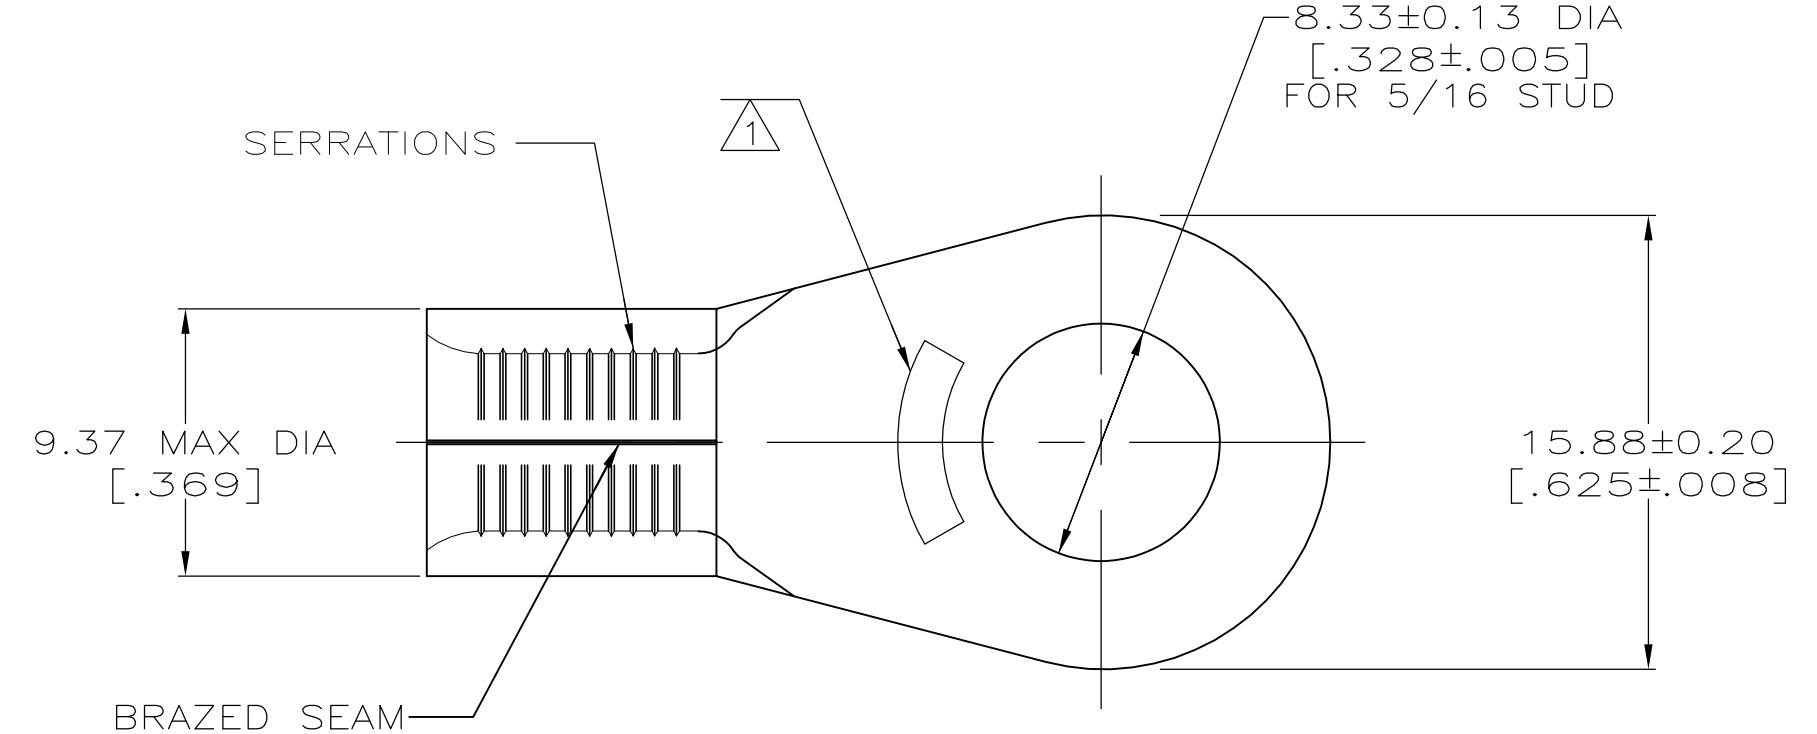

AMP WIRE RANGE	Listed FILE E13288
6 AWG SOLID OR STRANDED	6 AWG STRANDED
LR7189 Certified	MILITARY P/N AND CLASS
6 AWG SOLID OR STRANDED	MS 20659-131 CLASS 2 P/N 33466 & 2-33466-3 ONLY

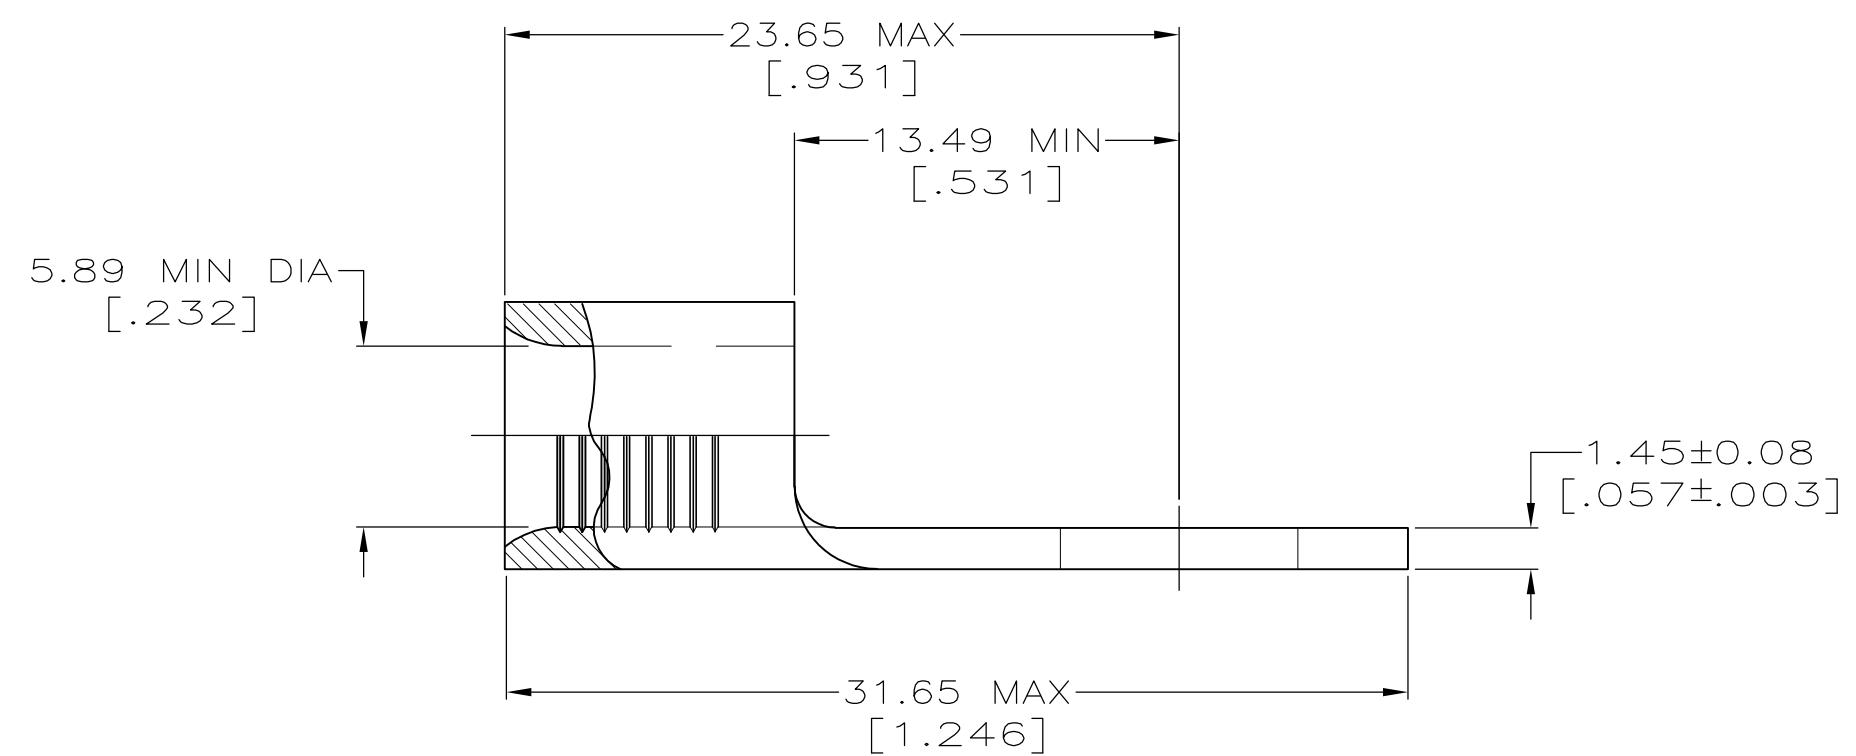

- 1 STAMP AMP 6\* APPROX AS SHOWN
- 2 0.00254 [.000100] MIN TIN PLATE PER ASTM B-545.
- 3 GOLD PLATE 0.00127 [.000050] MIN THK PER ASTM B-488, TYPE 2, GRADE C OVER NICKEL PLATE 0.00076 [.000030] MIN THK PER QQ-N-290.
- 4 SUPERSEDED BY 8-33466-3
- 5 COPPER PER ASTM B-152, ANNEALED

OBSOLETE	2	25	LOOSE PIECE, BAG	8-33466-5
	2	25	LOOSE PIECE, BOX	8-33466-3
	2	500	LOOSE PIECE, BOX	2-33466-4
	2	750	33466 ON TAPE	2-33466-3
	3	----	LOOSE PIECE	2-33466-1
	2	----	LOOSE PIECE	33466
	FINISH	QTY	PACKAGE TYPE	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		3-24-93	
DWN	TA BRINKMAN	3-24-93	
CHK	DA PATTERSON	3-24-93	
APVD	JL MECKLEY	3-24-93	
	PRODUCT SPEC		
	APPLICATION SPEC		
	SIZE	CAGE CODE	DRAWING NO
MATERIAL	-	SEE TABLE	RESTRICTED TO
	WEIGHT	-	A2 00779 C-33466
			CUSTOMER DRAWING
			SCALE 4:1
			1 OF 1
			REV N2

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: 170°C
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: N/A
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	CIRCULAR MIL AREA: 10.5-16.8mm <sup>2</sup> [20,800-33,100] SOLID OR STRANDED
FOR ORDER ENTRY	1-800-526-5142	THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-33466-1](#) [8-33466-3](#)