

4

3


2

1


LOC	DIST	REVISIONS					
CE	16	P	LTR	DESCRIPTION	DATE	DWN	APVD
			D	ECR-14-011637	22AUG2014	HZ	RZ

- 1

MAXIMUM CONNECTOR INSERTION LOSS IS 0.2dB PLUS CABLE ATTENUATION OF 0.7dB/km AT 1310nm. (SEE TABLE)
2. MINIMUM RETURN LOSS: 55 dB
3. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TE STANDARD TEC-138-702.

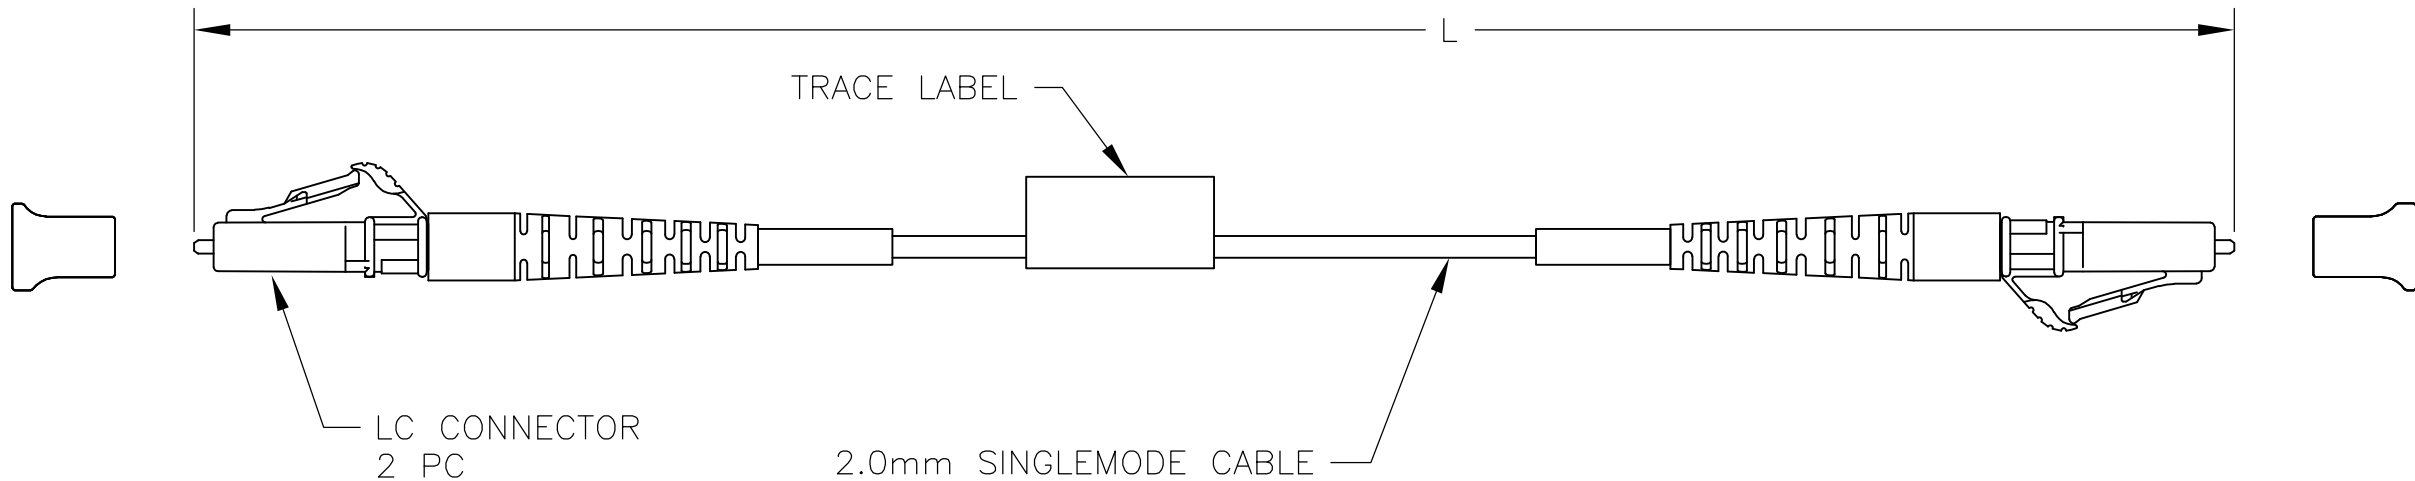

0.20	0.40+0.05/-0.0 [15.74+2.00/-0.0]	1-6374110-1
0.21	10.00±0.15 [393.70±6.0]	1-6374110-0
0.20	2.60±0.05 [102.3±2.0]	6374110-9
0.20	1.63±0.05 [64.0±2.0]	6374110-8
0.20	0.476±0.040 [18.8±1.6]	6374110-7
0.20	0.343±0.040 [13.5±1.6]	6374110-6
0.20	5.00±0.08 [196.90±3.00]	6374110-5
0.20	4.00±0.08 [157.50±3.00]	6374110-4
0.20	3.00±0.05 [118.10±2.00]	6374110-3
0.20	2.00±0.05 [78.70±2.00]	6374110-2
0.20	1.00±0.05 [39.40±2.00]	6374110-1
MAX IL (dB)		PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN KATHY HE 28SEP05		TE Connectivity							
		CHK RICHARD ZHAO 28SEP05									
DIMENSIONS: METERS [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J.DUNCAN 28SEP05				NAME			
		PRODUCT SPEC		CABLE ASSY, FIBER OPTIC, 2.0mm , SM LC TO LC, OPTIMATE —							
		—									
		APPLICATION SPEC									
		—		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO	
MATERIAL —	FINISH —	WEIGHT —		A3		00779		C-6374110		—	
CUSTOMER DRAWING				SCALE NTS		SHEET 1 OF 1		REV D			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-6374110-0](#)