


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION ,19 .  
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

| LOC | DIST | REVISIONS |     |                    |         |     |      |
|-----|------|-----------|-----|--------------------|---------|-----|------|
|     |      | P         | LTR | DESCRIPTION        | DATE    | DWN | APVD |
| G   | 14   |           | G   | REV / 0720-0660-95 | 07JUL95 | ME  | SB   |

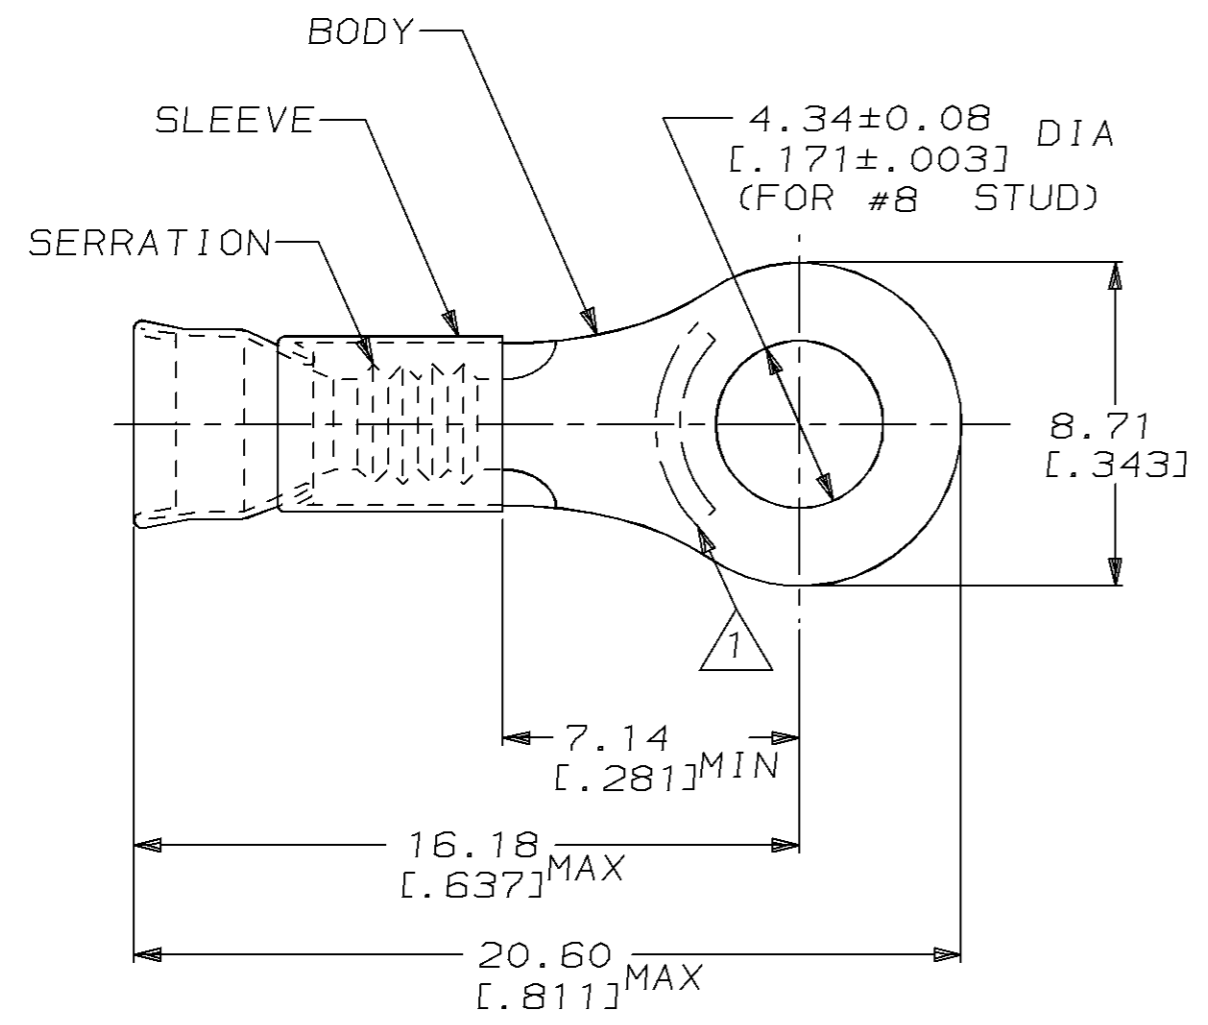

- 1 STAMP AMP 16-14\* APPROX AS SHOWN
- 2. WIRE INSUL DIA, 3.05-4.32 [.120-.170]
- 3. TONGUE MATL THK, 0.79±0.05 [.031±.002]
- 4 NICKEL PLATE PER QQ-N-290
- 5 GOLD PLATE PER MIL-G-45204 OVER NICKEL PLATE PER QQ-N-290

| QTY  | PACKAGE TYPE | PART NO  |
|------|--------------|----------|
| 1000 | LOOSE PIECE  | 322274-1 |
| 1000 | LOOSE PIECE  | 322374   |

**AMP INCORPORATED**  
**CUSTOMER SERVICE SYSTEM**

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS: PRODUCT INFORMATION CENTER 1-800-522-6752

FOR APPLICATION TOOLING INFORMATION: TOOLING ASSISTANCE CENTER 1-800-722-1111

FOR ORDER ENTRY: 1-800-526-5142

MAX RECOMMENDED OPERATING TEMPERATURE:  
 343°C [650°F]

VOLTAGE RATING:  
 -

CIRCULAR MIL AREA:  
 1.04mm<sup>2</sup>-2.62mm<sup>2</sup> [2050-5180]

STRANDED WIRE

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DIMENSIONS: mm [in]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

|        |              |
|--------|--------------|
| 0 PLC  | ±-           |
| 1 PLC  | ±-           |
| 2 PLC  | ±0.20 [.008] |
| 3 PLC  | ±-           |
| 4 PLC  | ±-           |
| ANGLES | ±-           |

FINISH: SEE NOTES 4 & 5

MATERIAL: BODY, CU PER ASTM B152; SLEEVE, NI SIL PER ASTM B122

|                        |  |
|------------------------|--|
| DWN L OLMEDA 100CT94   | <b>AMP</b> AMP Incorporated<br>Harrisburg, PA 17105-3608                       |
| CHK M ELLIS 100CT94    |  |
| APVD S BORTNER 100CT94 |  |
| PRODUCT SPEC           |  |
| APPLICATION SPEC       | NAME TERMINAL, RING TONGUE, STRATO-THERM™, DIAMOND GRIP™, WIRE SIZE, 16-14 AWG |
| WEIGHT -               | SIZE A3 CAGE CODE 00779 DRAWING NO C-322374                                    |
| CUSTOMER DRAWING       | SCALE 6:1 SHEET 1 OF 1 REV G   |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[322374](#)