
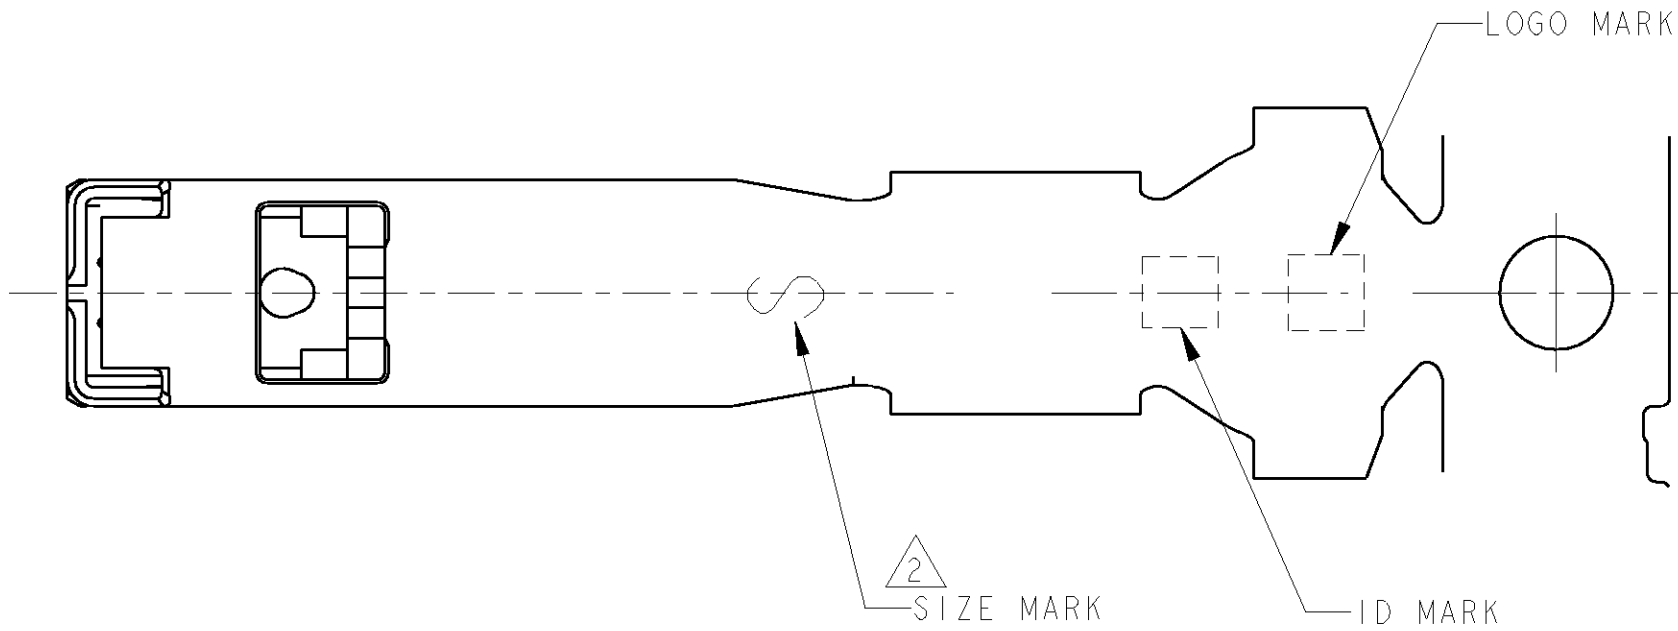
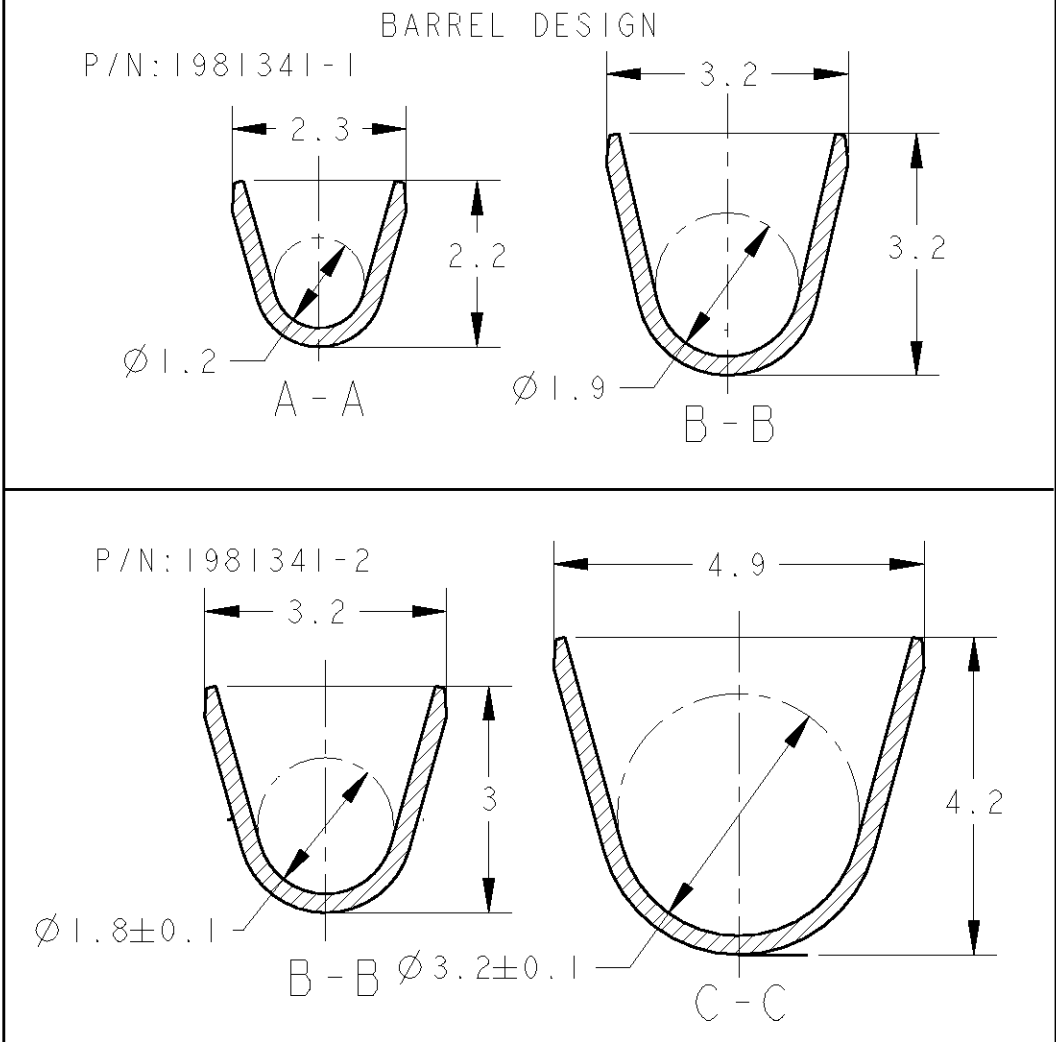


| LOC | DIST | REVISIONS |     |                       |           |          |
|-----|------|-----------|-----|-----------------------|-----------|----------|
| J   | -    | P         | LTR | DESCRIPTION           | DATE      | DWN APVD |
|     |      | A         |     | RELEASED              | 26JUL2007 | S.F Y.F  |
|     |      | B         |     | REVISED ECR-08-014436 | 10JUL2008 | S.F Y.F  |
|     |      |           |     |                       |           |          |
|     |      |           |     |                       |           |          |

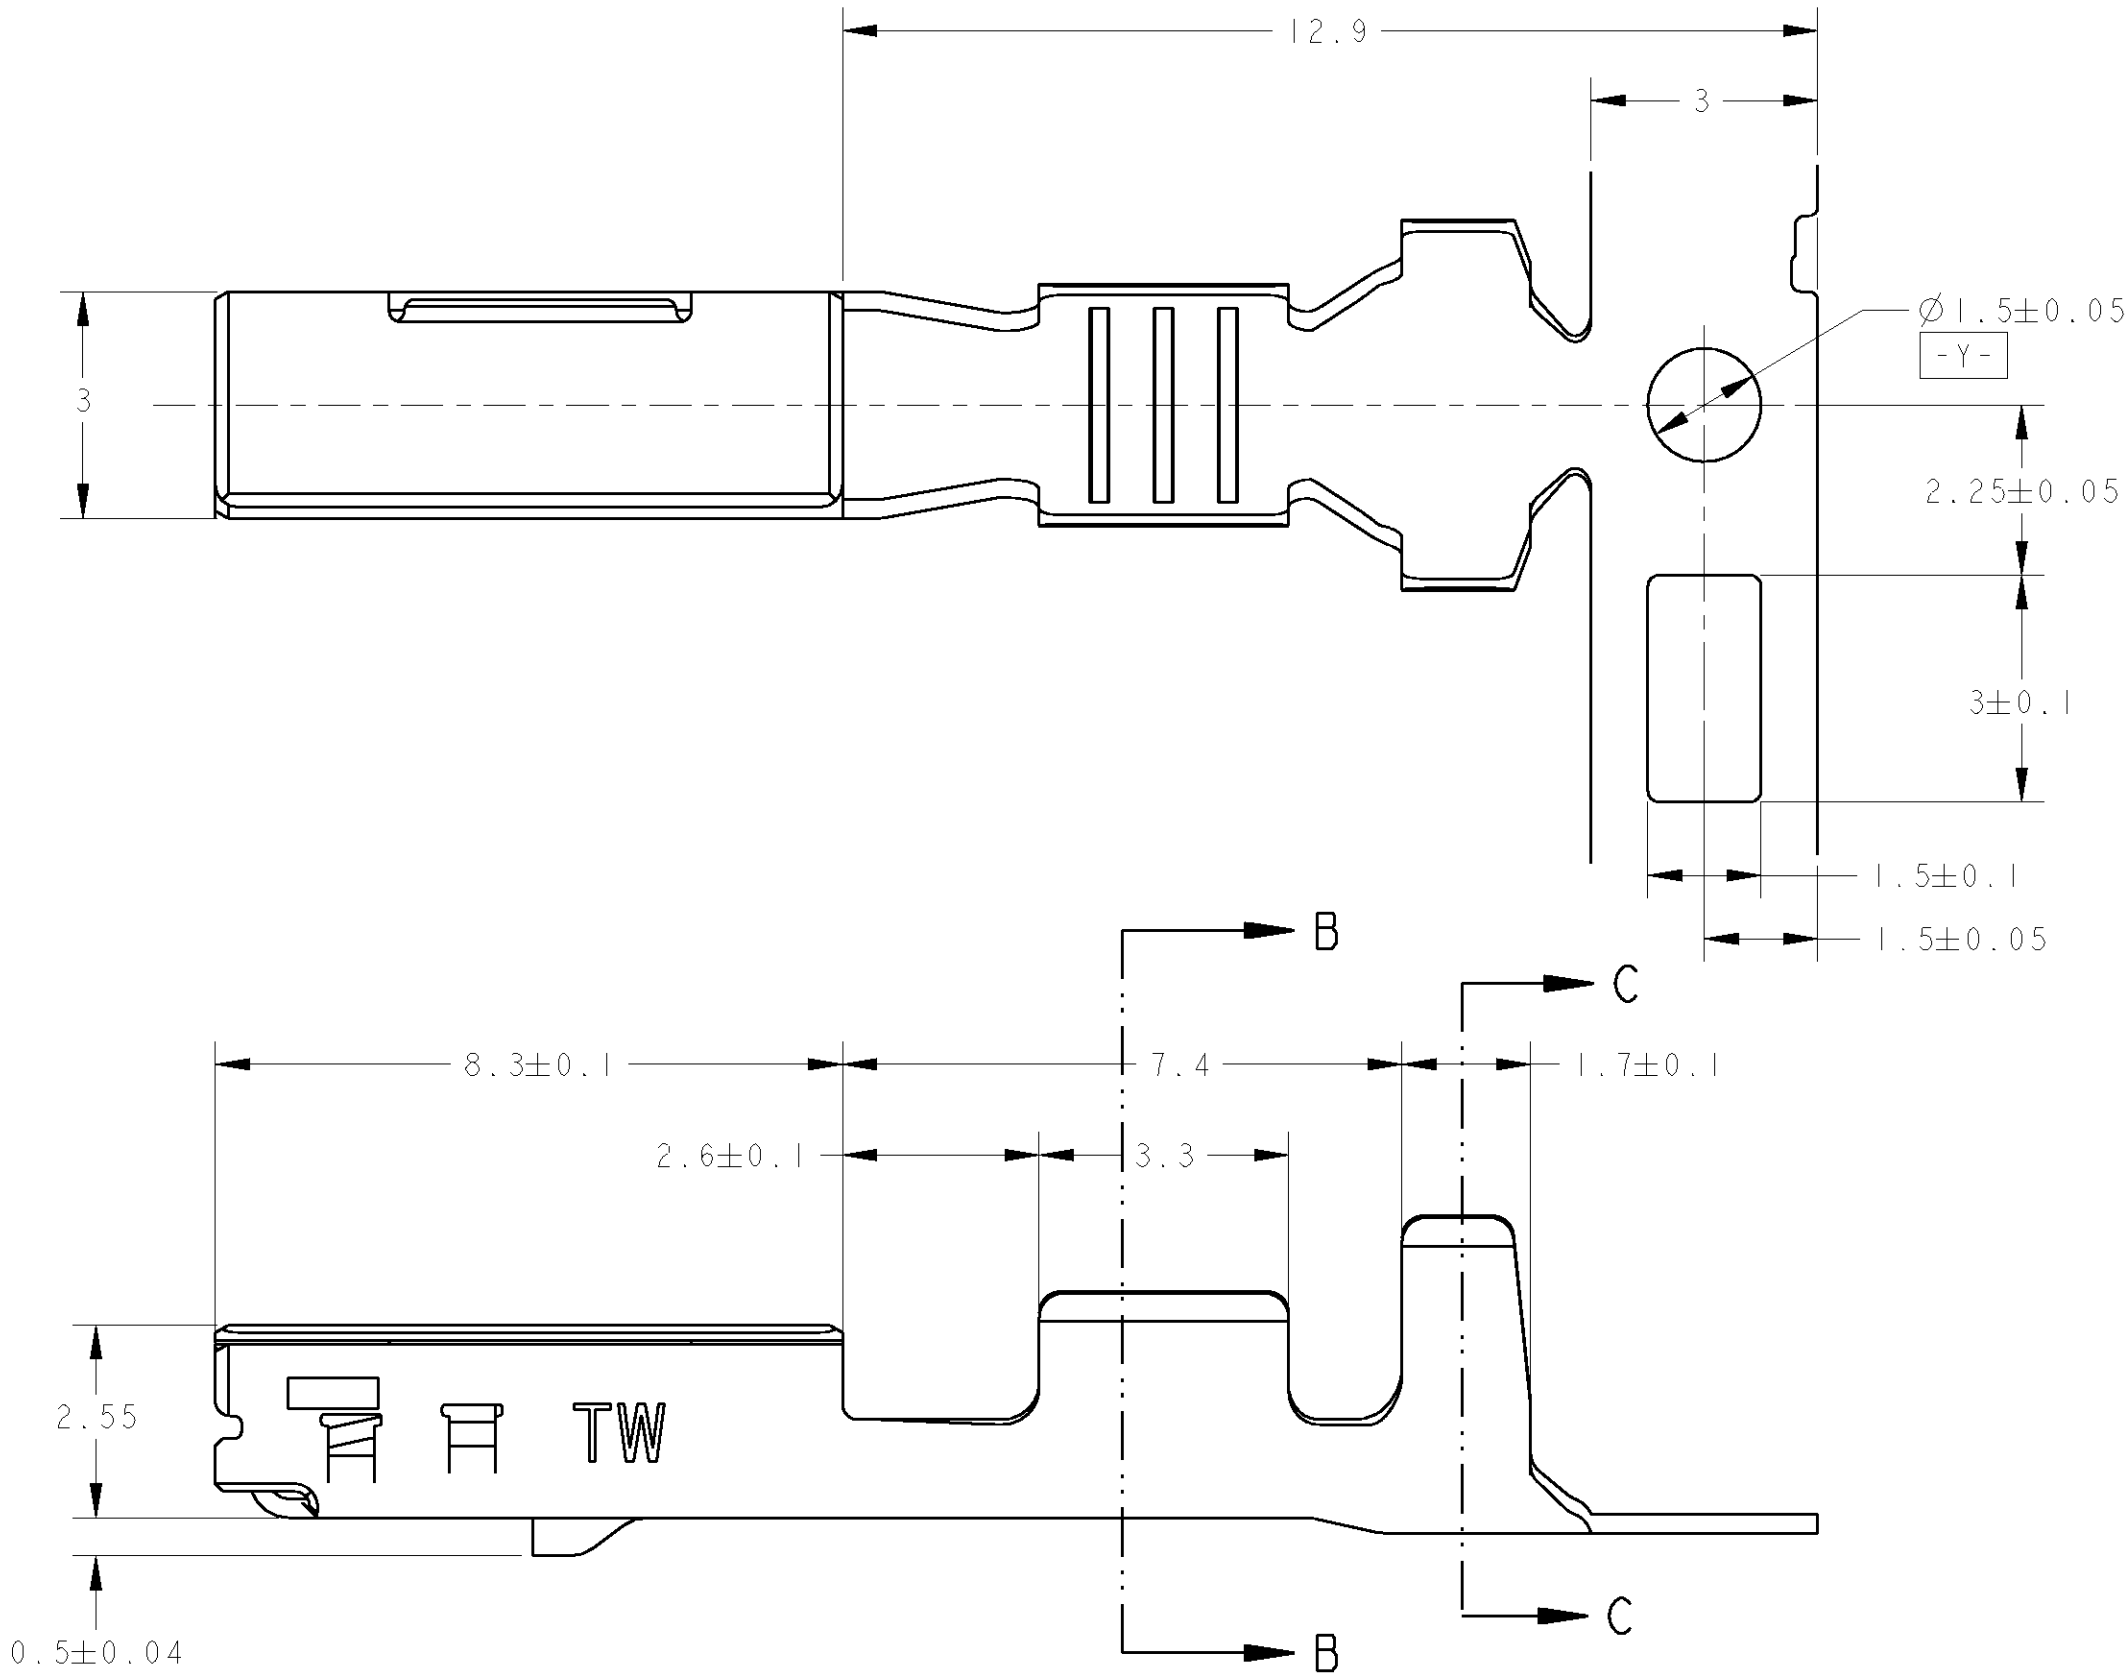

△. アプリケーター送りピッチ: 1.3mm  
表参照  
△. APPLICATOR FEED; 1.3mm  
SEE TABLE

|                                                   |           |           |
|---------------------------------------------------|-----------|-----------|
| AVS/CAVS/CAVUS 0.85~1.25<br>AVSS 0.75f, 0.85~2.0  | M         | 1981341-2 |
| AVS/CAVS/AVSS/CAVUS 0.3~0.5<br>AVX/AEX/ABAVX 0.5f | S         | 1981341-1 |
| APPLICABLE WIRE RANGE                             | SIZE MARK | PART NO   |

|                                                                                                                                                                                               |  |                                        |                                              |  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|----------------------------------------|----------------------------------------------|--|
| THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION<br>IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION<br>SHOULD BE CONTACTED FOR THE LATEST REVISION |  | DWN<br>S. FURUYA<br>26JUL2007          | Tyco Electronics AMP K.K.<br>Kawasaki, Japan |  |
| DIMENSIONS:<br>単位: 概<br>mm                                                                                                                                                                    |  | CHK<br>T. KOHNO<br>26JUL2007           | NAME<br>Y. FUJIWARA                          |  |
| TOLERANCES UNLESS<br>OTHERWISE SPECIFIED:<br>一般公差 ±0.3<br>1-PLC ±0.5<br>2-PLC ±0.13<br>3-PLC ±0.013<br>4-PLC ±0.001<br>ANGLES ±3°00'                                                          |  | APVD<br>Y. FUJIWARA<br>26JUL2007       | PRODUCT SPEC<br>108-78408                    |  |
| MATERIAL<br>材料<br>銅合金                                                                                                                                                                         |  | APPLICATION SPEC<br>取付適用規格<br>114-5411 | APPLICATOR FEED<br>0.4g                      |  |
| FINISH<br>仕上<br>PRE-TIN                                                                                                                                                                       |  | WEIGHT<br>0.4g                         | CUSTOMER DRAWING                             |  |
| SCALE<br>10.1                                                                                                                                                                                 |  | SHEET<br>1                             | REV<br>B                                     |  |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1981341-2](#)