

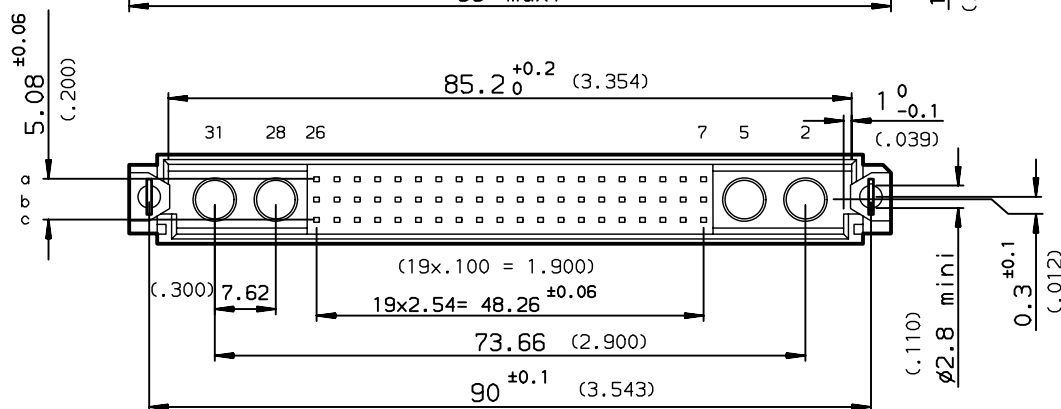


DIMENSIONS mm (inches)

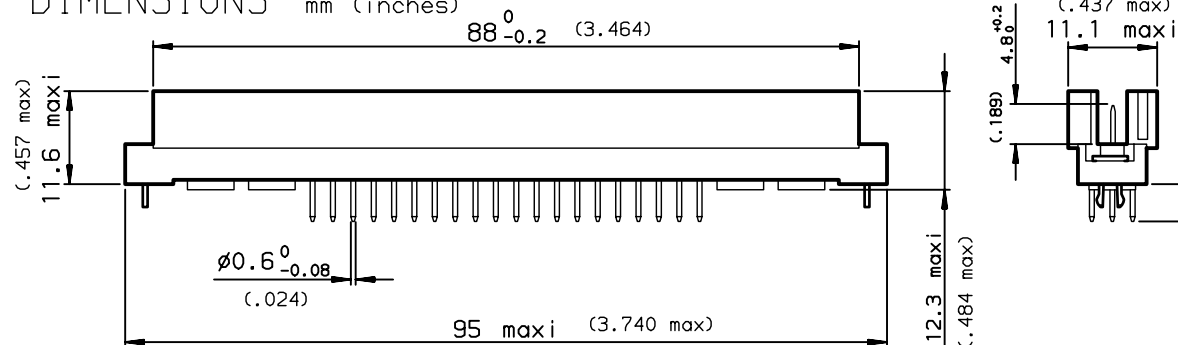

PCB DRILLING

component side

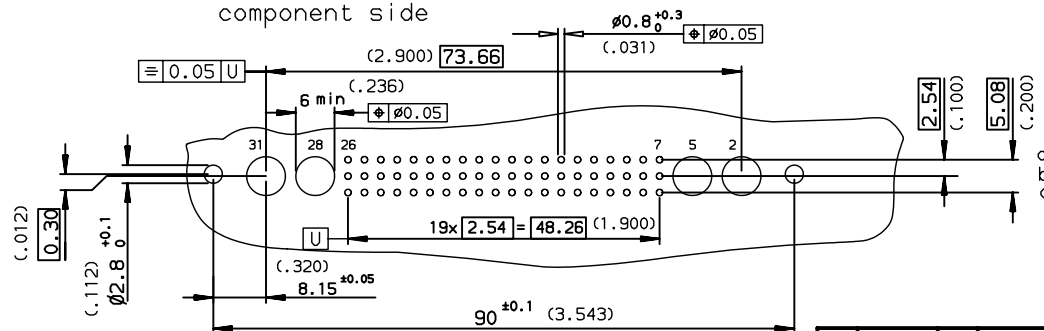

PART NUMBER		8609		C8			5	
PIN OUT								
rows a-b-c				3	60			
rows a-c				4	40			
NUMBER OF CONTACTS								
TERMINATION								
L = 2.70 ±0.25 (.106)								24
L = 4.65 ±0.25 (.183)								14
OPTIONS								
no option								7
with harpoons								H
								A
								R
PERFORMANCE CLASS								
DIN 41612 class 3								4
DIN 41612 class 2								5
DIN 41612 class 1								6
TERMINATION TYPE								
TIN LEAD								000E1
LEAD FREE								E1LF

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C-8609-0000A

European Views

www.fciconnect.com		surface	ISO 1302	tolerance std	ISO 406	ISO 1101	projection	mm
		ISO 1302	✓	ISO 406	ISO 1101			
		TOLERANCES UNLESS OTHERWISE SPECIFIED						
Dr	ROUILLARD	1996/02/22	ANGULAR	LINEAR	0.X	±0.1	size	Scale
Eng	TARON	1996/02/22	0.XX	±0.1	0.XX	±0.1	A3	1.5
Chr	LEGARE	1996/02/22	0.XX' ±2'	0.XXX	±0.1		ECN	LS06-0095
Appr	LEGARE	1996/02/22	Product family		DIN 8609		Spec ref -	
FCI		STRAIGHT MALE WITH SPECIAL CONTACTS				C-8609-0507		Rev.
		SOLDER TO BOARD						C
catalog no						CUSTOMER		sheet 1 of 1

rev	ecn no	dr	date
A	-	-	1996/02/22
B	LS05-001	JTA	2005/03/01
C	LS06-0095	LGO	2006/07/12
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[8609360C814755E1LF](#)