




1 2 3 4 5 6

PRODUCT NO.	WIRE BARREL			INSULATION BRL.		AWG RANGE	BODY PLATING	SPRING PLATING	MATERIAL	
	A	B	C	D	E					
75369-003LF	2.64	2.64	0.53	3.53	3.05	1.27	18-20	1.0 μm GOLD	2.0 μm GOLD	1/4 HD BRASS

FOR LEAD FREE IDENTIFICATION.
SEE NOTES

JUMBO PV DISCRETE CONTACT		
WIRE SIZE AWG	CRIMP HEIGHT	INSULATION DIA.
18-20	1.07-1.12	1.07-2.62
22-26	0.81-0.86	0.91-2.62
28-32	0.66-0.71	0.71-1.37


RECOMMENDED WIRE
STRIP LENGTH: 3.81 ± 0.25

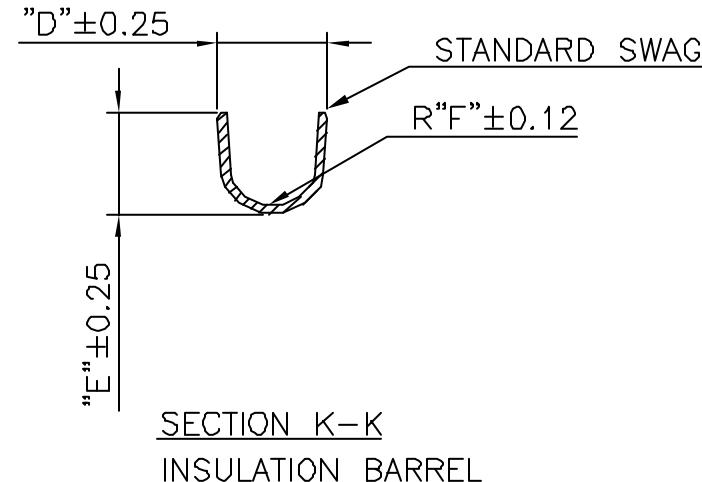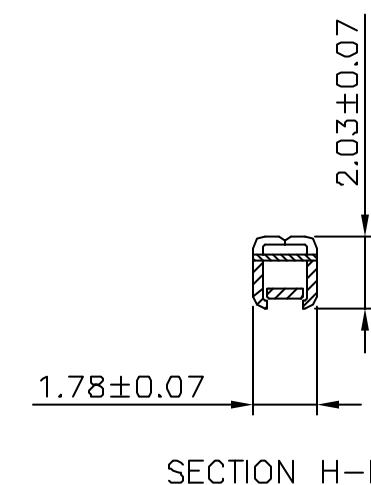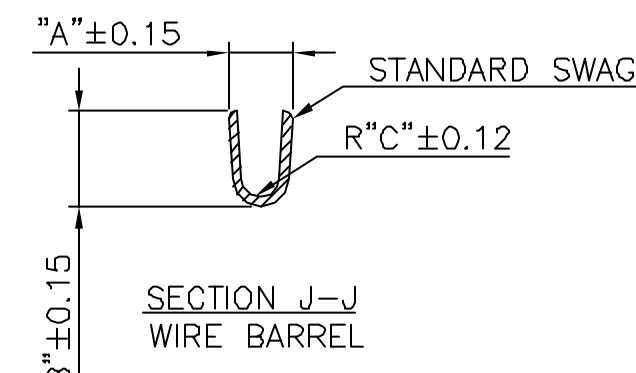

5- RoHS COMPATIBLE PRODUCT SPECIFICATIONS

- a - LABELING:
 - MEETS PACKAGING SPECS AS PER GS-14-920
- b - LEGAL STATEMENT: SEE GS-22-008

THE PRODUCT IS NOT INTENDED TO BE EXPOSED TO A MANUFACTURING SOLDER PROCESS.

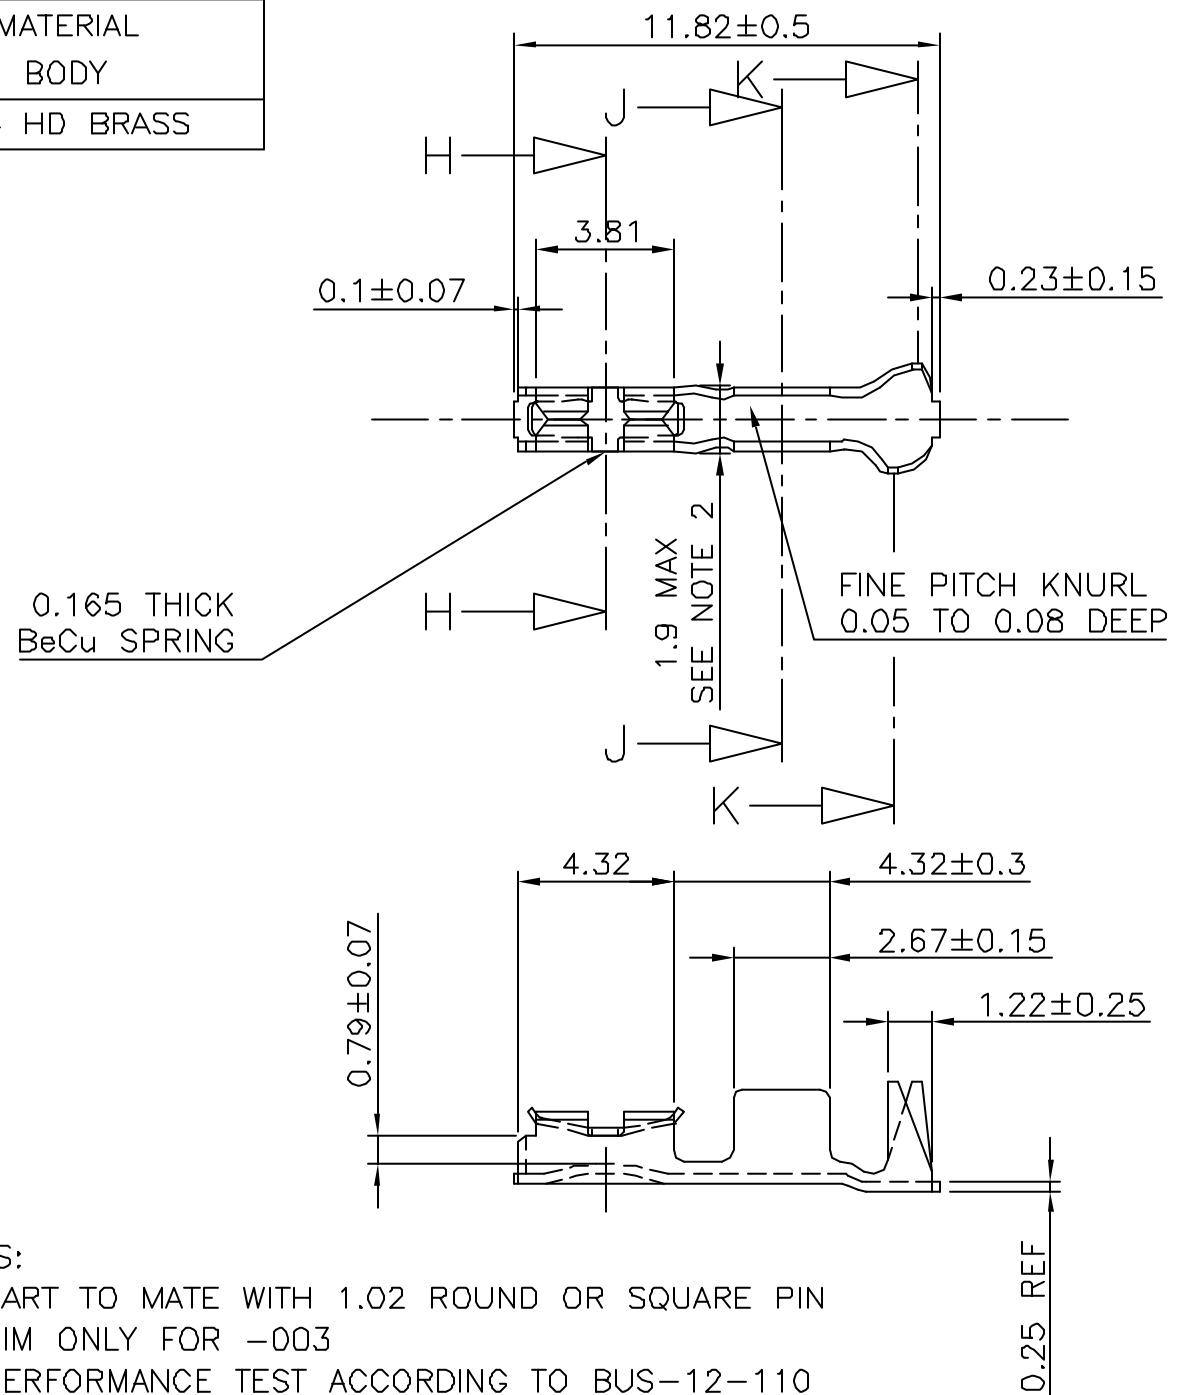

NOTES:

- 1- PART TO MATE WITH 1.02 ROUND OR SQUARE PIN
- 2- DIM ONLY FOR -003
- 3- PERFORMANCE TEST ACCORDING TO BUS-12-110
- 4- 75369-XXXLF IS SIMILAR TO 75369-XXX, THE SUFFIX 'LF' IS ADDED FOR LEAD FREE IDENTIFICATION.

mat'l. code SEE DRAWING				surface	tolerance	projection	product family
ltr	ecn no	dr	date	tolerances unless otherwise specified		101	BERGCON
K	6986	AD0	86.05.21	angles	±13	mm	title JUMBO P.V. ASSEMBLY
L	F90399	DLE	99.07.20	linear		scale 10:1	
M	F90611	DLE	99.08.02	±2°			
N	F00427	DLE	00.05.29	dr	D LEGRAND	99.07.20	dwg no 75369 size A3 type CUSTOMER Drawing
P	F05-0235	DLE	05.08.25	engr	AESCHBACHER	99.07.20	
R	F05-0286	DLE	05.11.07	chr	COMPAGNON	99.07.20	
S	F06-0217	DLE	06.07.11	appd	MAE	99.07.20	
				sheet	revision		
				index	sheet		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[75369-003LF](#)