
## UNCONTROLLED DOCUMENT


	PART NUMBER	
LCD-	-S401C39TF	?

ı	IVE V
	В

REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
Α	E.C.N. #10982.	4.16.03
В	E.C.N. #11148.	02.08.07

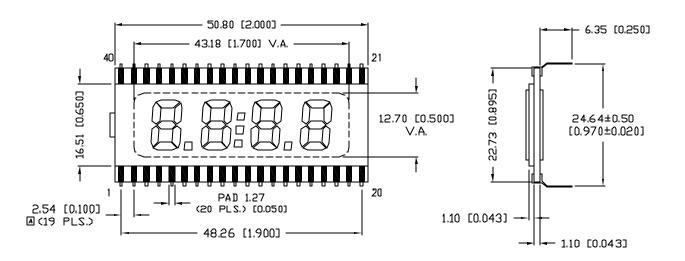

CHARACTERISTICS	
FLUID TYPE;	TN
BACKGROUND COLOR:	GRAY
VIEWING DIRECTION:	6:00
DISPLAY MODE:	REFLECTIVE
OPERATING VOLTAGE:	5V A.C.
OPERATING TEMP.	отс то 50°С
STORAGE TEMP.	−20°C TO 70°C
DRIVING METHODE:	STATIC
CONNECTION TYPE:	40 PINS



PIN NO.	1	2	3	4	5	6	7	8	9	10
SEGMENT	СОМ	N/C	y N	N/C	1E	1D	10	DP1	2E	2D
PIN NO.	11	12	13	14	15	1Б	17	18	19	20
SEGMENT	2C	DP2	3E	3D	3C	DP3	4E	4D	4C	48
PIN NO.	21	22	23	24	25	26	27	28	29	30
SEGMENT	4A	4F	4G	3B	3A	3F	3G	COL	ZB	2A
PIN NO.	31	32	33	34	35	36	37	38	39	40
SEGMENT	2F	2G	N/C	18	1A	1F	1G	N/C	N/C	COM



REPLACES PART #: LCD-S39C401TR

\*UNILESS DTHERMISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). NIN= +0ECIMAL PRECISION WAX.= +0.DD -0.000

UNCONTROLLED DOCUMENT

(+0.002) | FAD | FANTH=+0.75 (+0.030) | MIN= +DECMAL PRECISION | MAY = +0.00

B LCD-S401C39TR

0.39" CHARACTER HEIGHT, FOUR DIGIT LCD GLASS,
TN, REFLECTIVE, 40 PINS.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX NO. EXCEPT AS SPECIFICALLY AUTHORIZED IN WIRTING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMNATION TO ALL THRO PARTIES.

RELIABILITY NOTE

Our many years of experience data accumulation indicate that solder heat is a major cause of early and future failure. Please pay attention to your soldering process.



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 US WEB: www.lumex.com ITW WEB: www.lumex.com.tw

DRAWN BY:

JC

CHECKED BY:

APPROVED BY: DATE: 11.19.98

PAGE: 1 OF 1 SCALE: N/A

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

LCD-S401C39TR