


Product data sheet

Characteristics

XZCPA1965L10

pre-wired connectors XZ - elbowed female - 1/2"20 UNF - 3 pins - cable PVC 10m

Product availability: Non-Stock - Not normally stocked in distribution facility

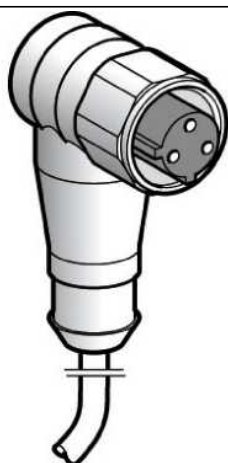

Main

Commercial Status	Commercialised
Accessory / separate part category	Cabling accessories
Accessory / separate part type	Pre-wired connectors
Series name	Application
Electrical connection	Elbowed female connector 1/2"20 UNF, 3 pins
Collar material	Stainless steel 316L
Status LED	Without
Cable length	32.81 ft (10 m)

Complementary

Cable connector fixing	Screw-on
Cable outer diameter	0.2 in (5 mm)
Cable composition	3 x 0.34 mm ²
Wire insulation material	PVC
[Ue] rated operational voltage	300 V DC 250 V AC
[In] rated current	4 A
Contact resistance	<= 5000 µOhm
Insulating resistance	>= 1 GΩ
Product weight	0.77 lb(US) (0.35 kg)

Environment

IP degree of protection	IP69 K
Ambient air temperature for operation	-13...185 °F (-25...85 °C) (static)
Ambient air temperature for storage	-31...212 °F (-35...100 °C)

Ordering and shipping details

Category	22483 - MACHINE CABLES
Discount Schedule	DS3
GTIN	003389119021647
Nbr. of units in pkg.	1
Package weight(Lbs)	0.80
Product availability	Non-Stock - Not normally stocked in distribution facility
Returnability	N
Country of origin	DE

Offer Sustainability

Sustainable offer status	Not Green Premium product
RoHS	Compliant - since 0601 - Schneider Electric declaration of conformity

Contractual warranty

Period	18 months
--------	-----------

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Schneider Electric:](#)

[XZCPA1965L10](#)