

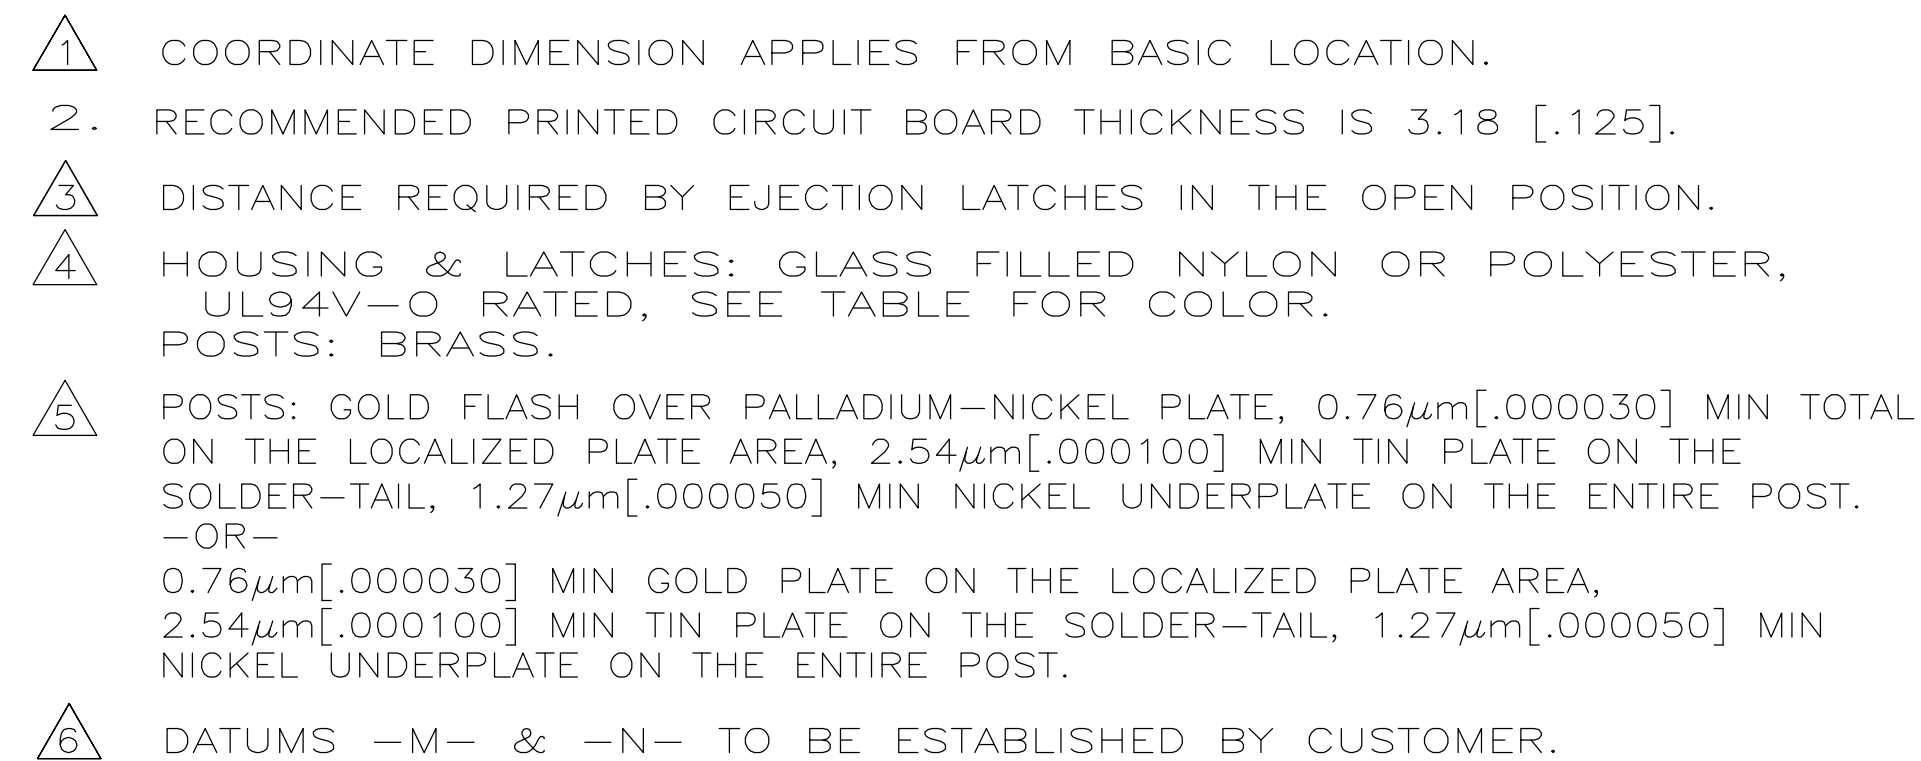


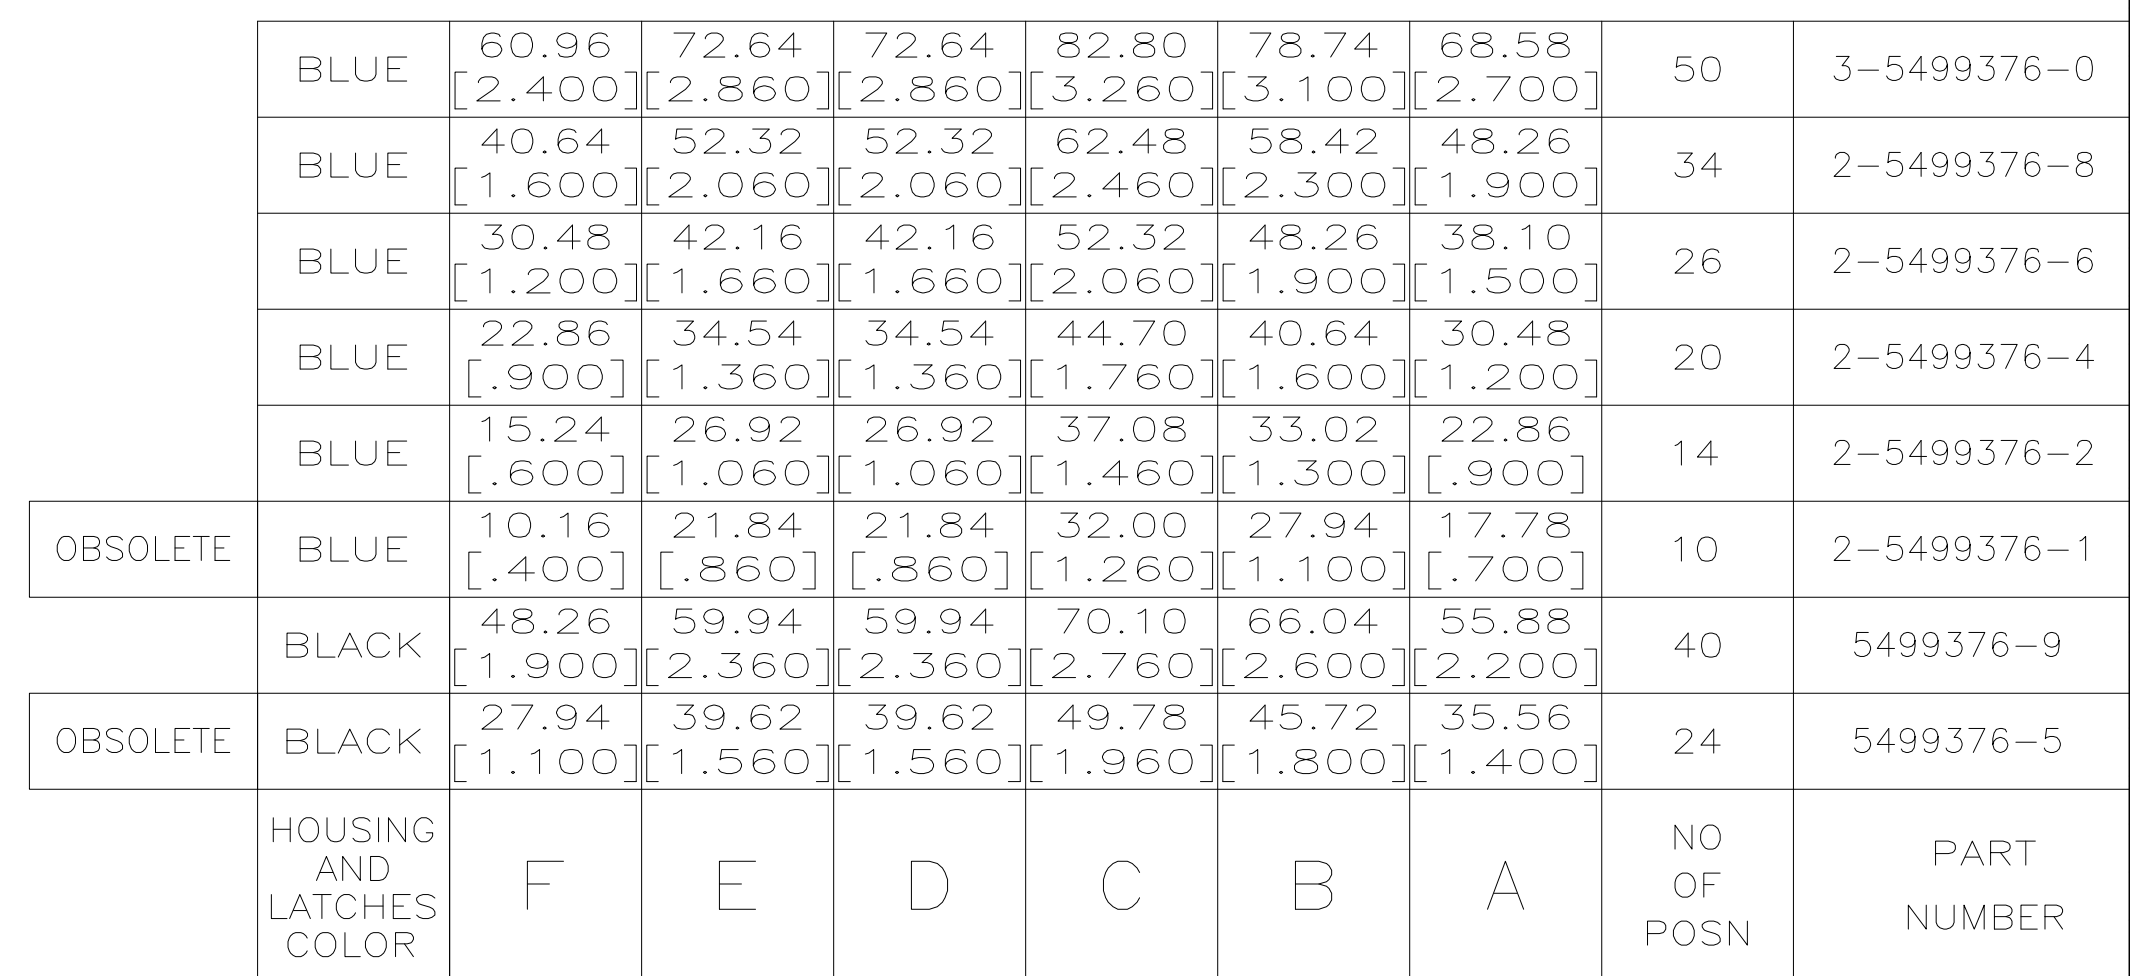


Technical drawing of the front view of a 24-pin D-sub connector housing. The drawing shows a symmetrical housing with 24 pins (12 on each side) and 24 positions (12 on each side). Dimensions are given in inches and millimeters. Key features include:

- 24 pins with a diameter of 0.050 inches (1.27 mm) and a length of 0.190 inches (4.83 mm).
- Housing with a total width of 0.25 inches (6.35 mm) and a total height of 0.25 inches (6.35 mm).
- Pin pitch of 0.100 inches (2.54 mm).
- Pin spacing of 0.165 inches (4.19 mm).
- Pin diameter of 0.150 inches (3.81 mm).
- Housing with a 0.050 inch (1.27 mm) diameter hole for mounting.

The drawing is labeled "24-PIN D-SUB CONNECTOR HOUSING" and "24-PLC".

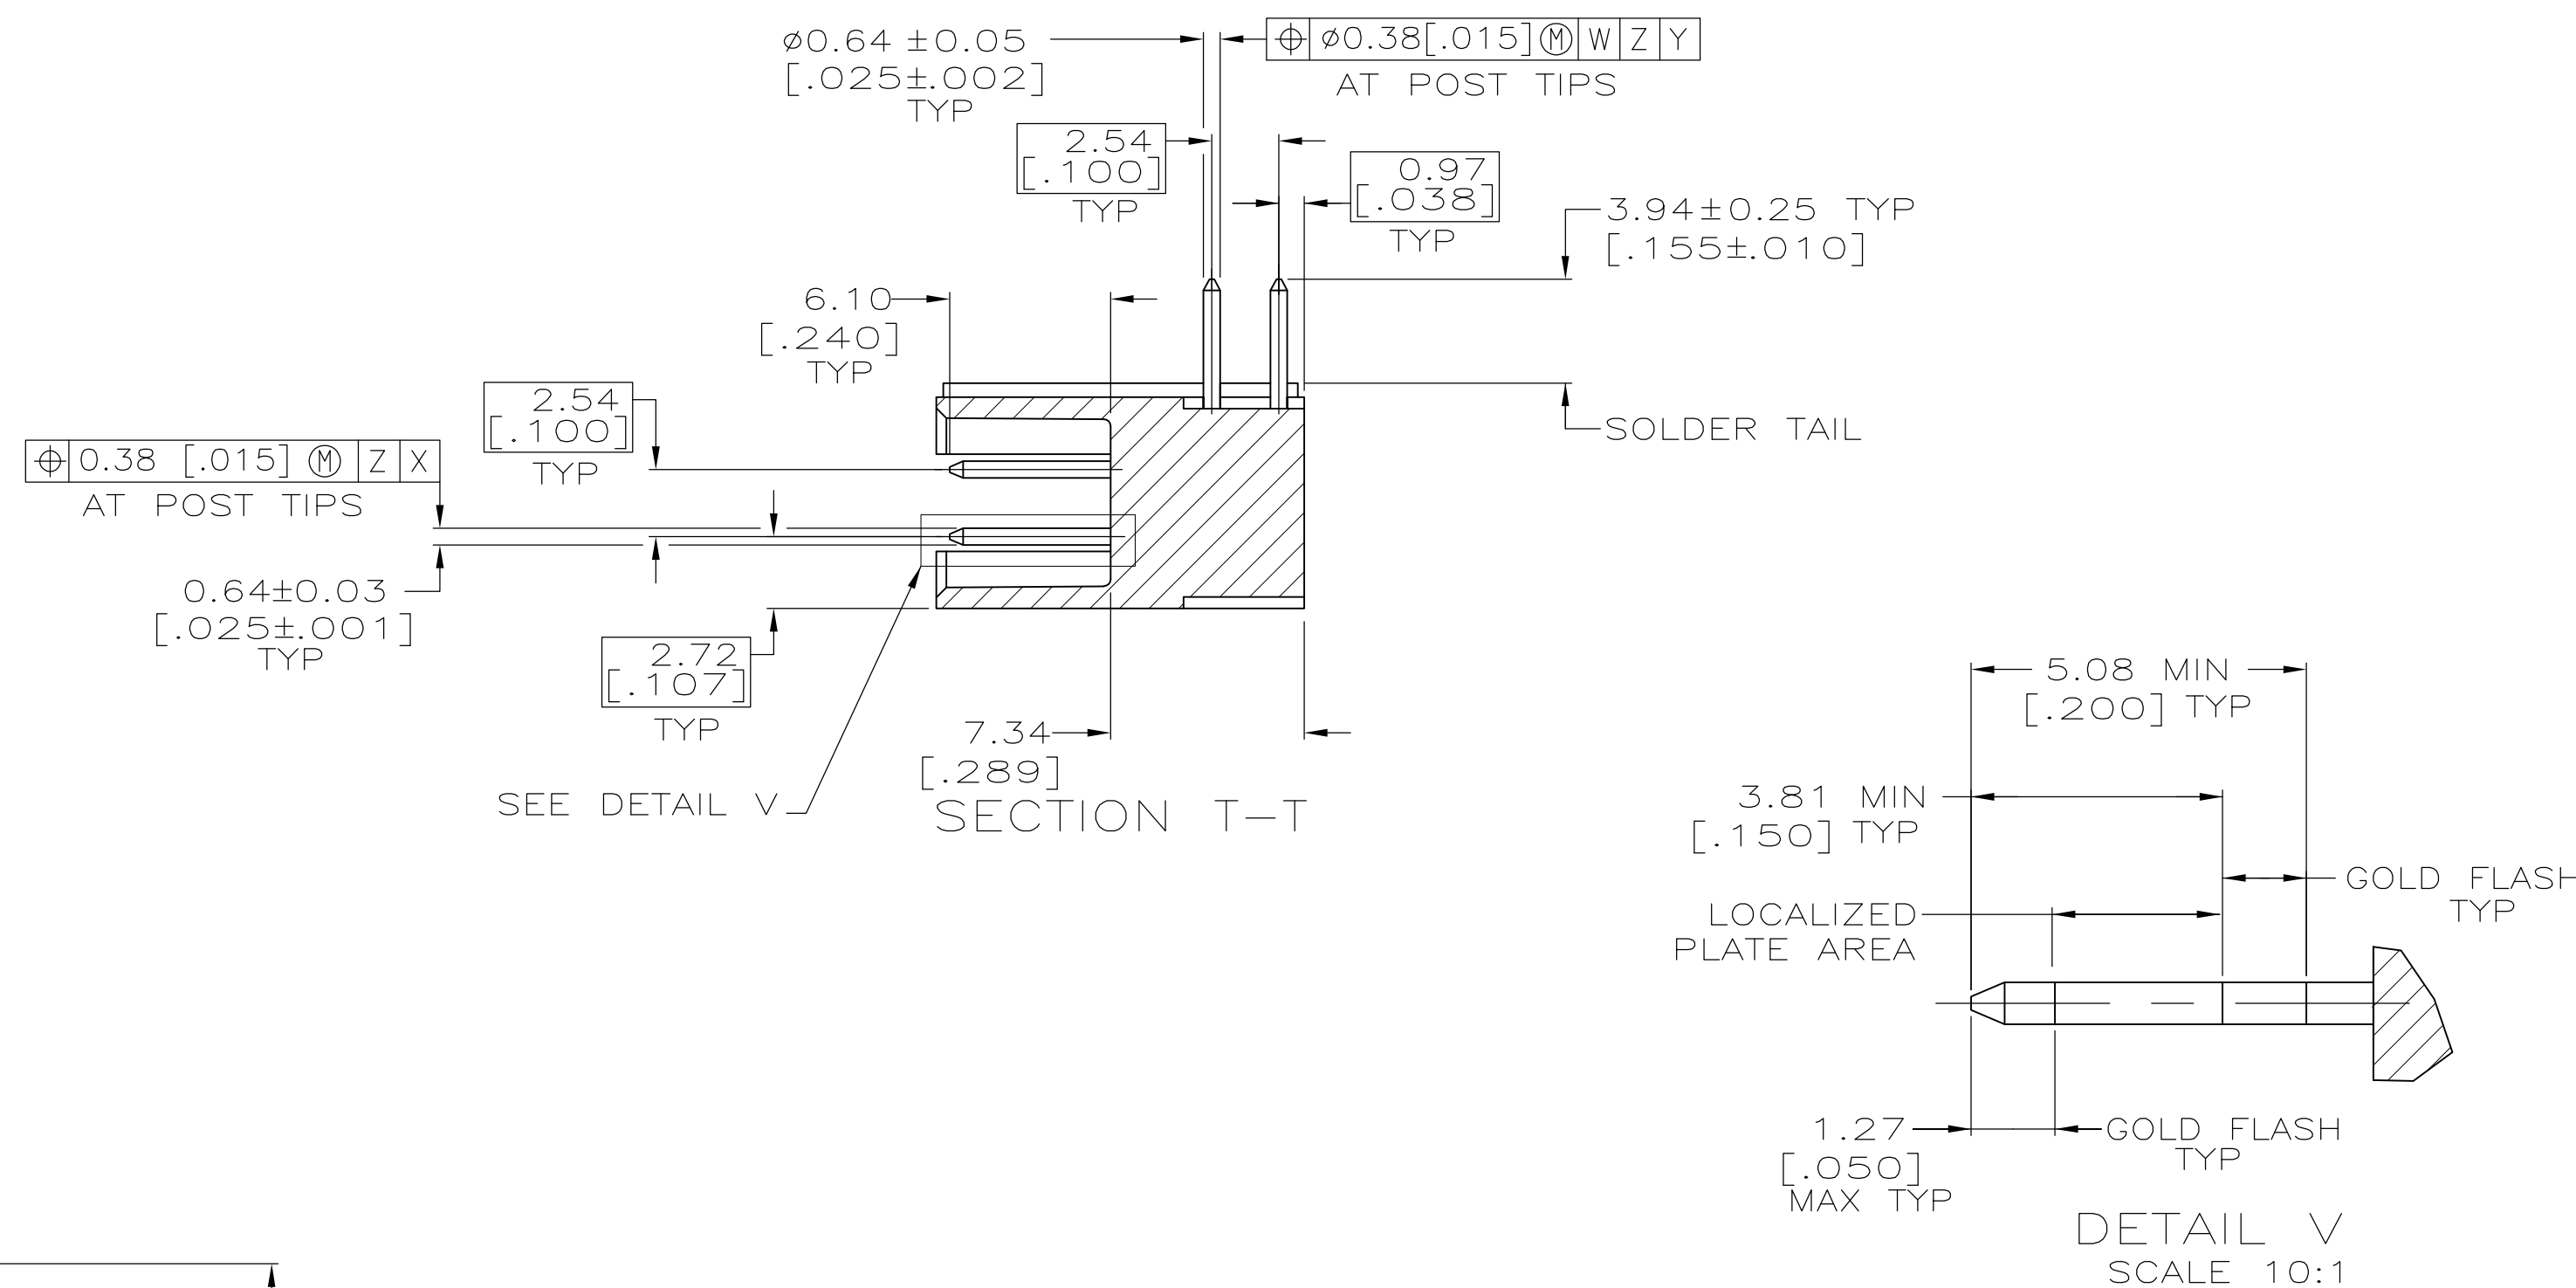

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 01-07-05 L. VARELA - DOCKS CHK 01-07-05 C. BOLASH APD M. WALMSLEY 01-07-05		 Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: mm/in [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0. PLC ± 1. PLC ± 2. PLC ± 0.1% [.005] 3. PLC ± 14. PLC ± ANGLES ± ±		NAME HEADER ASSY, UNIVERSAL, AMP-LATCH -	
		PRODUCT SPEC 108-40018 APPLICATION SPEC -		SIZE A1	
MATERIAL 		FINISH 		DRAWING NO 00779 C5499376	
		WEIGHT -		RESTRICTED TO -	
		CUSTOMER DRAWING		SCALE 4:1 SHEET 1 OF 1 REV F	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-5499376-8](#)