

THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.		



LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			A2	ECR-11-006336	28MAR2011	RL	SL

NOTES:

1. TEST REQUIREMENT:
ELECTRICAL TESTING, 100% CONTINUITY AND SHORT CIRCUIT INSULATION TEST.

2 CABLE CODING IS ACCORDING TO T568B

3 FINISH: 1.27 μ MIN. GOLD PLATED IN CONTACT AREA,
ALL OVER 1.27 μ MINIMUM NICKEL UNDERPLATE

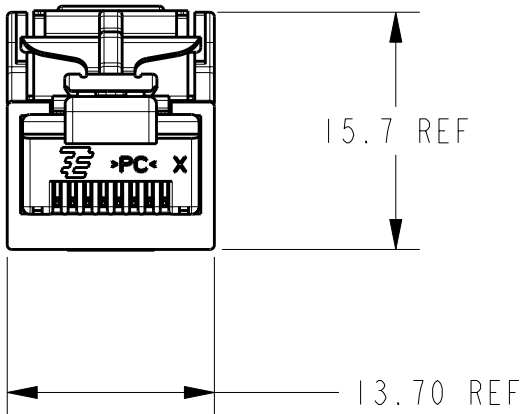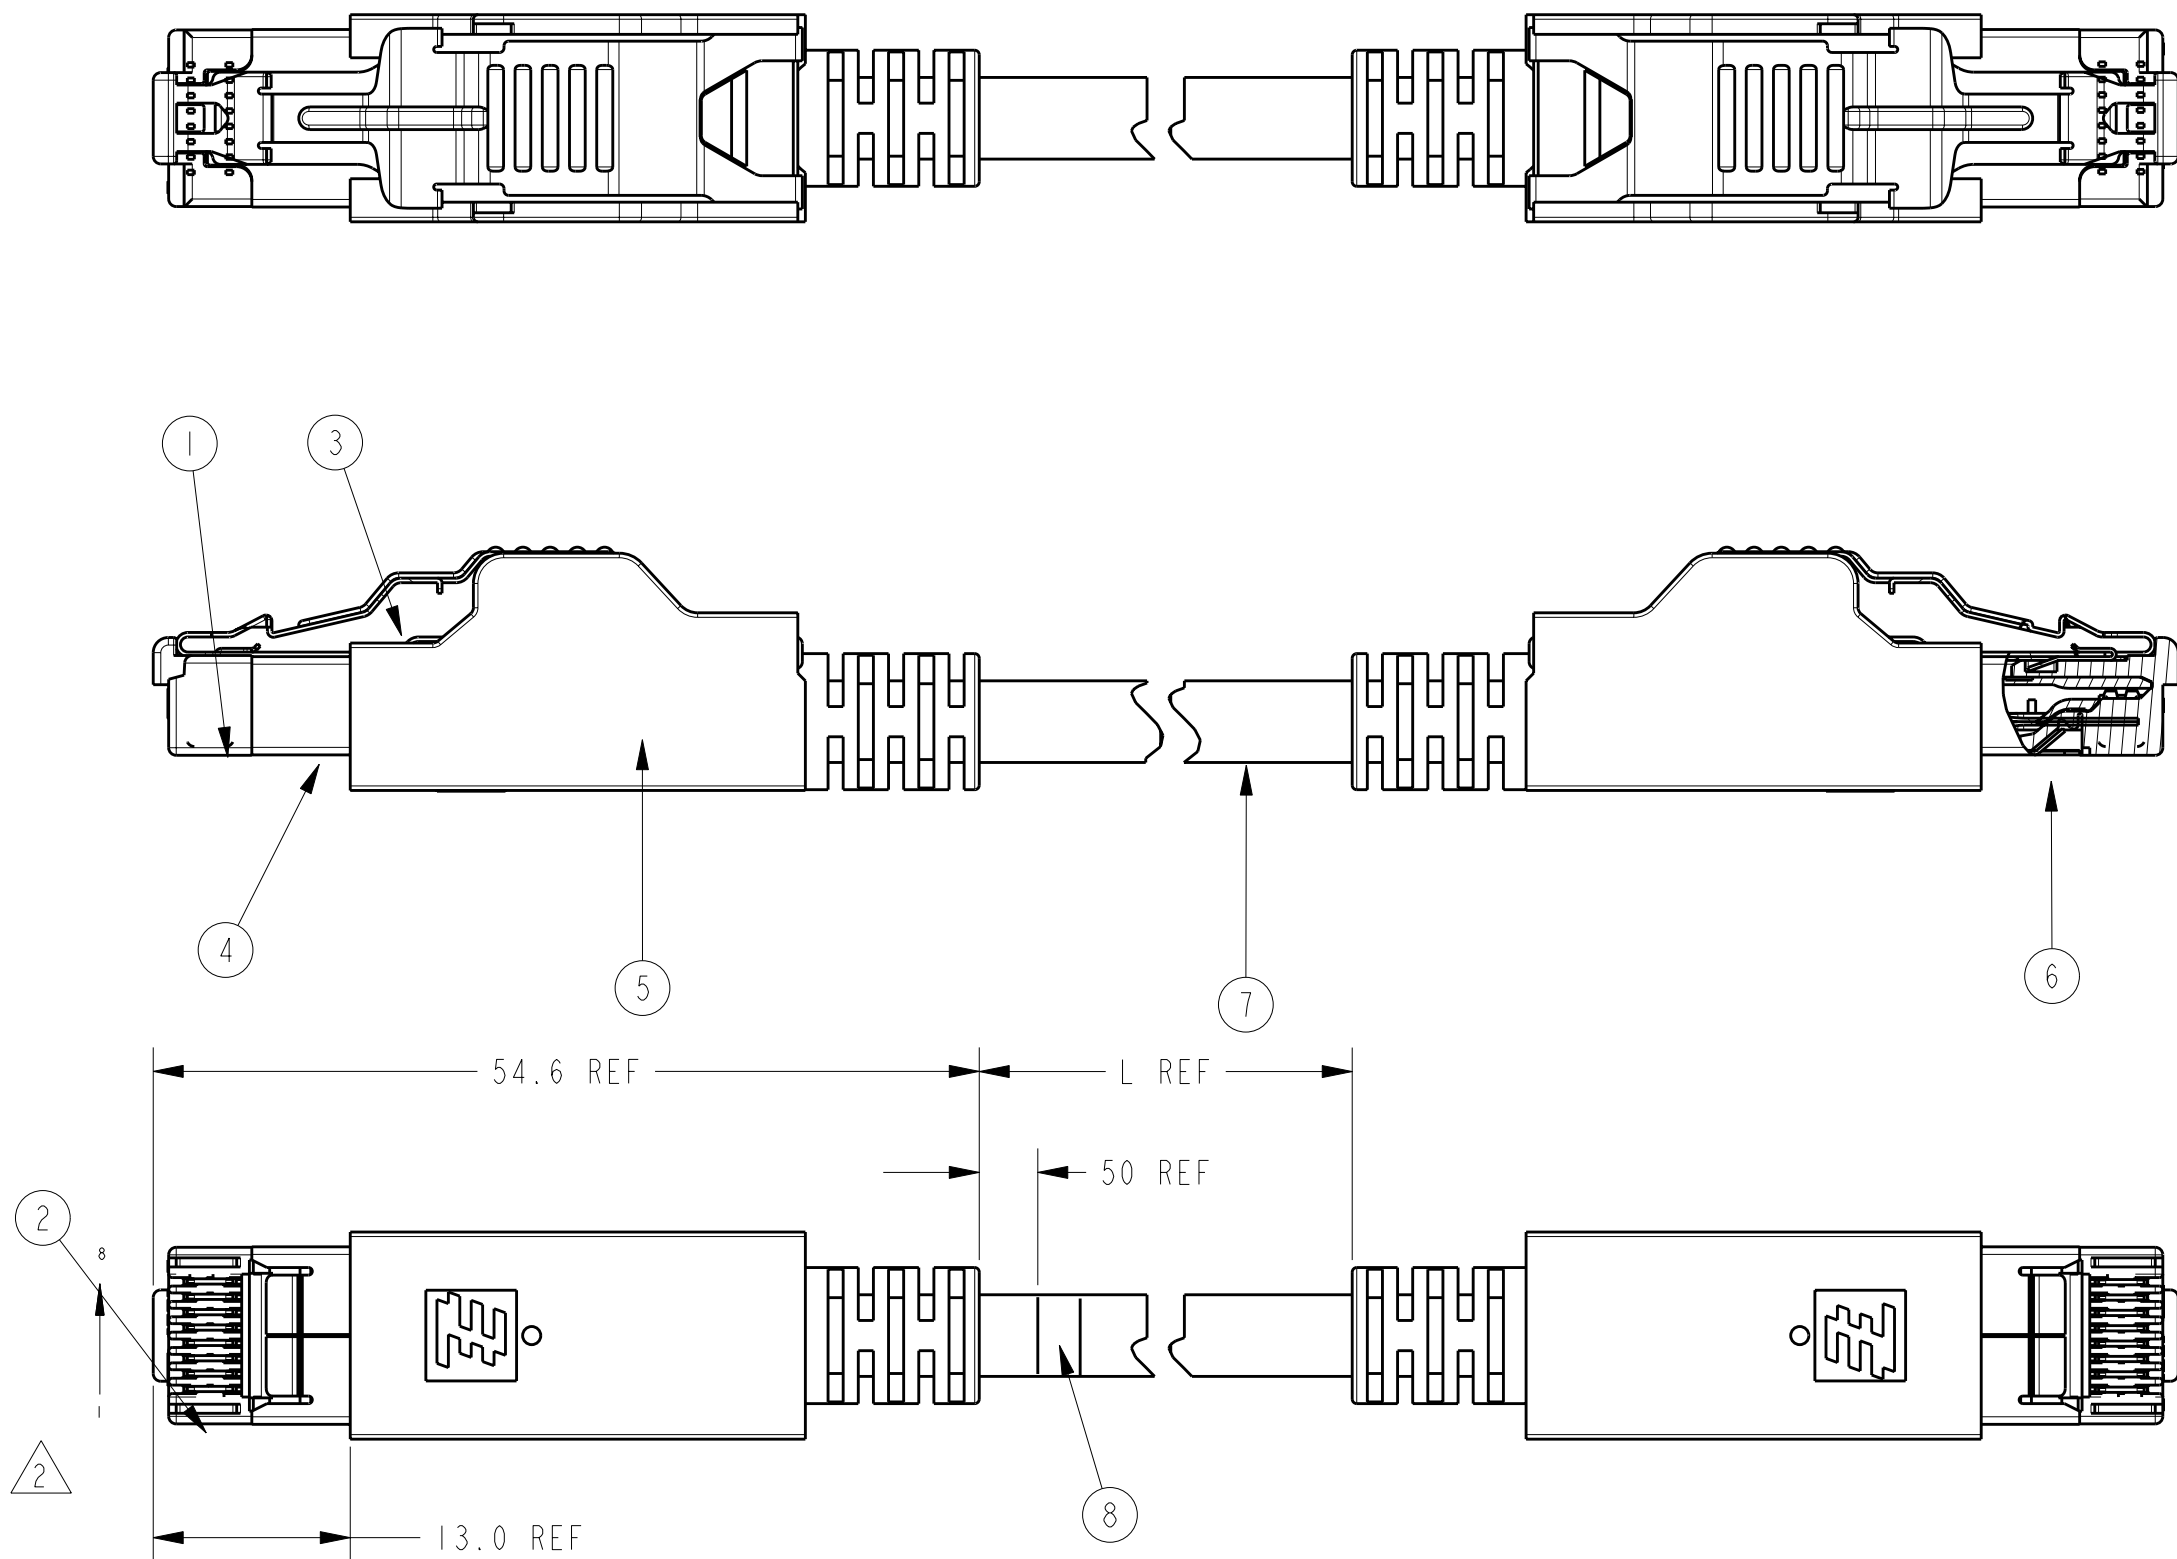

8	I	I	I	I	I	I	PC	LABEL FOR CABLE	
7	30M	20M	10M	5M	1.5M	2M	L	ETHERNET CABLE	CAT5e SHIELDED CABLE,26AWG, STRANDED WIRE
6	2	2	2	2	2	2	PC	WIRE HOLDER FOR MODULAR PLUG	POLYCARBONATE UL94 V0
5	AR	AR	AR	AR	AR	AR	KG	OVERMOLDING HOUSING	PP,BLACK
4	2	2	2	2	2	2	PC	SHIELD FOR MODULAR PLUG	STAINLESS STEEL
3	2	2	2	2	2	2	PC	LOCK SPRING	STAINLESS STEEL
2	16	16	16	16	16	16	PC	CONTACT FOR MODULAR PLUG	COPPER ALLOY 
1	2	2	2	2	2	2	PC	HOUSING FOR MODULAR PLUG	POLYCARBONATE UL94 V0
ITEM NO	-6 QTY	-5 QTY	-4 QTY	-3 QTY	-2 QTY	-1 QTY	U/M	DESCRIPTION	MATERIAL

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 19NOV2009 CHERRY CHENG CHK 19NOV2009 ROCK LV APVD 19NOV2009 JULIAN ZHOU		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED 0 PLC $\pm$.5 1 PLC $\pm$.5 2 PLC $\pm$.13 3 PLC $\pm$ 0.013 4 PLC $\pm$ 0.0001 ANGLES $\pm$.1 FINISH		NAME ROBUST RJ45 CABLE ASSEMBLY INDUSTRIAL ETHERNET	
		PRODUCT SPEC 108-106053 APPLICATION SPEC - WEIGHT -		SIZE A2	
MATERIAL -				CAGE CODE 00779	
		CUSTOMER DRAWING		DRAWING NO C-1983523	
				RESTRICTED TO -	
				SCALE 2:1 SHEET 1 OF 1 REV A2	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1983523-2](#)