


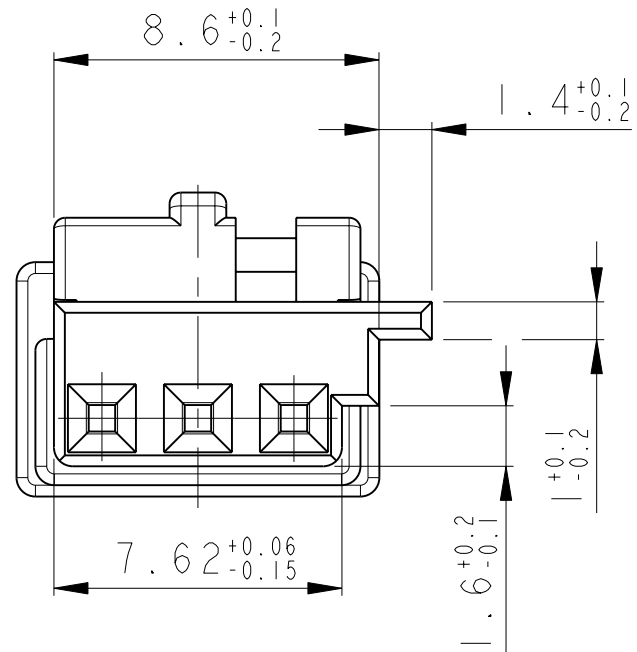

1 Massgebend ist der deutsche Text
ONLY THE GERMAN-LANGUAGE VERSION SHALL BE BINDING

2 Passend fuer Leitungsquerschnitt: 0.2-0.75mm²
SUITABLE FOR WIRE SIZE RANGE

3 Passend zu Buchsenkontakt siehe Zeichnung: TE: 929454
SUITABLE FOR SOCKET CONTACT SEE DRAWING:

4 Kragenanschluss siehe Zeichnung: TE: 114-18063-18
SHROUDED CONNECTION SEE DRAWING:







5 Anlieferungszustand: 2. Kontaktsicherung in Vorraststellung
CONDITION AS DELIVERY: RETAINER IN PRE-LOCKED POSITION

6 Formteilungsgrat max 0.2 zulaessig
BURRS MAX 0.2 PERMITTED

7 Mittig ueber Nennmass
CENTRIC TO NOMINAL DIMENSION DIN 16901-140

8 Einzelheiten der Ausfuehrung bleiben dem Hersteller ueberlassen
DETAILS OF DESIGN ARE LEFT TO MANUFACTURER


MATERIAL: PBT-GF10
Farbe/COLOR: siehe Tabelle/SEE TABLE

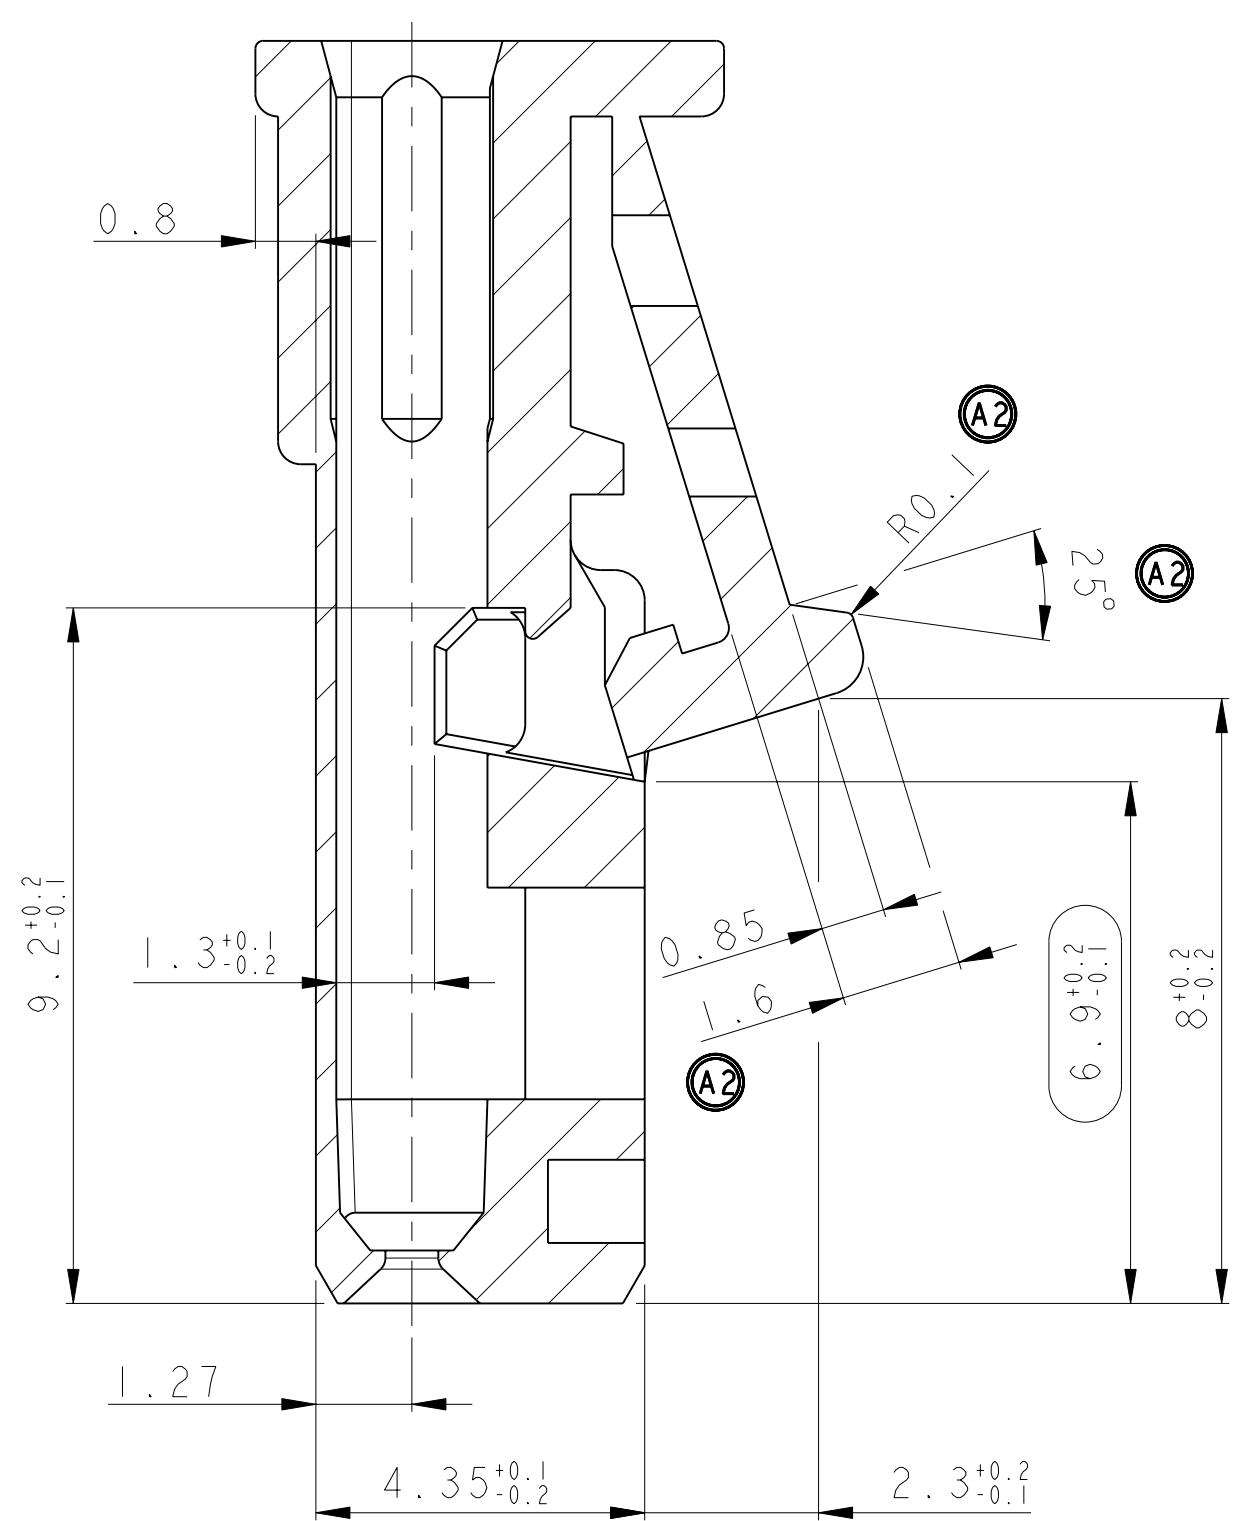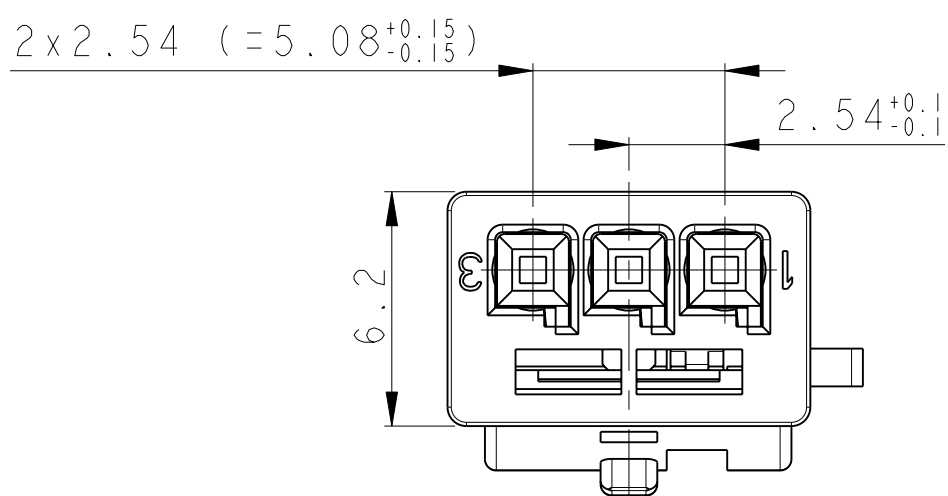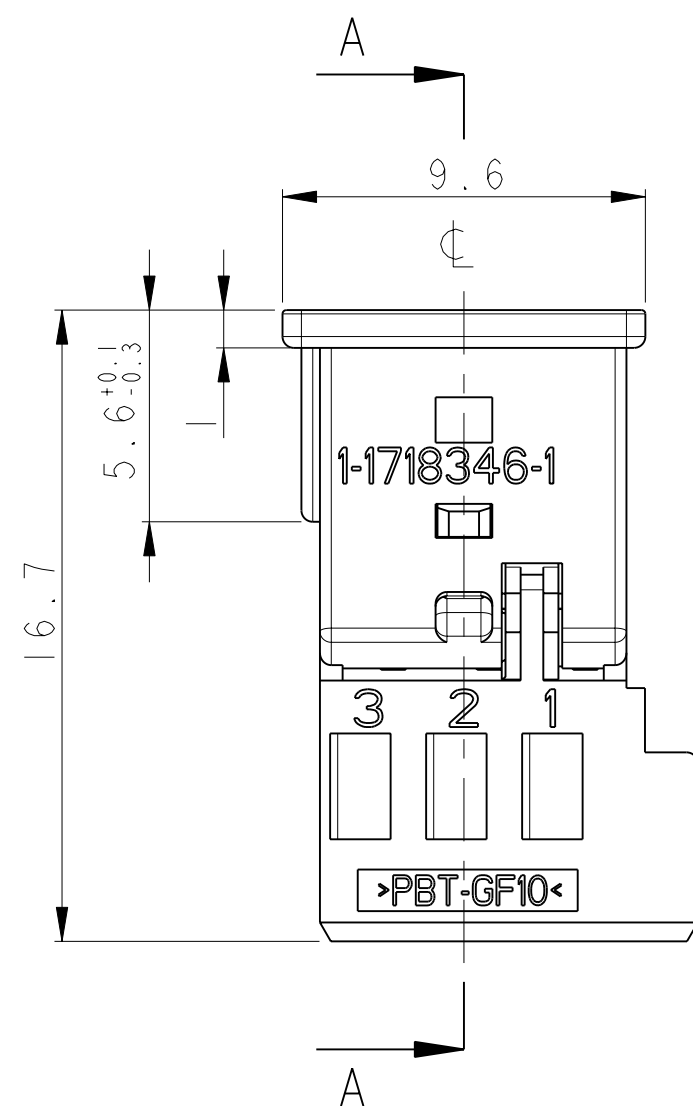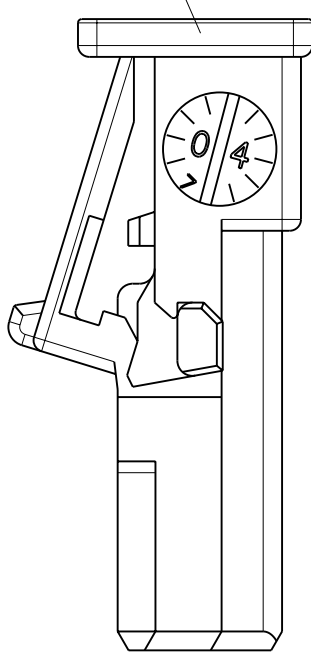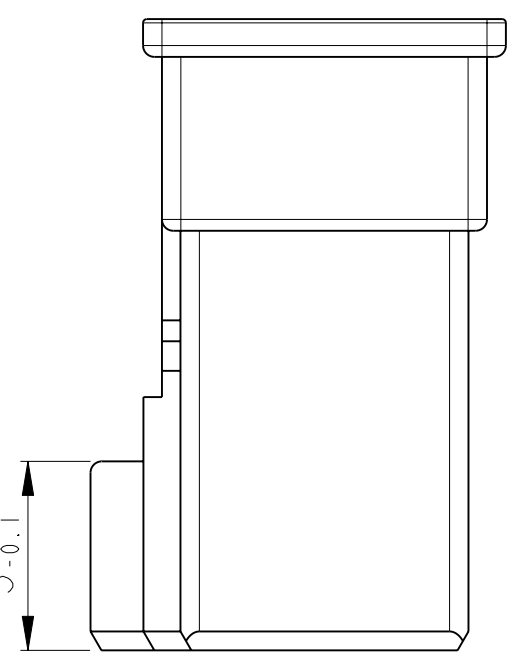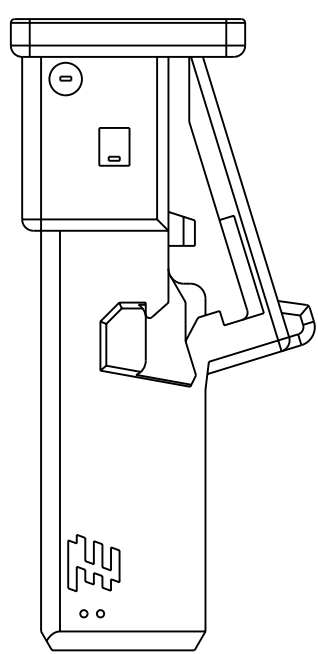


A schematic diagram of a mechanical assembly. A downward-pointing arrow labeled 'Y' indicates a force applied to the top of the assembly. The assembly consists of a base with three square-shaped components (possibly pistons or valves) mounted on it. Above the base is a complex structure with various rectangular and cylindrical components, including a central vertical element and side-mounted components.

[illegible]


A

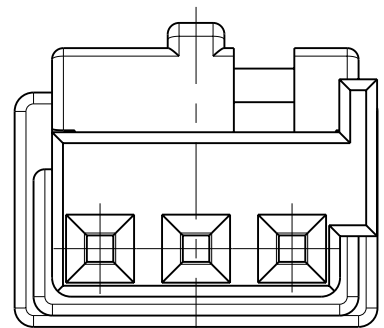

B

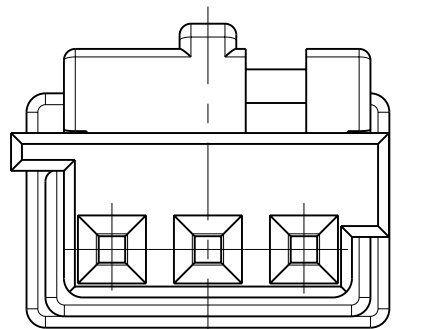


D

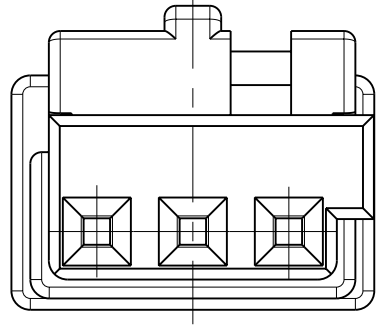
$$Z$$

22APR2010 TS BF

[illegible]

2:1



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-1718346-3](#)