


Item # 4742, D-Shaped Gaskets

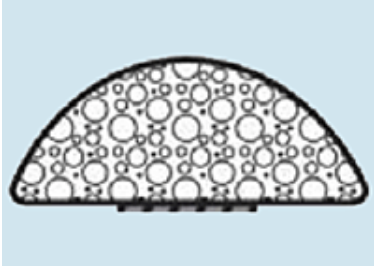

D-Shaped Gaskets

[Stock Locator](#)

Laird Technologies specializes in quick turnaround of custom shapes and sizes of EMI shielding gaskets. If you don't find exactly what you need, our engineers will help you design the right solution to your shielding problem.

A sampling for standard profiles are shown; custom configurations and sizes can be designed to meet your specific requirements.

[Stock Locator](#)

SPECIFICATIONS

Height	0.120 inches 3.0 mm																				
Width	0.150 inches 3.8 mm																				
Fabric Types	<p>Knit Mesh Ripstop Taffeta</p> <table border="1"> <thead> <tr> <th>Fabric Type</th> <th>Material</th> <th>Construction</th> <th>Application</th> <th>Benefits</th> </tr> </thead> <tbody> <tr> <td>Knit Mesh</td> <td>Nylon 6.6</td> <td>1/2" x 1/2" Mesh</td> <td>EMI & Radio Shielding</td> <td>Conductive, Flexible, Tear Resistant, Easy to Install</td> </tr> <tr> <td>Ripstop</td> <td>Nylon 6.6</td> <td>1/2" x 1/2" Mesh</td> <td>Radio Shielding</td> <td>Conductive, Flexible, Tear Resistant</td> </tr> <tr> <td>Taffeta</td> <td>Nylon 6.6</td> <td>1/2" x 1/2" Mesh</td> <td>EMI Shielding</td> <td>Conductive, Flexible, Tear Resistant</td> </tr> </tbody> </table>	Fabric Type	Material	Construction	Application	Benefits	Knit Mesh	Nylon 6.6	1/2" x 1/2" Mesh	EMI & Radio Shielding	Conductive, Flexible, Tear Resistant, Easy to Install	Ripstop	Nylon 6.6	1/2" x 1/2" Mesh	Radio Shielding	Conductive, Flexible, Tear Resistant	Taffeta	Nylon 6.6	1/2" x 1/2" Mesh	EMI Shielding	Conductive, Flexible, Tear Resistant
Fabric Type	Material	Construction	Application	Benefits																	
Knit Mesh	Nylon 6.6	1/2" x 1/2" Mesh	EMI & Radio Shielding	Conductive, Flexible, Tear Resistant, Easy to Install																	
Ripstop	Nylon 6.6	1/2" x 1/2" Mesh	Radio Shielding	Conductive, Flexible, Tear Resistant																	
Taffeta	Nylon 6.6	1/2" x 1/2" Mesh	EMI Shielding	Conductive, Flexible, Tear Resistant																	
Pressure Sensitive Adhesive	<table border="1"> <thead> <tr> <th>Adhesive</th> <th>Material</th> <th>Application</th> </tr> </thead> <tbody> <tr> <td>Pressure Sensitive Adhesive</td> <td>Acrylic</td> <td>High Dielectric, High Temperature, Resistant</td> </tr> <tr> <td>Pressure Sensitive Adhesive</td> <td>Epoxy</td> <td>Highly Conductive, High Temperature</td> </tr> </tbody> </table>	Adhesive	Material	Application	Pressure Sensitive Adhesive	Acrylic	High Dielectric, High Temperature, Resistant	Pressure Sensitive Adhesive	Epoxy	Highly Conductive, High Temperature											
Adhesive	Material	Application																			
Pressure Sensitive Adhesive	Acrylic	High Dielectric, High Temperature, Resistant																			
Pressure Sensitive Adhesive	Epoxy	Highly Conductive, High Temperature																			
Foam Types	<p>Thermoplastic Elastomer (TPE) Urethane</p> <table border="1"> <thead> <tr> <th>Foam Type</th> <th>Construction</th> <th>Color</th> <th>Application</th> <th>Benefits</th> </tr> </thead> <tbody> <tr> <td>Urethane</td> <td>1/2" x 1/2"</td> <td>Black or Grey</td> <td>EMI & Radio Shielding</td> <td>Non-Conductive, Low Compression, Durable</td> </tr> <tr> <td>Thermoplastic Elastomer (TPE)</td> <td>1/2" x 1/2"</td> <td>Black</td> <td>Radio Shielding</td> <td>Conductive, Flexible, Tear Resistant</td> </tr> </tbody> </table>	Foam Type	Construction	Color	Application	Benefits	Urethane	1/2" x 1/2"	Black or Grey	EMI & Radio Shielding	Non-Conductive, Low Compression, Durable	Thermoplastic Elastomer (TPE)	1/2" x 1/2"	Black	Radio Shielding	Conductive, Flexible, Tear Resistant					
Foam Type	Construction	Color	Application	Benefits																	
Urethane	1/2" x 1/2"	Black or Grey	EMI & Radio Shielding	Non-Conductive, Low Compression, Durable																	
Thermoplastic Elastomer (TPE)	1/2" x 1/2"	Black	Radio Shielding	Conductive, Flexible, Tear Resistant																	
Height and Width Tolerance	± .020 inches ± 0.5 mm																				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Laird:

[4742AB51K09600](#)