




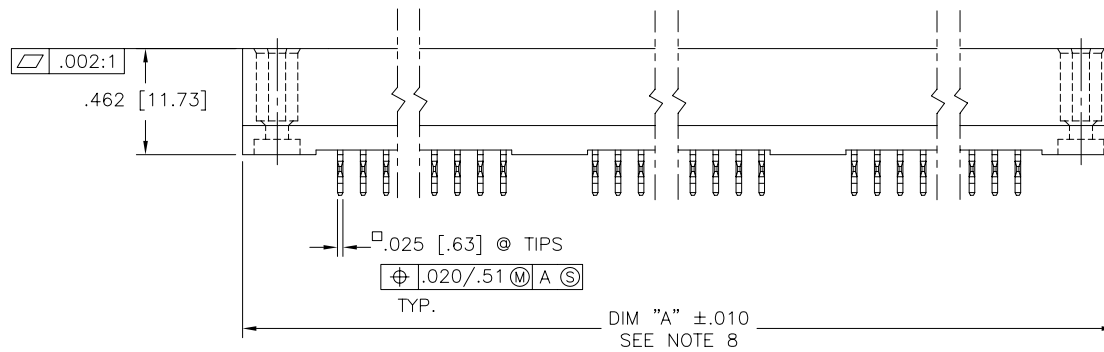

FCIconnect.com

Copyright FCI

PRODUCT NUMBER
SEE TABLE

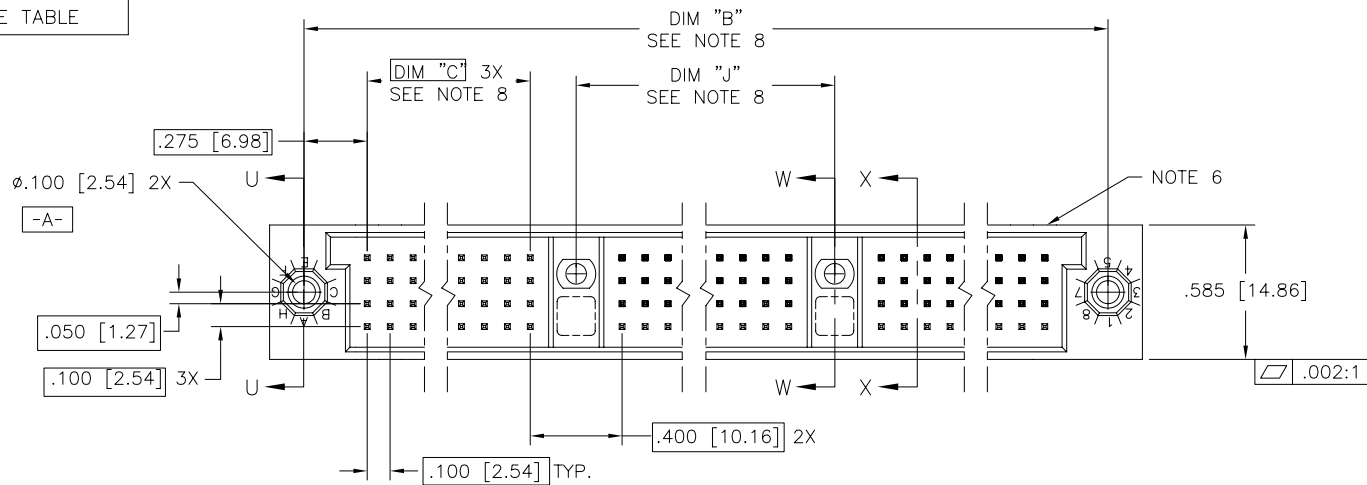

mat'l. code SEE NOTE 3				surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection 		product family HPC					
ltr	ecn no	dr	date	tolerances unless otherwise specified						title					
D	V40285	GIP	1/20/94	angles linear		.XX±.01/.3				INCH/MM 4 ROW VERTICAL HEADER W/PRESS-FIT PINS, 2 G.P.					
E	V40941	PDP	6/1/94			.XXX±.005/.13									
F	V82253	HTB	12/29/98	0'±2"		.XXXX±.0020/.051				scale 1:1					
G	V00271	JWS	1/31/00	dr	D.SHEAFFER		3/14/91				dwg no		sheet 1 of 7		size
H	V05-0739	DAI	09/14/05	enr	S.CLARK		3/14/91				50011		A3		
J	V05-1039	DAI	11/11/05	chr	S.CLARK		3/14/91								
K	M06-0283	MHT	7/27/06	appd	S.CLARK		3/14/91								
sheet	revision	K	K	K	K	K	K	K							
index	sheet	1	2	3	4	5	6	7							

form: A3

PDM: Rev:K

STATUS: Released

Printed: May 13, 2011

1

2

3

4

5

6

PRODUCT NUMBER

SEE TABLE

NOTES:

1. PRODUCT NUMBERING CODE:

50011 - X YYY Z LF

LEAD FREE (OPTIONAL)
TAIL LENGTH (SEE TABLE)
NO. OF POSITIONS (SEE NOTE 2)
PLATING (SEE TABLE)
BASE NUMBER

PRODUCT NUMBERING CODE FOR
SELECT LOAD PART NUMBERS:

50011 - XXYYY LF

LEAD FREE (OPTIONAL)
SEQUENCE NUMBER
ALWAYS 'XX'
BASE NUMBER

② THIS PRODUCT IS CONFIGURED IN SIZES OF 30 thru 150
COLUMNS IN INCREMENTS OF THREE.
i.e.: 30,33,36,39,.....147,150.

③ HOUSING MATERIAL: GLASS AND MINERAL FILLED
HIGH TEMP. THERMOPLASTIC. FLAME RETARDANT PER
UL94V-0. COLOR: BLACK.
PIN MATERIAL: PHOS BRONZE

④ $\phi .0453/1.151$ DRILLED HOLE PLATED WITH $.0003/.007$ MIN.
SnPb OVER $.001/.03$ to $.003/.08$ Cu. PLATING TO ACHIEVE
A $\phi .040 \pm .003/1.02 \pm .08$ HOLE.

⑤ TO ASSURE PROPER INSTALLATION: TOOLING, AS
SPECIFIED IN INSTRUCTION MANUAL 155915-001 MUST
BE USED. PIN MATING LENGTH WILL BE $\pm .002/.05$
AFTER INSTALLATION.

⑥ COMPANY NAME, PART NUMBER AND LOT CODE TO APPEAR ON
THIS SURFACE PER BUS-12-108.


⑦ REFERENCE 50809 FOR F.M.L.B. AVAILABLE OPTIONS
AND WORKSHEET.

⑧ LENGTH FORMULAS:


DIM "A" = $.100/2.54 \times \text{NO. OF COLUMNS} + 1.35/34.3$ DIM "B" = $.100/2.54 \times \text{NO. OF COLUMNS} + 1.050/26.67$ DIM "C" = $.100/2.54 \times \text{NO. OF COLUMNS DIVIDED BY 3} - .100/2.54$ DIM "J" = $.100/2.54 \times \text{NO. OF COLUMNS DIVIDED BY 3} + .300/7.62$

9. THIS PRODUCT (WITH "LF" SUFFIX) MEETS EUROPEAN UNION DIRECTIVES AND OTHER
COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.


10. THIS HOUSING WILL WITHSTAND EXPOSURE TO 260° C PEAK TEMPERATURE
FOR 10-30 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW
OVEN.




SECTION U-U



SECTION W-W



SECTION X-X

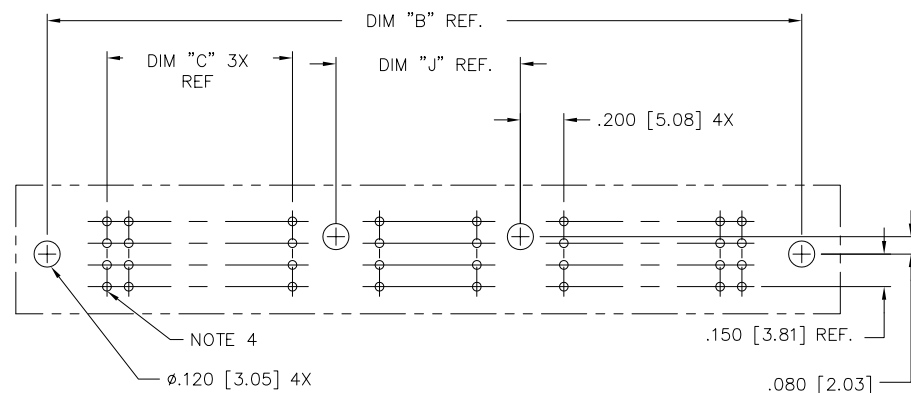

RECOMMENDED PCB LAYOUT
(ALL HOLES LOCATED ON $.100/2.54$ GRID
UNLESS OTHERWISE SPECIFIED)

mat'l. code SEE NOTE 3	surface ISO 1302 ✓ ISO 406 ISO 1101	tolerance ISO 406 ISO 1101	projection INCH/MM	product family HPC
ltr K	ecm no	dr date	tolerances unless otherwise specified linear angular 0°±2'	title 4 ROW VERTICAL HEADER W/PRESS-FIT PINS, 2 G.P.
			linear .XX±.01/.3 .XXX±.005/.13 .XXX±.0020/.05	dwg no sheet 2 of 7 size A3
		dr D.SHEAFFER 3/14/91	scale 1:1	
		enr S.CLARK 3/14/91	FCI	
		chr S.CLARK 3/14/91		
		appd S.CLARK 3/14/91		
sheet index	revision sheet			type Product Customer Drawing

5	(
	l
	[
	P

0	0
	1
	2
	3

[illegible][illegible]

PRODUCT NUMBER
SEE TABLE

SELECT LOAD (50011-XX007 AND 50011-XX007LF ONLY)

D C B A	1	5	10	15	20	25	30	35	40	45	C U I D E
PIN 1											
	46	50	55	60	65	70	75	80	85	90	C U I D E
	91	95	100	105	110	115	120	125	130	135	C U I D E

SPECIAL NOTES FOR -XX007 AND -XX007LF ONLY:

- ALL POSITIONS ARE LOADED WITH "A", EXCEPT AS SHOWN.
- COLUMN 1 ROW A IS DESIGNATED AS SIGNAL PIN 1, AS VIEWED FROM THE MATING FACE.
- SIGNAL DATA FOR 50011-XX007 AND 50011-XX007LF:
SIZE 4 X 135
TOTAL NO. OF POSITIONS - 540
NO. OF POSITIONS LOADED - 540

ITEM KEY	QTY.	MATING LENGTH	TAIL LENGTH
A	538	.200/5.08	.177/4.50
B	2	.240/6.10	.177/4.50

mat'l. code SEE NOTE 3		surface ISO 1302	tolerance ISO 406 ISO 1101	projection 	product family HPC
ltr K	ecr no	dr date	tolerances unless otherwise specified	INCH/MM scale 1:1	title 4 ROW VERTICAL HEADER W/PRESS-FIT PINS, 2 G.P.
			angles linear 0°±2'		dwg no 50011
			dr D.SHEAFFER 3/14/91		sheet 4 of 7 size A3
			enr S.CLARK 3/14/91		type Product Customer Drawing
			chr S.CLARK 3/14/91		
			appd S.CLARK 3/14/91		
sheet index	revision sheet				



FCIconnect.com

Copyright FCI

PRODUCT NUMBER
SEE TABLE

SELECT LOAD (50011-XX011 AND 50011-XX011F ONLY)

	1	5	10	15	20	25	30	35	40	45	GUIDE
D											
C											
B											
A											

	1	46	50	55	60	65	70	75	80	85	90	GUIDE
D												
C												
B												
A												

	91	95	100	105	110	115	120	125	130	135	
D											
C											
B											
A											

SPECIAL NOTES FOR -XX011 AND -XX011LF ONLY:

- ALL POSITIONS ARE LOADED WITH "A", EXCEPT AS SHOWN.
- COLUMN 1 ROW A IS DESIGNATED AS SIGNAL PIN 1, AS VIEWED FROM THE MATING FACE.
- SIGNAL DATA FOR 50011-XX011 AND 50011-XX011LF:
SIZE 4 X 135
TOTAL NO. OF POSITIONS - 540
NO. OF POSITIONS LOADED - 540

ITEM KEY	QTY.	MATING LENGTH	TAIL LENGTH
A	492	.200/5.08	.177/4.50
B	48	.220/5.58	.533/13.54

mat'l. code SEE NOTE 3	surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection INCH/MM	product family HPC
ltr K	ecr no	dr date	tolerances unless otherwise specified linear .XX±.01/.3 angular .XXX±.005/.13 0°±2' .XXX±.0020/.051	title 4 ROW VERTICAL HEADER W/PRESS-FIT PINS, 2 G.P.
			scale 1:1	dwg no 50011
				sheet 6 of 7 size A3
				type Product Customer Drawing
sheet index	revision sheet			

form: A3



FCIconnect.com

Copyright FCI

PRODUCT NUMBER	NUMBER OF POSTIONS SEE NOTE 2	MATING LENGTH	TAIL LENGTH ±.015/0.38	TERMINAL PLATING
50011-1YYYA	YYY	.220[5.59]	.177/4.50	30μ"/76μ GOLD
50011-1YYYC	YYY		.533/13.54	30μ"/76μ GOLD
50011-1YYXD	YYY		.733/18.62	30μ"/76μ GOLD
50011-1YYYG	YYY		.250/6.35	30μ"/76μ GOLD
50011-1YYYL	YYY		.188/4.78	30μ"/76μ GOLD
50011-1YYYP	YYY		.470/11.94	30μ"/76μ GOLD
50011-3YYYA	YYY		.177/4.50	50μ"/1.27μ GOLD
50011-3YYYC	YYY		.533/13.54	50μ"/1.27μ GOLD
50011-3YYYD	YYY		.733/18.62	50μ"/1.27μ GOLD
50011-3YYYG	YYY		.250/6.35	50μ"/1.27μ GOLD
50011-3YYYL	YYY		.188/4.78	50μ"/1.27μ GOLD
50011-3YYYP	YYY		.470/11.94	50μ"/1.27μ GOLD
50011-5YYYA	YYY		.177/4.50	30μ"/76μ GXT
50011-5YYYALF	YYY		.177/4.50	30μ"/76μ GXT
50011-5YYYC	YYY		.533/13.54	30μ"/76μ GXT
50011-5YYYCLF	YYY		.533/13.54	30μ"/76μ GXT
50011-5YYYD	YYY		.733/18.62	30μ"/76μ GXT
50011-5YYYDLF	YYY		.733/18.62	30μ"/76μ GXT
50011-5YYYG	YYY		.250/6.35	30μ"/76μ GXT
50011-5YYYGLF	YYY		.250/6.35	30μ"/76μ GXT
50011-5YYYL	YYY		.188/4.78	30μ"/76μ GXT
50011-5YYYLLF	YYY		.188/4.78	30μ"/76μ GXT
50011-5YYYPLF	YYY	.220[5.59]	.470/11.94	30μ"/76μ GXT
50011-XX005	540	SEE SHEET 3	SEE SHEET 3	30μ"/76μ GXT
50011-XX005LF	540	SEE SHEET 3	SEE SHEET 3	30μ"/76μ GXT
50011-XX007	540	SEE SHEET 4	SEE SHEET 4	30μ"/76μ GXT
50011-XX007LF	540	SEE SHEET 4	SEE SHEET 4	30μ"/76μ GXT
50011-XX008	540	SEE SHEET 5	SEE SHEET 5	30μ"/76μ GXT
50011-XX008LF	540	SEE SHEET 5	SEE SHEET 5	30μ"/76μ GXT
50011-XX011	540	SEE SHEET 6	SEE SHEET 6	30μ"/76μ GXT
50011-XX011LF	540	SEE SHEET 6	SEE SHEET 6	30μ"/76μ GXT

mat'l. code SEE NOTE 3				surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection 	product family HPC
ltr	ec	no	dr	date	tolerances unless otherwise specified	INCH/MM scale 1:1 	title
K					angles linear .XX±.01/.3		4 ROW VERTICAL HEADER
					0'±2' .XXX±.005/.13		W/PRESS-FIT PINS, 2 G.P.
					.XXX±.0020/.051		dwg no sheet 7 of 7 size
				dr	D.SHEAFFER 3/14/91		50011 A3
				enr	S.CLARK 3/14/91		
				chr	S.CLARK 3/14/91		
				appd	S.CLARK 3/14/91		
sheet index	revision sheet						type Product Customer Drawing

form: A3

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

FCI / Amphenol:

[50011-5576ALF](#) [50011-XX005LF](#) [50011-XX008LF](#) [50011-XX011LF](#) [50011-5576A](#) [50011-5600A](#) [50011-XX008](#)
[50011-XX011](#) [50011-1480C](#) [50011-1480CLF](#) [50011-1492C](#) [50011-1492CLF](#) [50011-1504C](#) [50011-1504CLF](#) [50011-](#)
[1516C](#) [50011-1516CLF](#) [50011-1516D](#) [50011-1516G](#) [50011-1528C](#) [50011-1528CLF](#) [50011-1540C](#) [50011-1552C](#)
[50011-1552CLF](#) [50011-1564C](#) [50011-1564CLF](#) [50011-1576C](#) [50011-1576CLF](#) [50011-1588C](#) [50011-1588CLF](#)
[50011-1600A](#) [50011-1600C](#) [50011-1600CLF](#) [50011-5540C](#) [50011-5540L](#) [50011-XX007](#)