
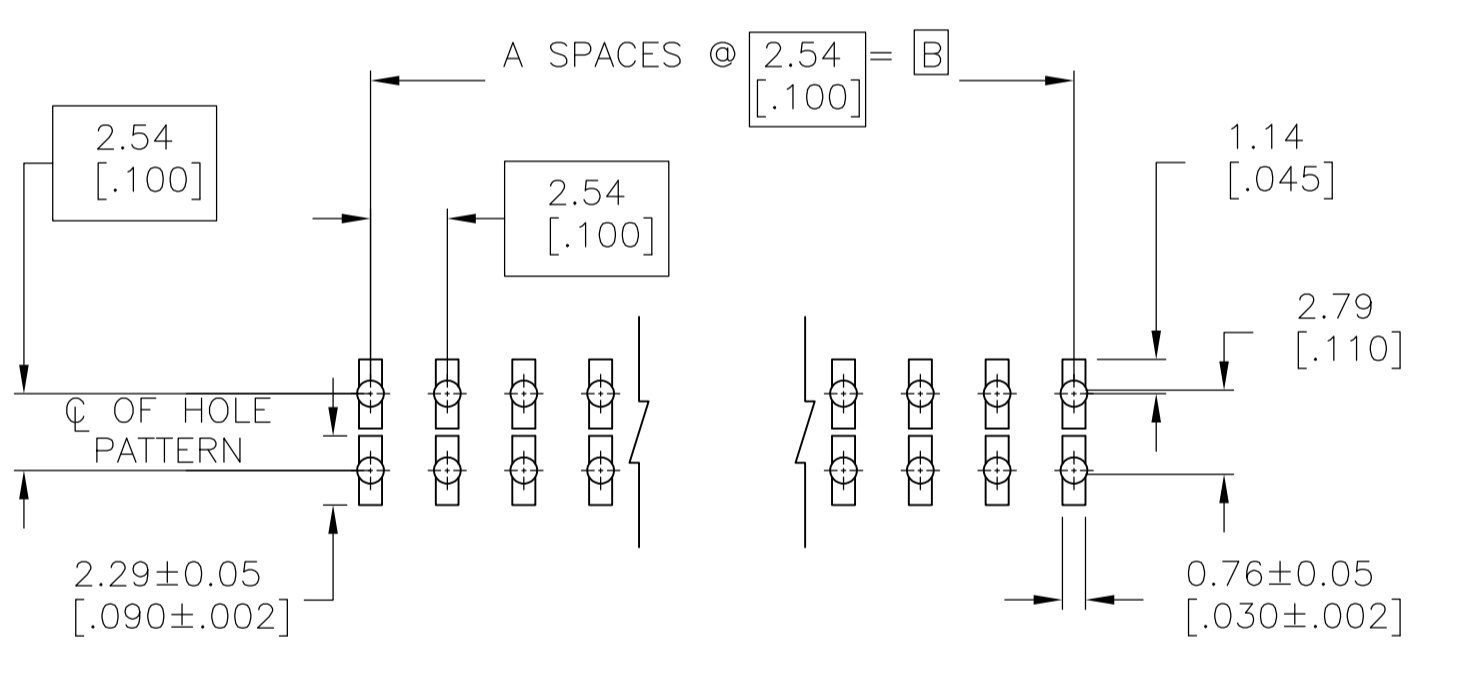


REVISIONS					
P	LTR	DESCRIPTION	DATE	DMN	APVO
C		REVISED PER ECO-14-000260	07JUL2014	NK	MM
D		REVISED PER ECO-17-003710	18MAR2017	RS	MM

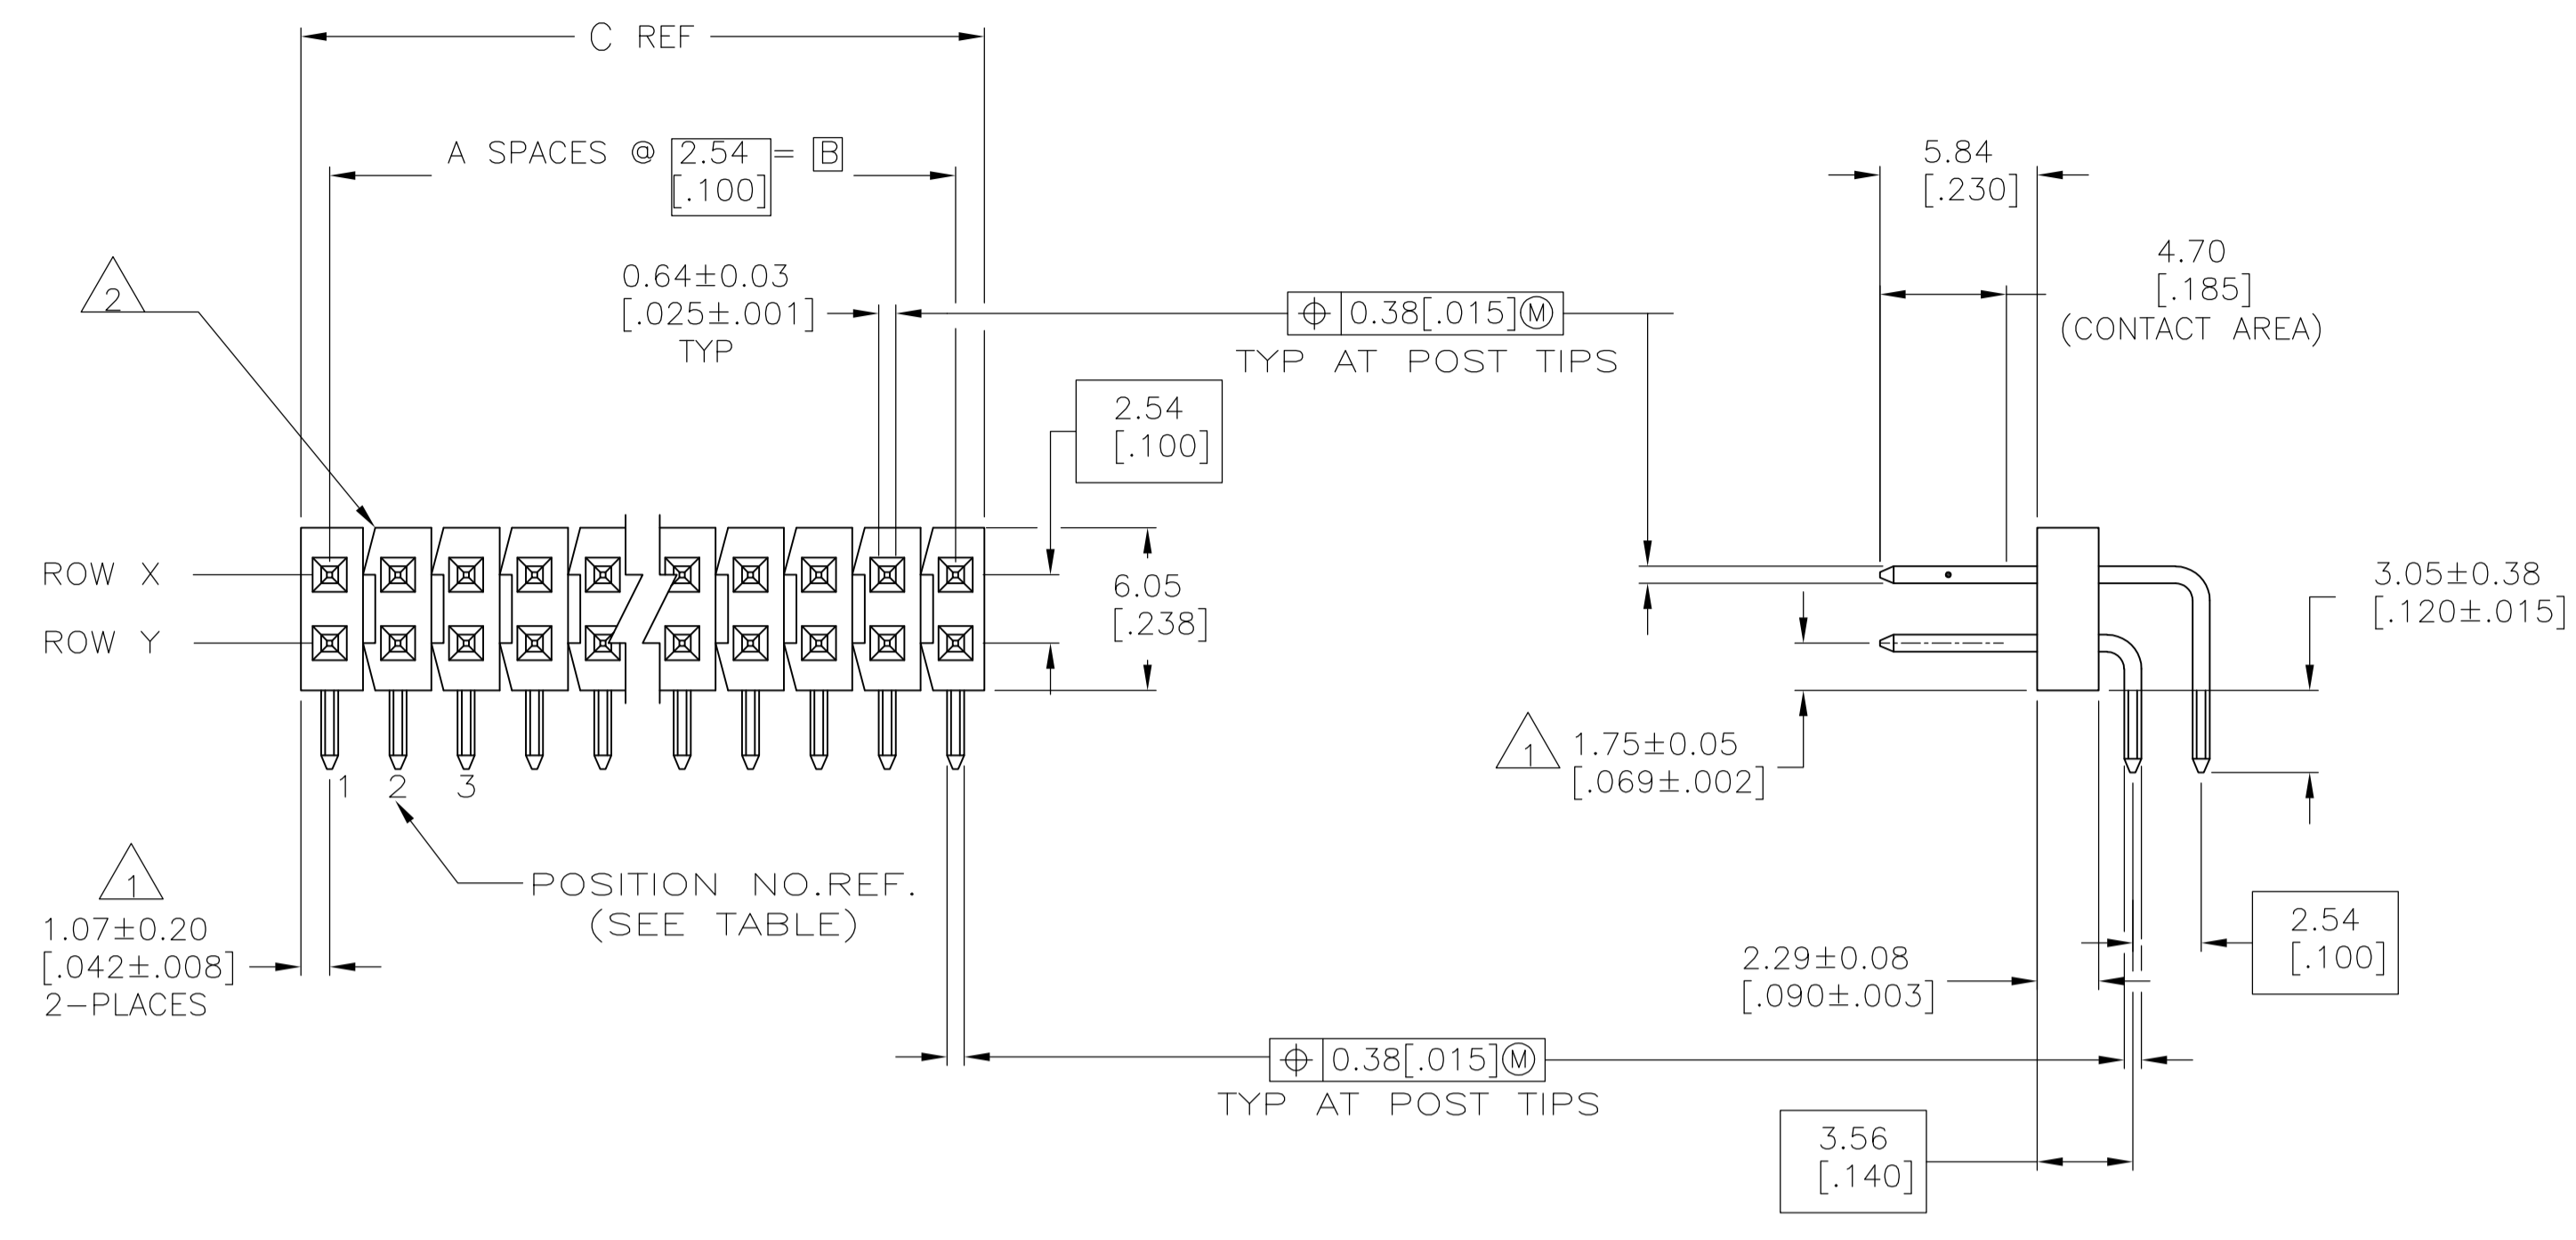

RECOMMENDED PC BOARD MOUNTING DIMENSIONS FOR .063 [1.60] THICK PC BOARD AND .012 [.305] STENCIL THICK.

- 1 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING.
- 2 BREAKAWAY NOTCH ANGLE CAN BE ORIENTED TO THE RIGHT ( AS SHOWN ) OR TO THE LEFT
- 3 GLASS FILLED THERMOPLASTIC (THAT WILL WITHSTAND IR REFLOW PROCESSING) COLOR: BLACK, POST: COPPER ALLOY.
- 4 0.000762 [.000030] GOLD ON CONTACT AREA, 0.00254-0.00508 [.000100-.000200] MATTE TIN-LEAD ALL OVER 0.00127 [.000050] NICKEL.
- 5 PARTS PACKAGED IN TUBES.
- 6 0.000762 [.000030] GOLD ON CONTACT AREA, 0.00254-0.00508 [.000100-.000200] MATTE TIN ALL OVER 0.00127 [.000050] NICKEL.
- 7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

OBSOLETE	6	PLATING		C	B	A	NO. OF POSITIONS	PART NUMBER	7	5	PLATING		C	B	A	NO. OF POSITIONS	PART NUMBER
		C	B								C	B					
		101.19	99.06	39	80	9-146308-0	75.79	73.66	29	60	4-146308-1						
		[3.984]	[3.900]				[2.984]	[2.900]									
		98.65	96.52	38	78	8-146308-9	101.19	99.06	39	80	4-146308-0						
		[3.884]	[3.800]				[3.984]	[3.900]									
		96.11	93.98	37	76	8-146308-8	98.65	96.52	38	78	3-146308-9						
		[3.784]	[3.700]				[3.884]	[3.800]									
		93.57	91.44	36	74	8-146308-7	96.11	93.98	37	76	3-146308-8						
		[3.684]	[3.600]				[3.784]	[3.700]									
		91.03	88.90	35	72	8-146308-6	93.57	91.44	36	74	3-146308-7						
		[3.584]	[3.500]				[3.684]	[3.600]									
		88.49	86.36	34	70	8-146308-5	91.03	88.90	35	72	3-146308-6						
		[3.484]	[3.400]				[3.584]	[3.500]									
		85.95	83.82	33	68	8-146308-4	88.49	86.36	34	70	3-146308-5						
		[3.384]	[3.300]				[3.484]	[3.400]									
		83.41	81.28	32	66	8-146308-3	85.95	83.82	33	68	3-146308-4						
		[3.284]	[3.200]				[3.384]	[3.300]									
		80.87	78.74	31	64	8-146308-2	83.41	81.28	32	66	3-146308-3						
		[3.184]	[3.100]				[3.284]	[3.200]									
		78.33	76.20	30	62	8-146308-1	80.87	78.74	31	64	3-146308-2						
		[3.084]	[3.000]				[3.184]	[3.100]									
		75.79	73.66	29	60	8-146308-0	78.33	76.20	30	62	3-146308-1						
		[2.984]	[2.900]				[3.084]	[3.000]									
		73.25	71.12	28	58	7-146308-9	75.79	73.66	29	60	3-146308-0						
		[2.884]	[2.800]				[2.984]	[2.900]									
		70.71	68.58	27	56	7-146308-8	73.25	71.12	28	58	2-146308-9						
		[2.784]	[2.700]				[2.884]	[2.800]									
		68.17	66.04	26	54	7-146308-7	70.71	68.58	27	56	2-146308-8						
		[2.684]	[2.600]				[2.784]	[2.700]									
		65.63	63.5	25	52	7-146308-6	68.17	66.04	26	54	2-146308-7						
		[2.584]	[2.500]				[2.684]	[2.600]									
		63.09	60.96	24	50	7-146308-5	65.63	63.5	25	52	2-146308-6						
		[2.484]	[2.400]				[2.584]	[2.500]									
		60.55	58.42	23	48	7-146308-4	63.09	60.96	24	50	2-146308-5						
		[2.384]	[2.300]				[2.484]	[2.400]									
		58.01	55.88	22	46	7-146308-3	60.55	58.42	23	48	2-146308-4						
		[2.284]	[2.200]				[2.384]	[2.300]									
		55.47	53.34	21	44	7-146308-2	58.01	55.88	22	46	2-146308-3						
		[2.184]	[2.100]				[2.284]	[2.200]									
		52.93	50.80	20	42	7-146308-1	55.47	53.34	21	44	2-146308-2						
		[2.084]	[2.000]				[2.184]	[2.100]									
		50.39	48.26	19	40	7-146308-0	52.93	50.80	20	42	2-146308-1						
		[1.984]	[1.900]				[2.084]	[2.000]									
		47.85	45.72	18	38	6-146308-9	50.39	48.26	19	40	2-146308-0						
		[1.884]	[1.800]				[1.984]	[1.900]									
		45.31	43.18	17	36	6-146308-8	47.85	45.72	18	38	1-146308-9						
		[1.784]	[1.700]				[1.884]	[1.800]									
		42.77	40.64	16	34	6-146308-7	45.31	43.18	17	36	1-146308-8						
		[1.684]	[1.600]				[1.784]	[1.700]									
		40.23	38.10	15	32	6-146308-6	42.77	40.64	16	34	1-146308-7						
		[1.584]	[1.500]				[1.684]	[1.600]									
		37.69	35.56	14	30	6-146308-5	40.23	38.10	15	32	1-146308-6						
		[1.484]	[1.400]				[1.584]	[1.500]									
		35.15	33.02	13	28	6-146308-4	37.69	35.56	14	30	1-146308-5						
		[1.384]	[1.300]				[1.484]	[1.400]									
		32.61	30.48	12	26	6-146308-3	35.15	33.02	13	28	1-146308-4						
		[1.284]	[1.200]				[1.384]	[1.300]									
		30.07	27.94	11	24	6-146308-2	32.61	30.48	12	26	1-146308-3						
		[1.184]	[1.100]				[1.284]	[1.200]									
		27.53	25.40	10	22	6-146308-1	30.07	27.94	11	24	1-146308-2						
		[1.084]	[1.000]				[1.184]	[1.100]									
		24.99	22.86	9	20	6-146308-0	27.53	25.40	10	22	1-146308-1						
		[.984]	[.900]				[1.084]	[1.000]									
		22.45	20.32	8	18	5-146308-9	24.99	22.86	9	20	1-146308-0						
		[.884]	[.800]				[.984]	[.900]									
		19.91	17.78	7	16	5-146308-8	22.45	20.32	8	18	1-146308-9						
		[.784]	[.700]				[.884]	[.800]									
		17.37	15.24	6	14	5-146308-7	19.91	17.78	7	16	1-146308-8						
		[.684]	[.600]				[.784]	[.700]									
		14.83	12.70	5	12	5-146308-6	17.37	15.24	6	14	1-146308-7						
		[.584]	[.500]				[.684]	[.600]									
		12.29	10.16	4	10	5-146308-5	14.83	12.70	5	12	146308-6						
		[.484]	[.400]				[.584]	[.500]									
		9.75	7.62	3	8	5-146308-4	12.29	10.16	4	10	146308-5						
		[.384]	[.300]				[.484]	[.400]									
		7.21	5.08	2	6	5-146308-3	9.75	7.62	3	8	146308-4						
		[.284]	[.200]				[.384]	[.300]									
		4.67	2.54	1	4	5-146308-2	7.21	5.08	2	6	146308-3						
		[.184]	[.100]				[.284]	[.200]									
		-	-	0	2	5-146308-1	4.67	2.54	1	4	146308-2						
		[ - ]	[ - ]				[.184]	[.100]									
							-	-	0	2	146308-1						

THIS DRAWING IS A CONTROLLED DOCUMENT. DIM: T. HOFFMAN DBMAY95. CHK: G. DUBNICZKI 07JUN95. APVO: G. DUBNICZKI 07JUN95. NAME: STC TE Connectivity. PRODUCT SPEC: HDR ASSY,MODII,BRKAWAY, RT ANG,DBLE ROW,HIGH TEMP, .100X.100 C/L,W/.025 SQRE PTS. APPLICATION SPEC: -. SIZE: A1. CAGE CODE: 00779. DRAWING NO: 146308. WEIGHT: -. RESTRICTED TO: CUSTOMER DRAWING. SCALE: 4:1. SHEET: 1 OF 1. REV: D.