
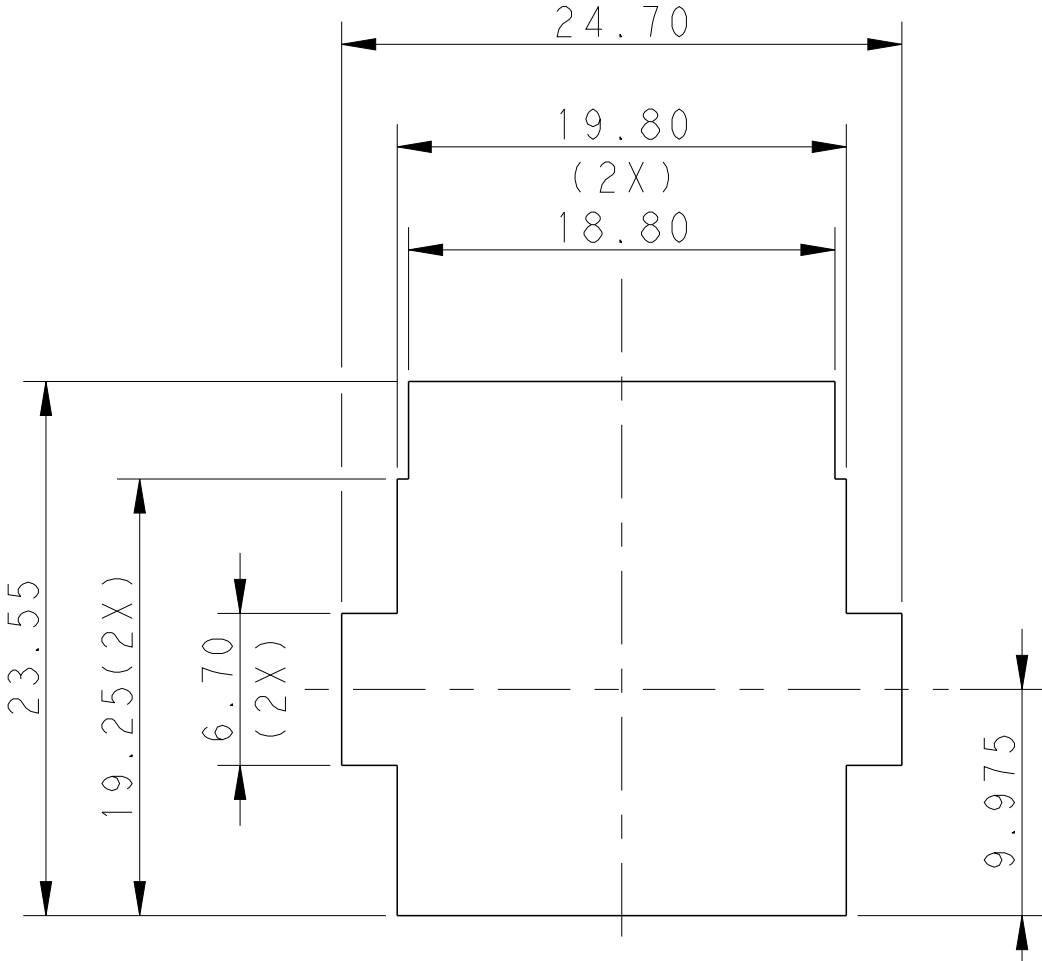
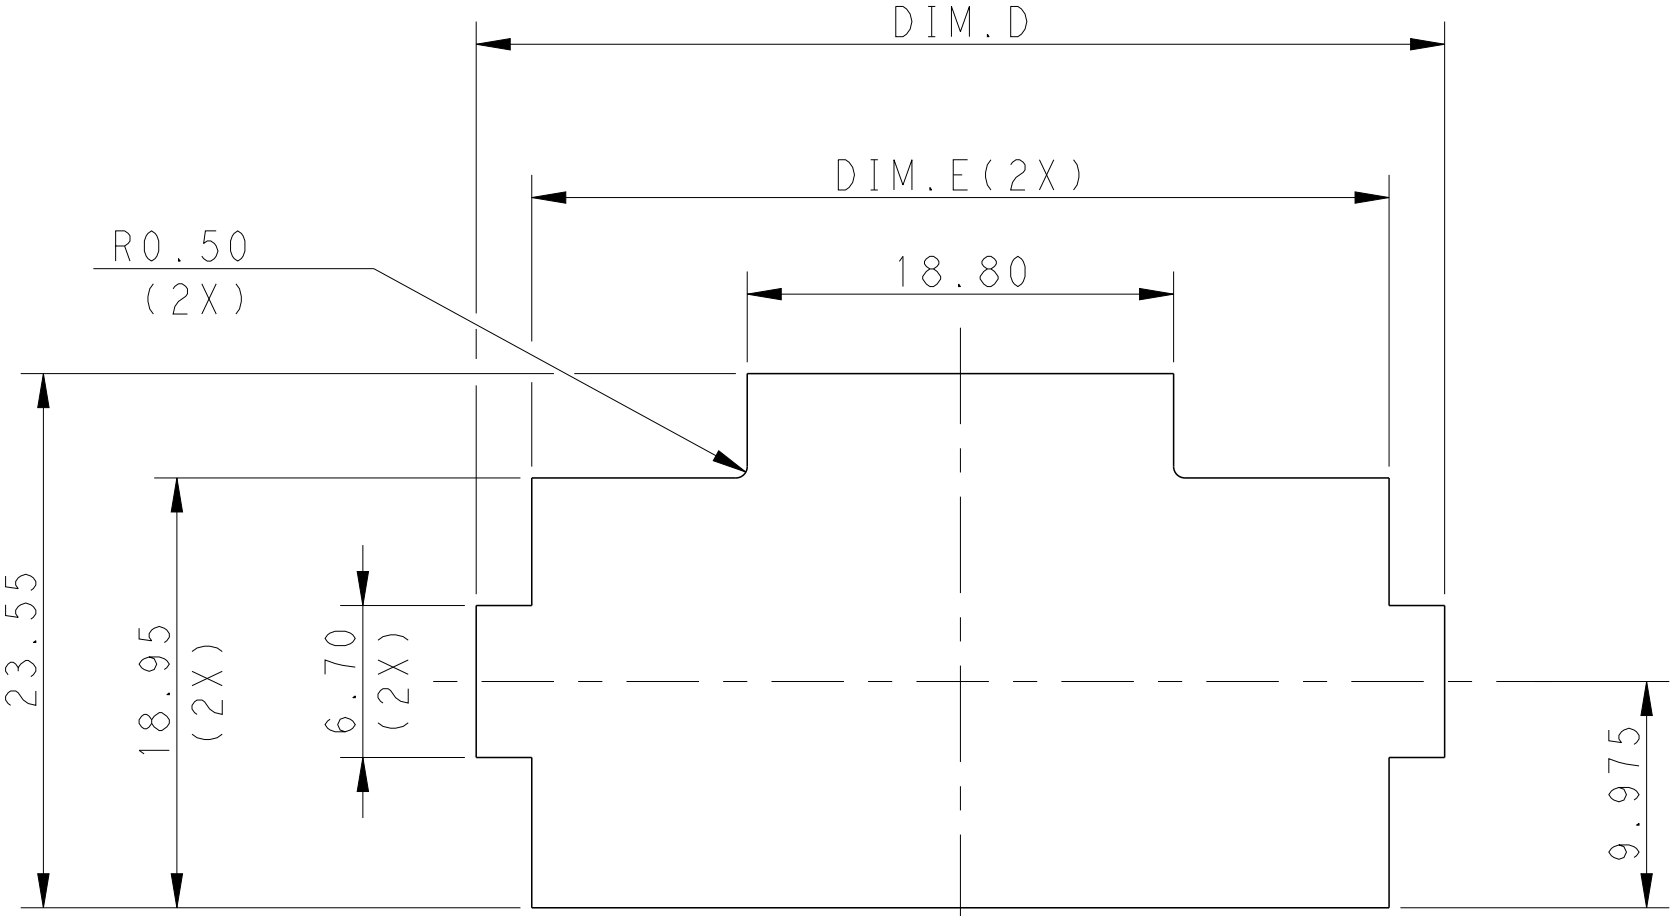






REVISIONS					
LOC	DIST	P	LTR	DESCRIPTION	DATE
-	-	C		REVISED PER ECR-16-003314	15JUL2016

DWN	APVD	DATE	DWN	APVD
EW	GJ			

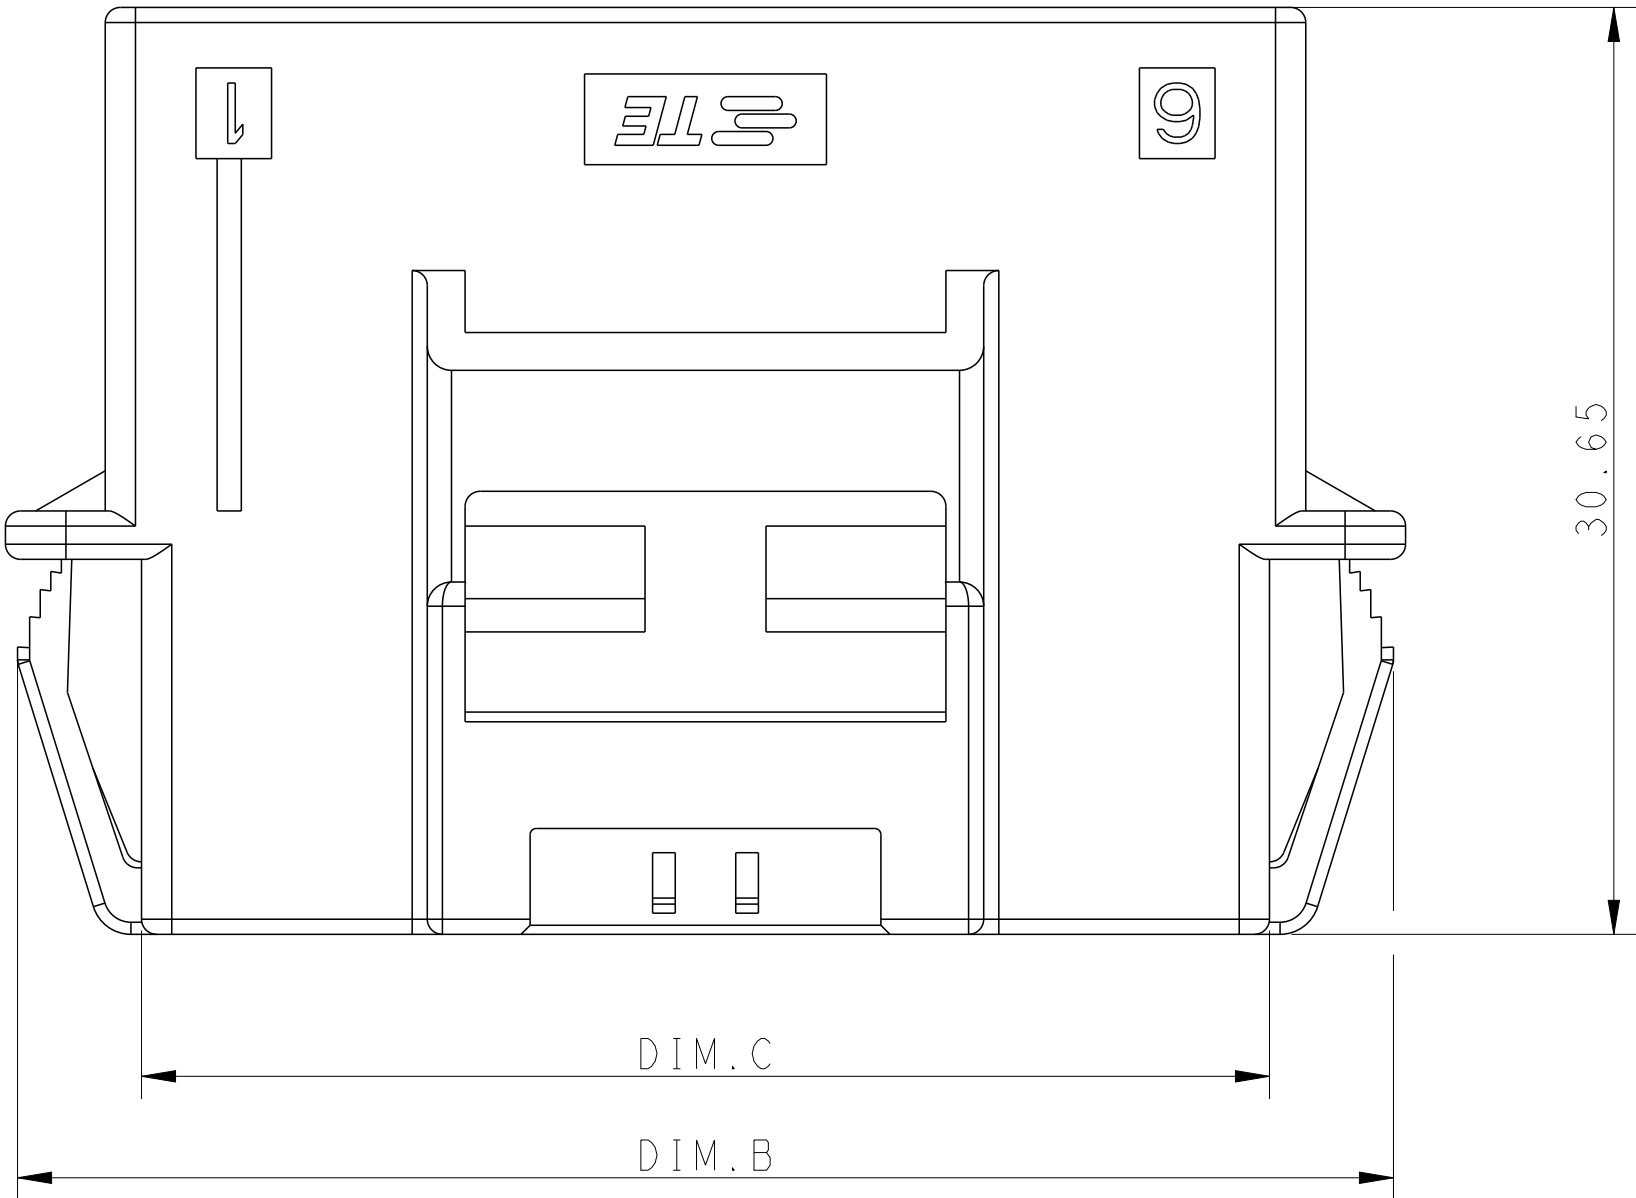

RECOMMENDED PANEL OPENING DEMENSIONS
FOR CAP HOUSING 2*6 AND 2*5 AND 2*4 POSITIONS
(TOLERANCE: ±0.15mm)

RECOMMENDED PANEL OPENING DEMENSIONS
FOR CAP HOUSING 2*3 POSITION
(TOLERANCE: ±0.15mm)

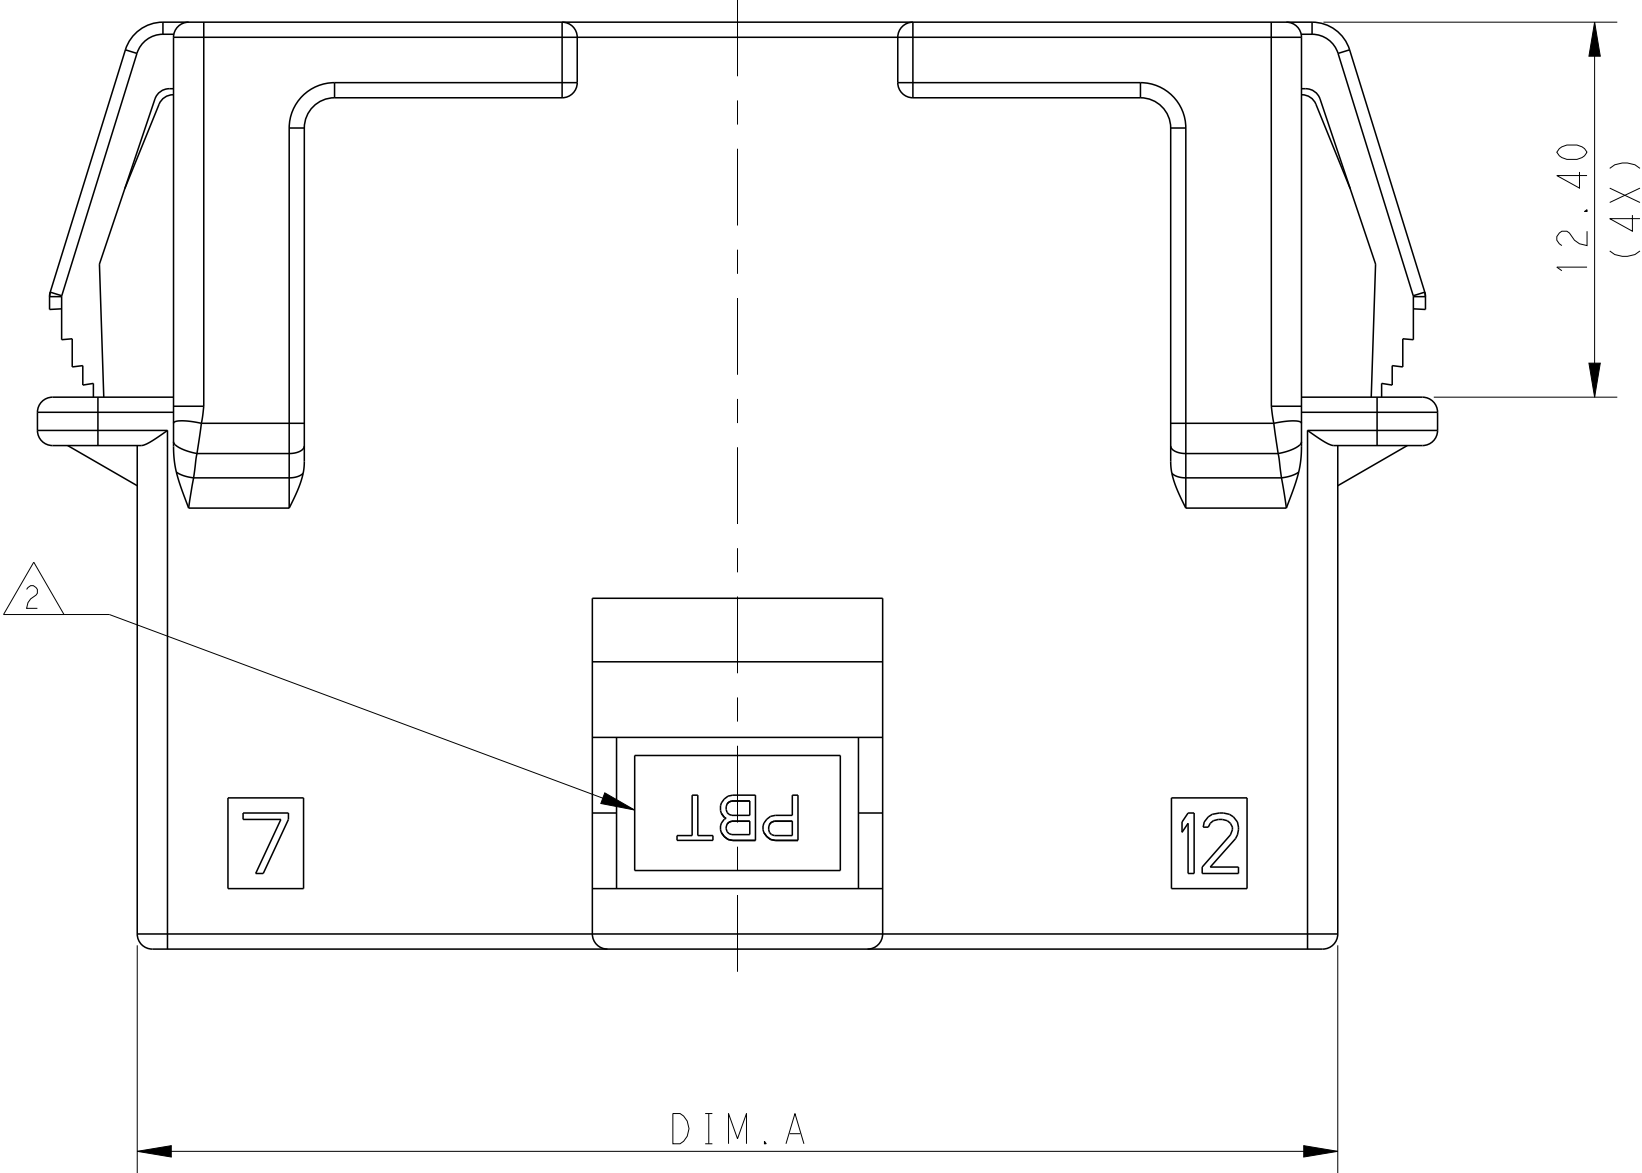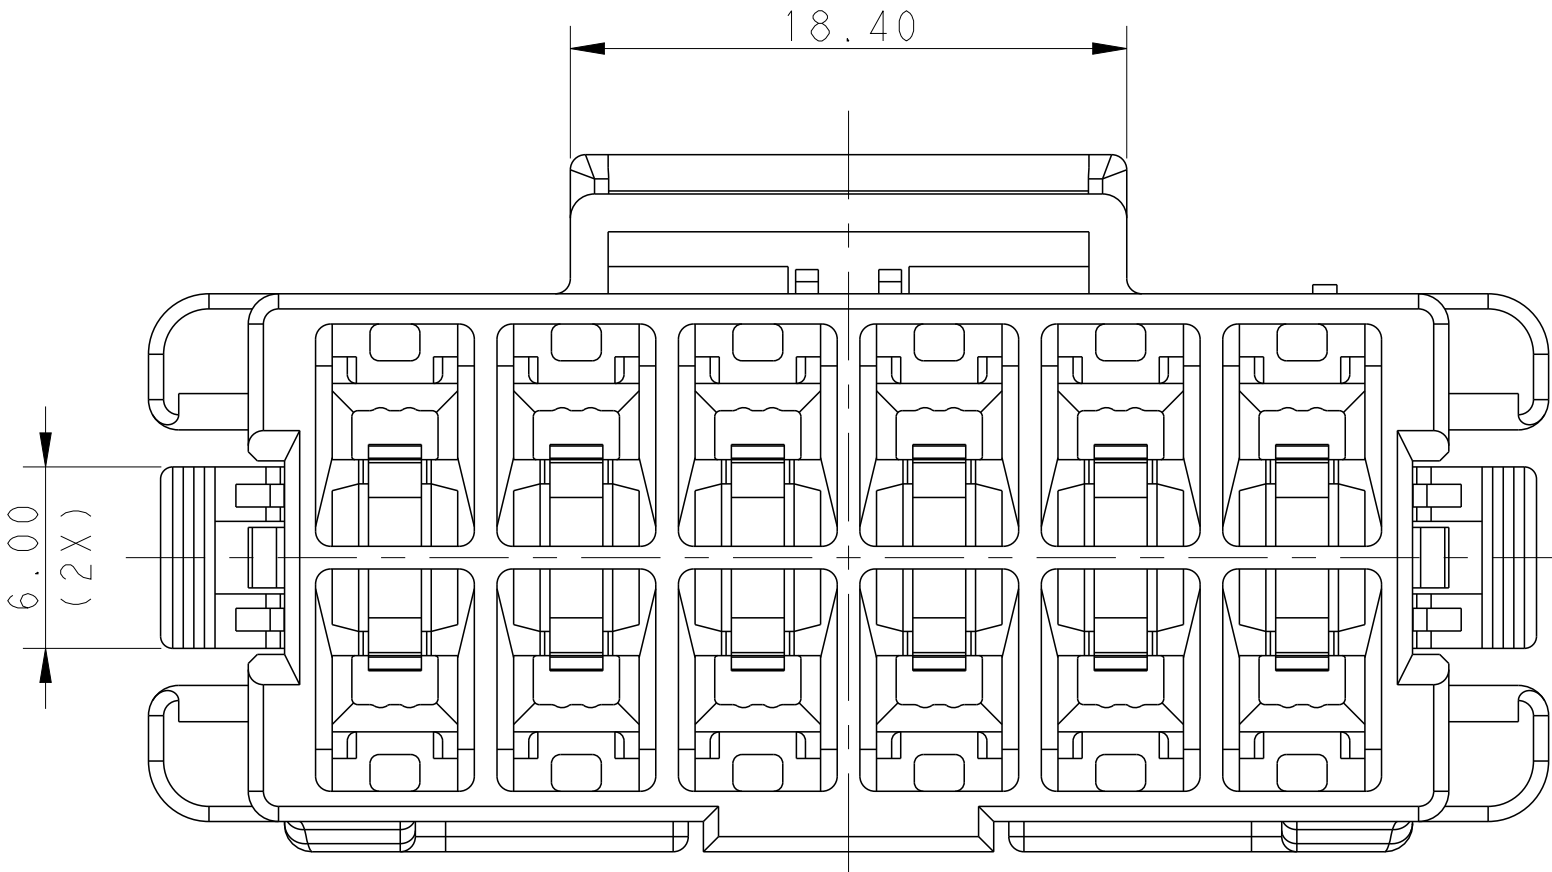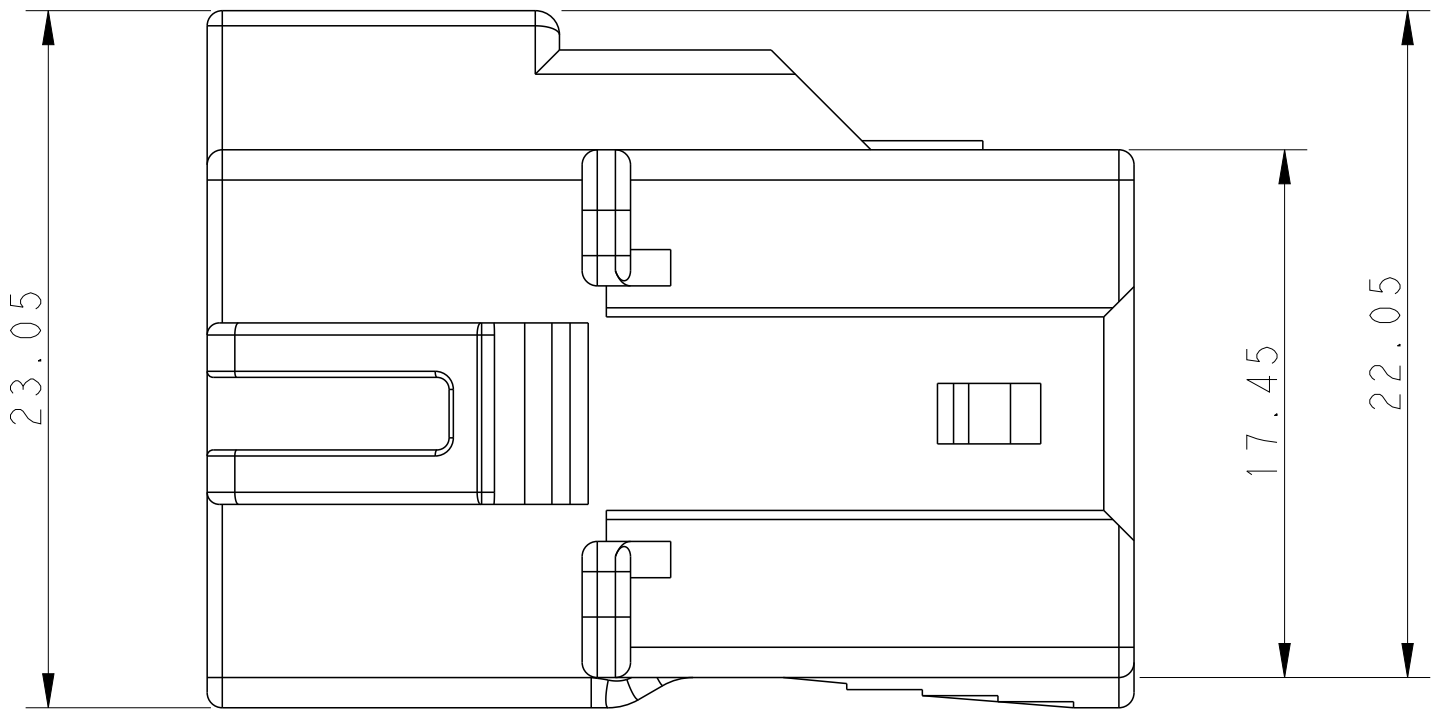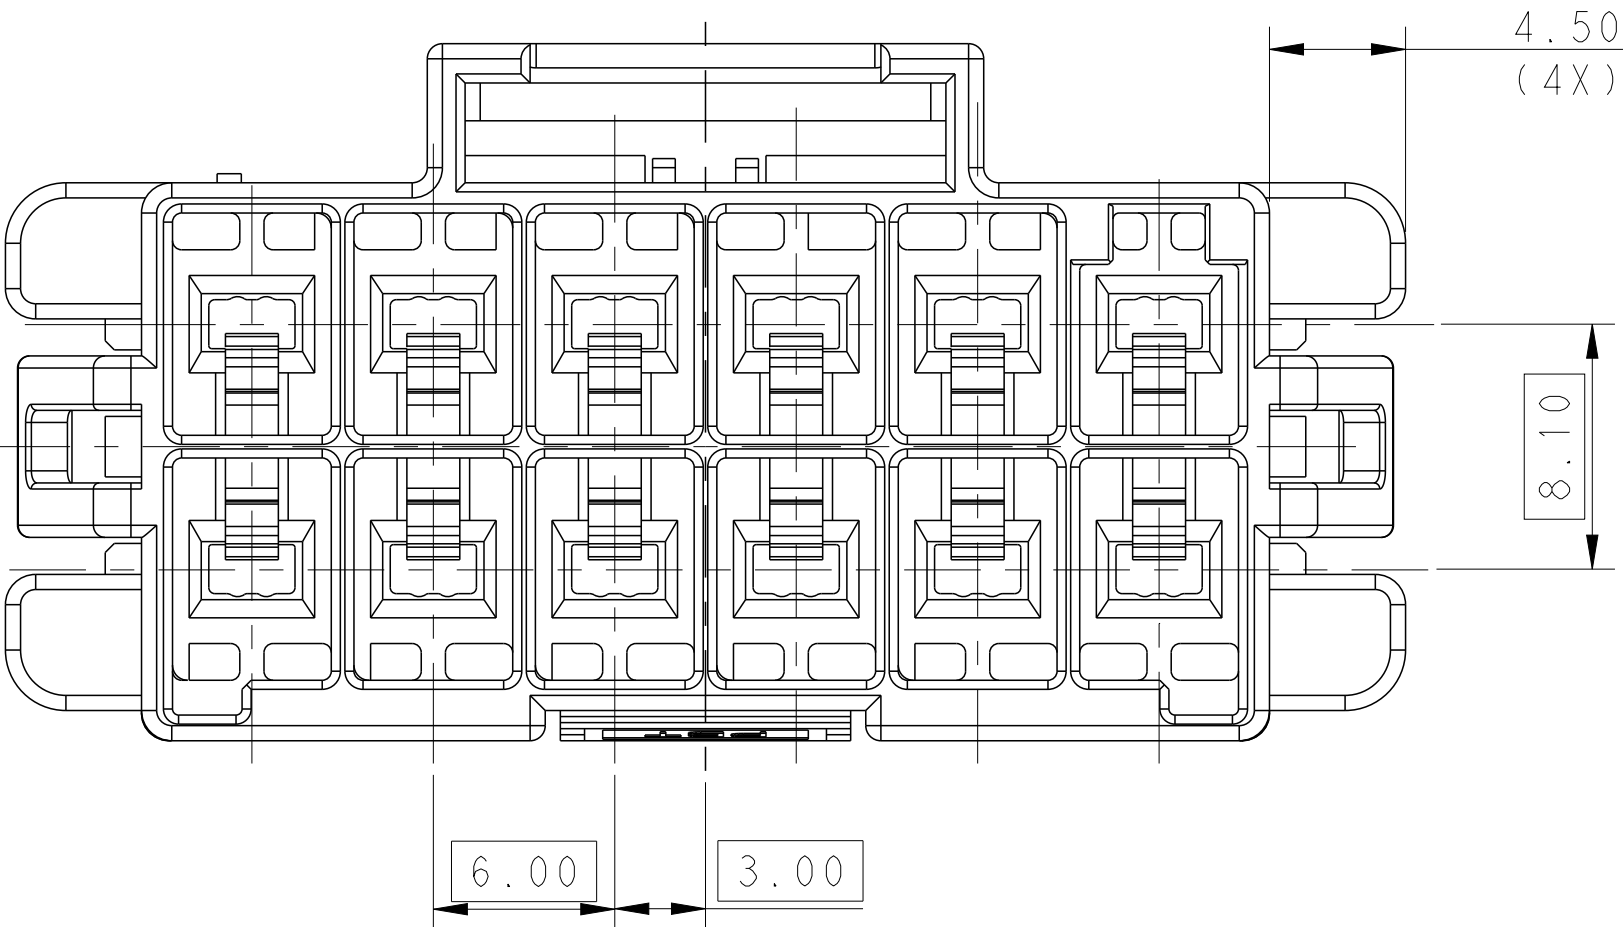

- 1 MATERIAL:
LEVEL 1:PBT, STANDARD TEMPERATURE 105°C
KEY A:NATURAL; KEY B:PURPLE; KEY C:BLUE; KEY D:YELLOW
LEVEL 2:NYLON, HIGH TEMPERATURE 150°C
KEY A:LIGHT GREY; KEY B:RED; KEY C:BLACK; KEY D:NATURAL

- 2 MATERIAL MARK:
LEVEL 1:PBT, LEVEL 2:HDT

- 3 APPLICABLE CONTACT P/N
TAB CONTACT:1971238/1971780/82/84/86/88-*,2238067-*

- 4 MATING CONN, P/N
PLUG HSG: *-1971776-
TPA(LOCK PLATE): *-1971778-*



- 5 RECOMMENDED PANEL THICKNESS:1.0-2.0mm

- 6 THIS PRODUCT HAS NOT COMPLETED VALIDATION TESTING





POS	A	B	C	D	E
2*6	39.70	45.5	37.30	42.70	37.80
2*5	33.70	39.5	31.30	36.70	31.80
2*4	27.70	33.5	25.30	30.70	25.80
2*3	21.70	27.5	19.30		

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TOMMY WU		06JUL2012		 TE Connectivity			
DIMENSIONS:		CHK	HAPYE WU		06JUL2012					
mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	YUHONG MAO		06JUL2012		NAME CAP HOUSING,PANEL MOUNT,DOUBLE ROW POWER TRIPLE LOCK	
		0 PLC		±0.35		PRODUCT SPEC				
		1 PLC		±0.25		108-106118				
		2 PLC		±0.25		APPLICATION SPEC				
		3 PLC		±0.25		114-106118				
		4 PLC		±0.25		WEIGHT				
		ANGLES		±0.25		Customer Drawing				
FINISH		-		SCALE		SHEET		RESTRICTED TO		
1		-		1		2				
		-		1		2				
MATERIAL		-		-		-		REV		
		-		-		-		C		



LOC		DIST		REVISIONS			
P	LYR	DESCRIPTION			DATE	OWN	APVD
-	-	SEE SHEET 1			-	-	-

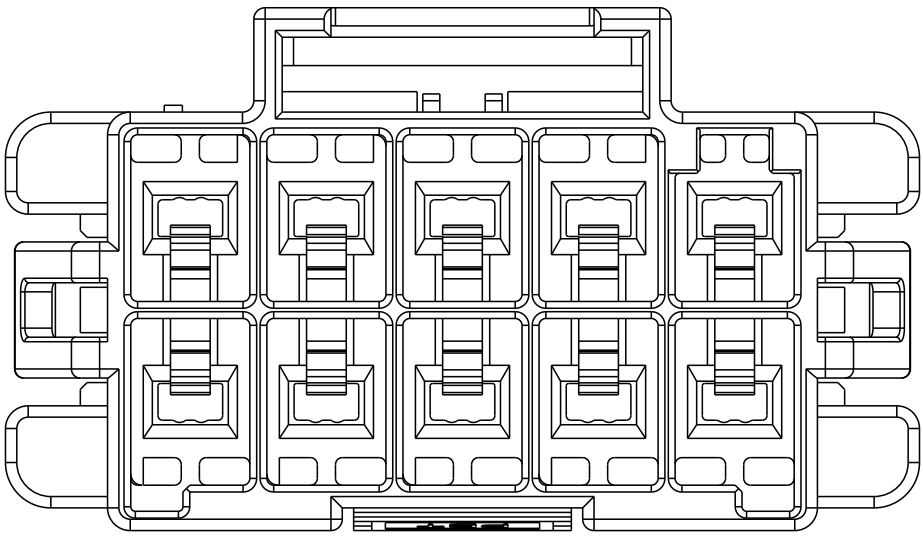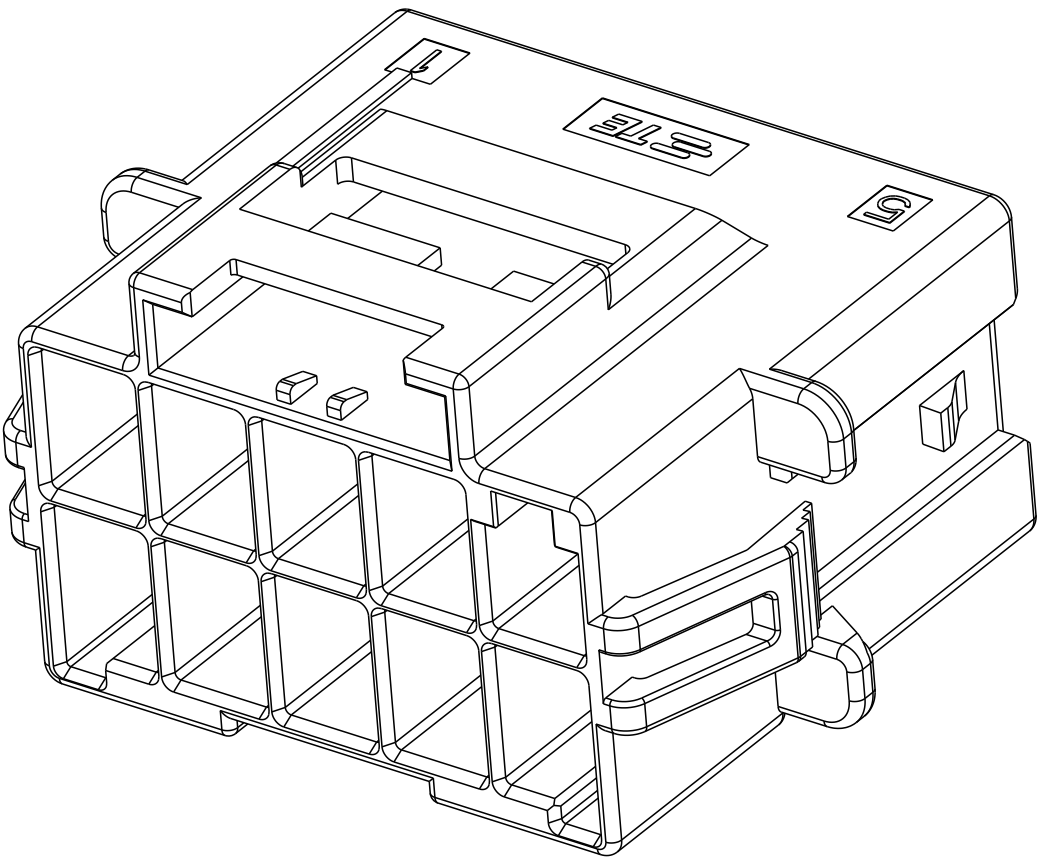





2*5 POSITIONS

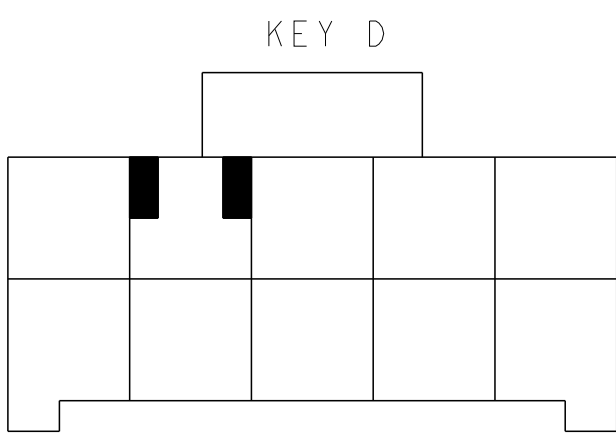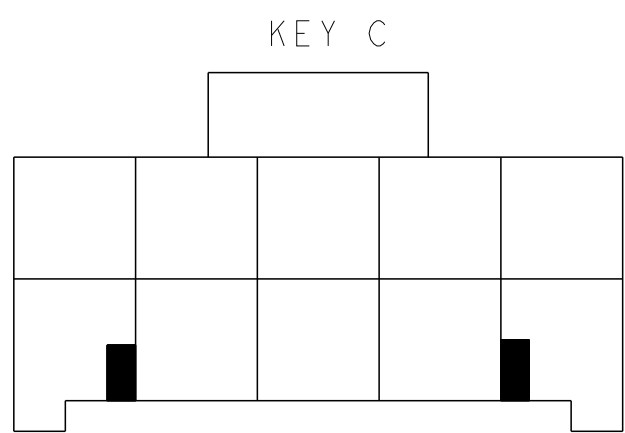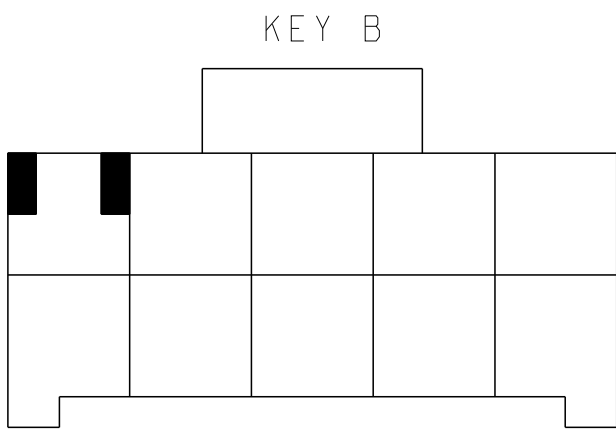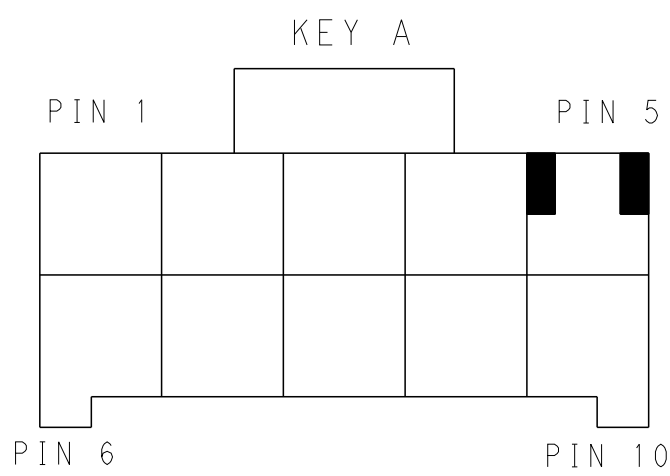



KEYING FOR 2*5 POS.

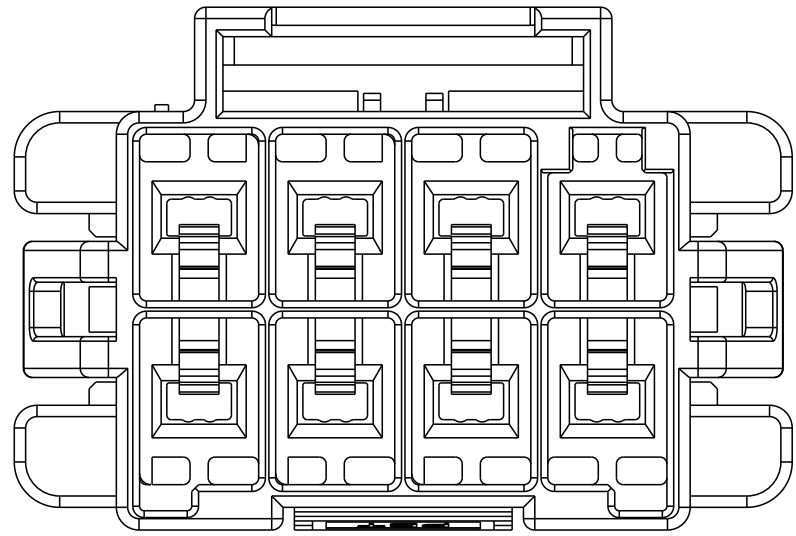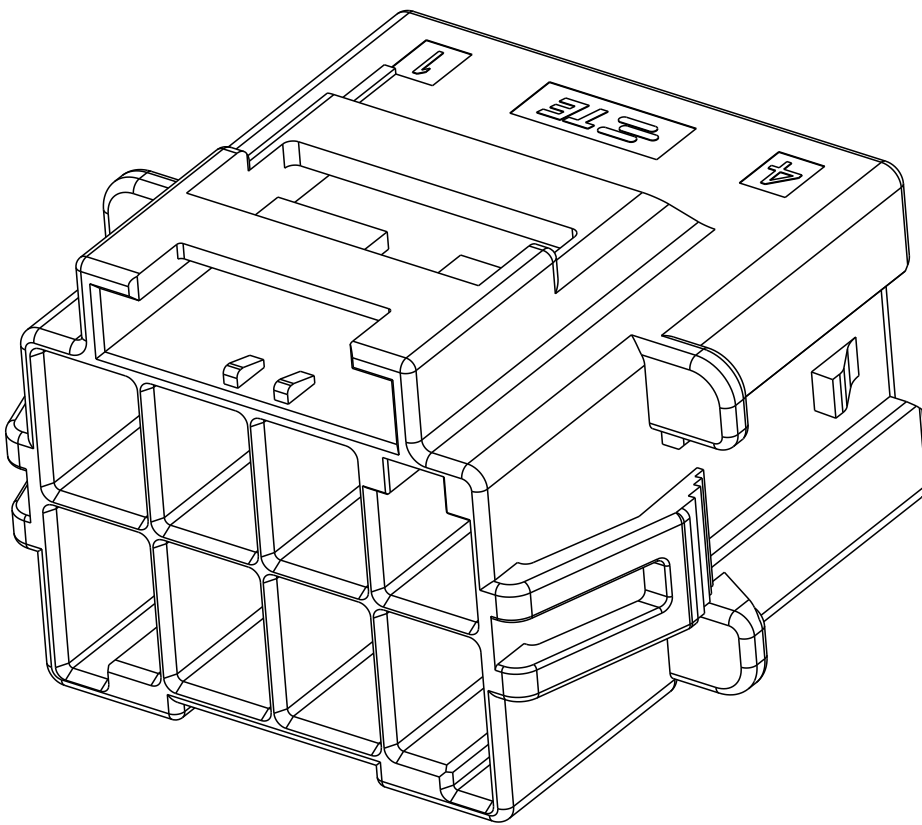





2*4 POSITIONS

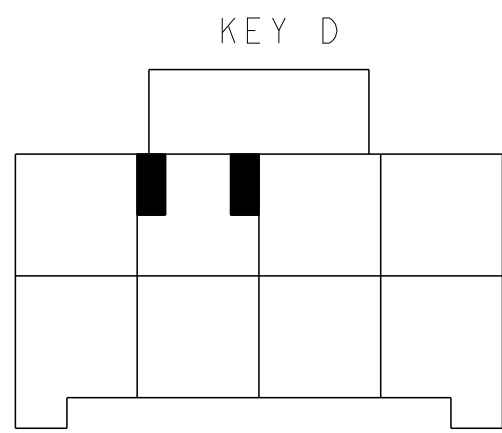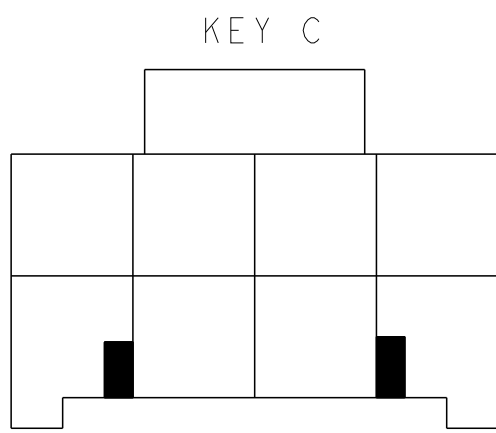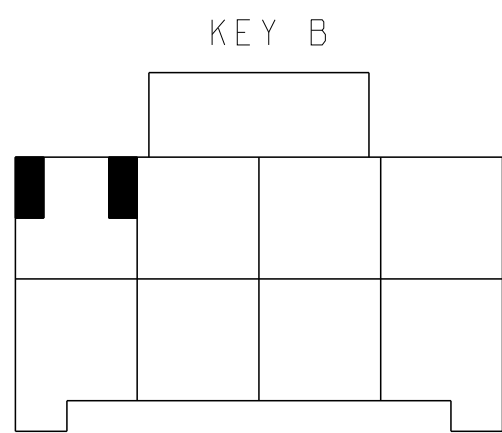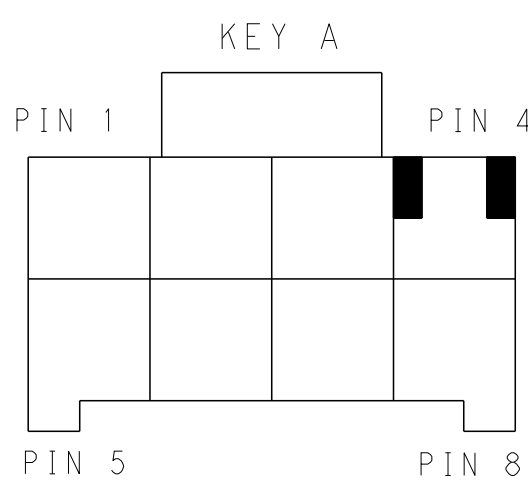



KEYING FOR 2*4 POS.

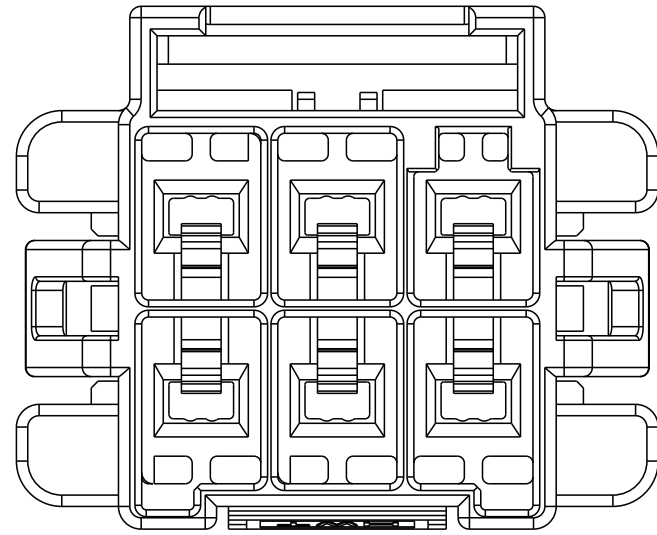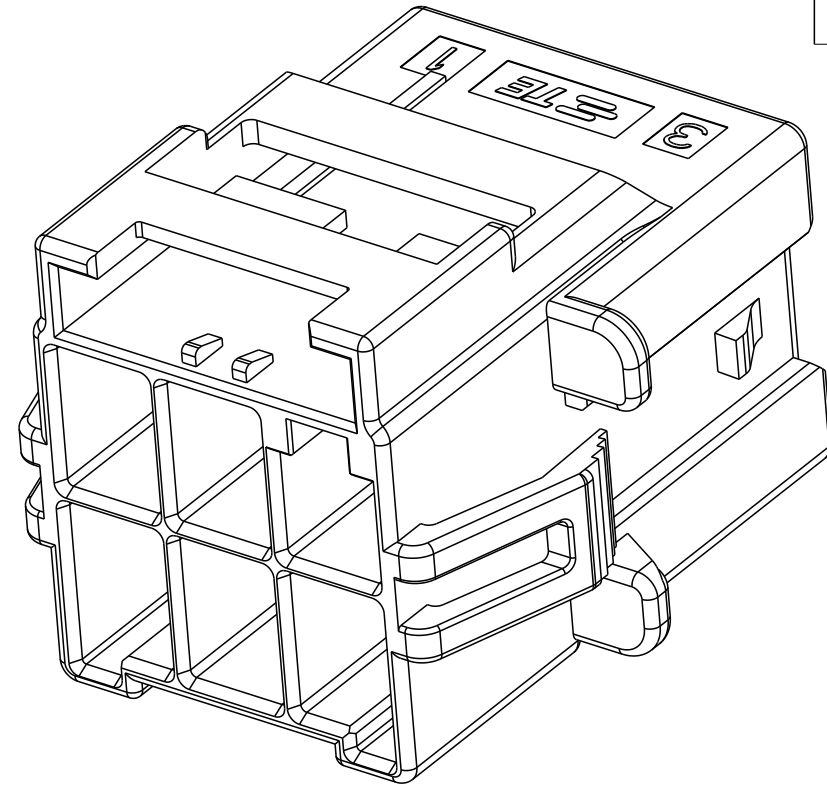





2*3 POSITIONS

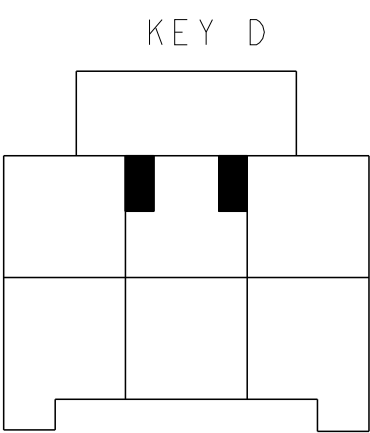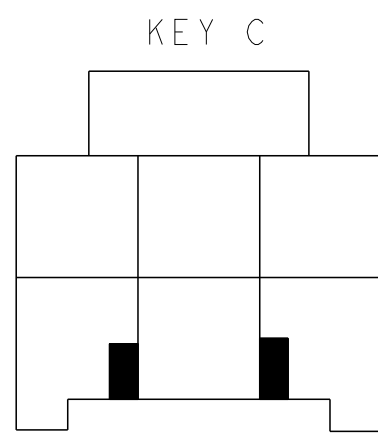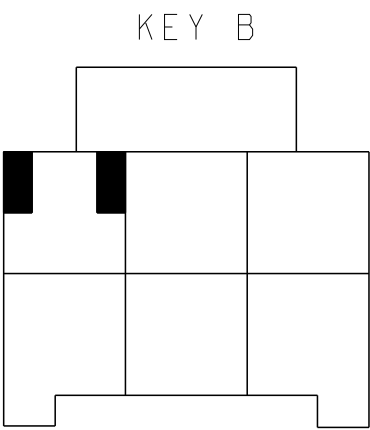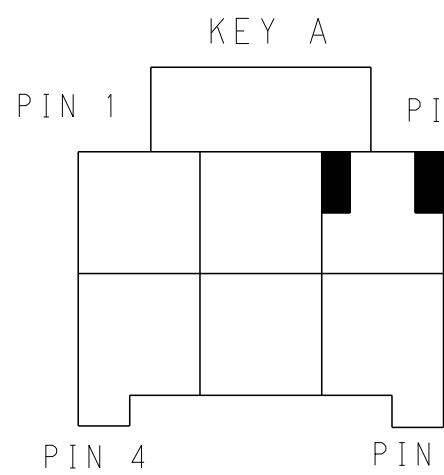

KEYING FOR 2*3 POS.

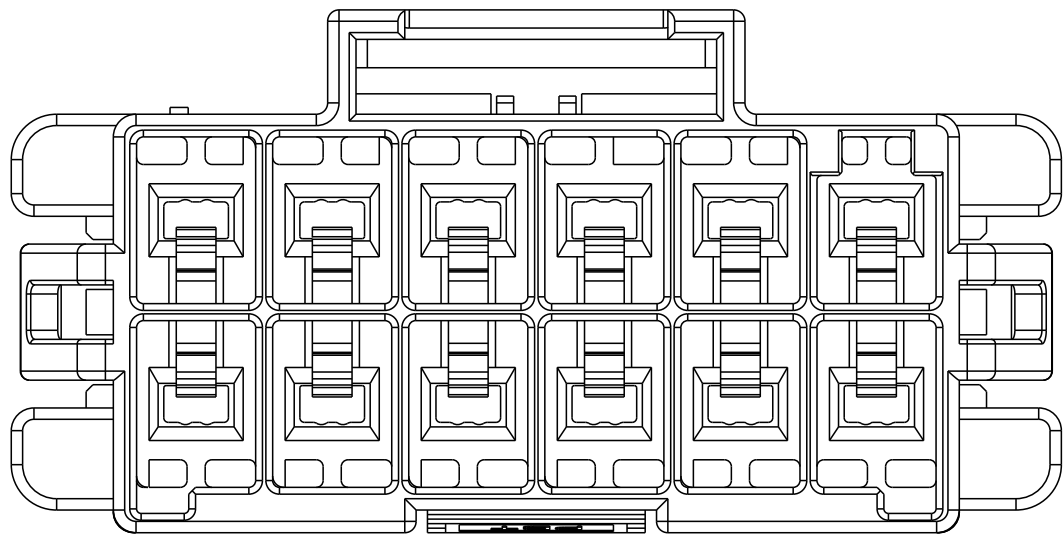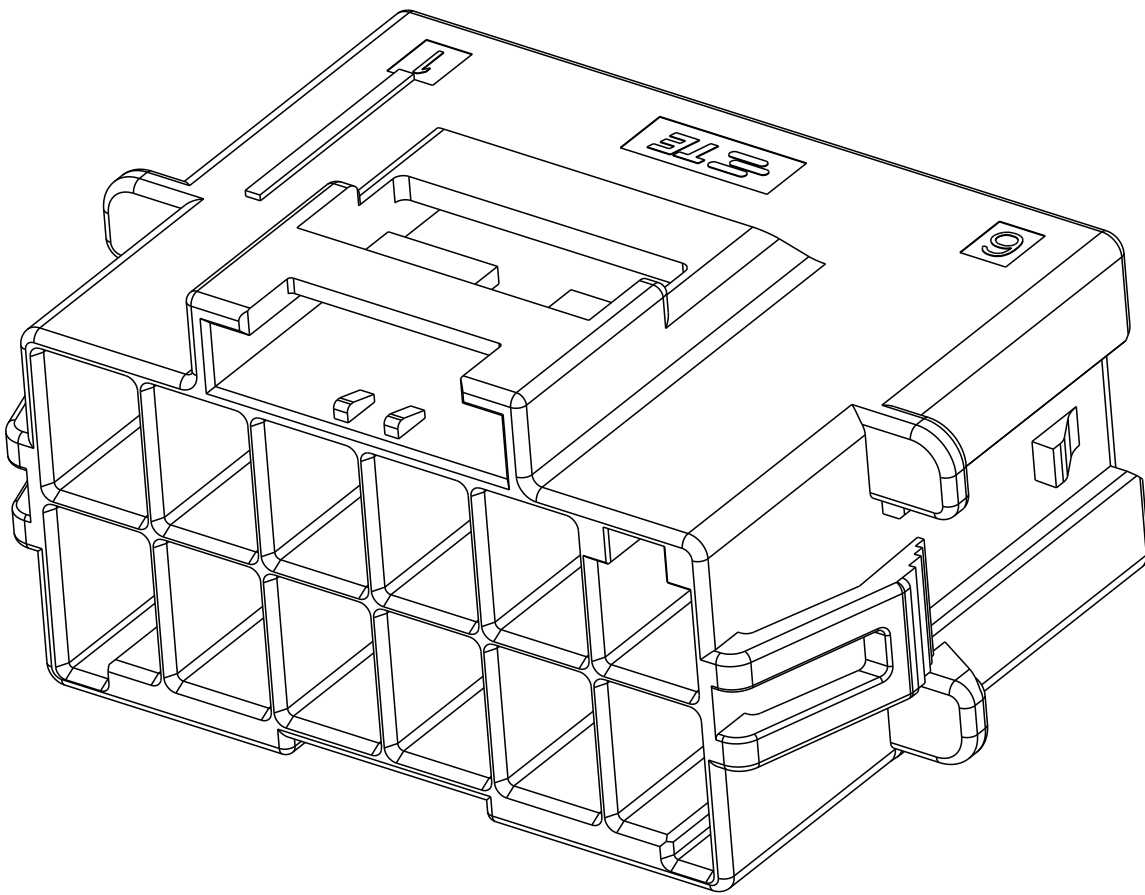

2*6 POSITIONS

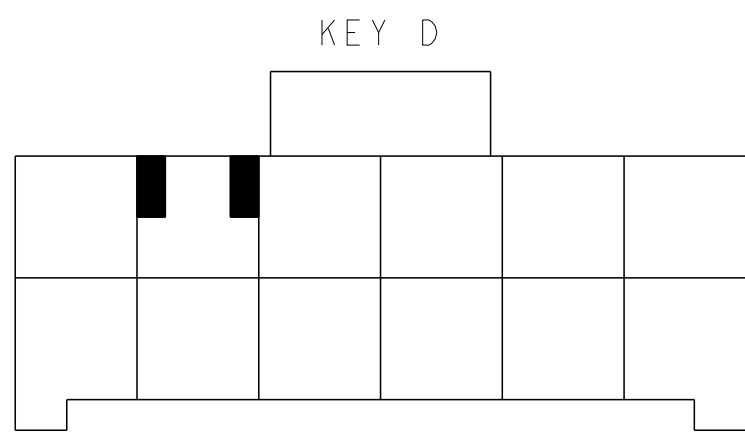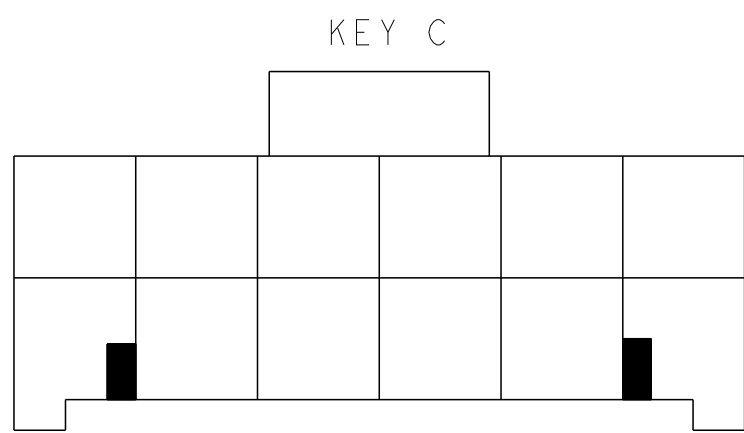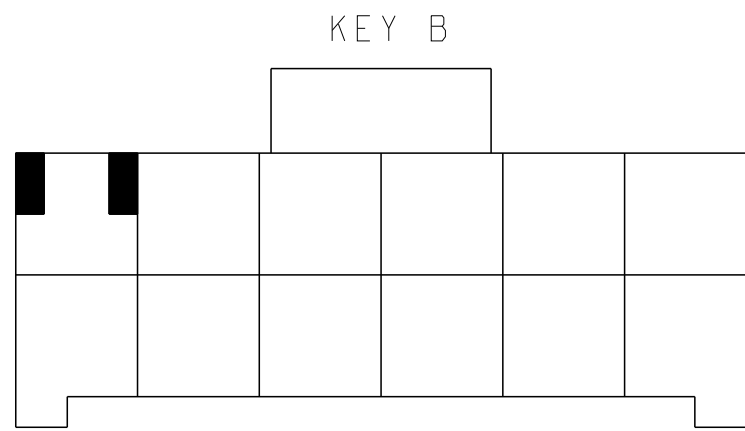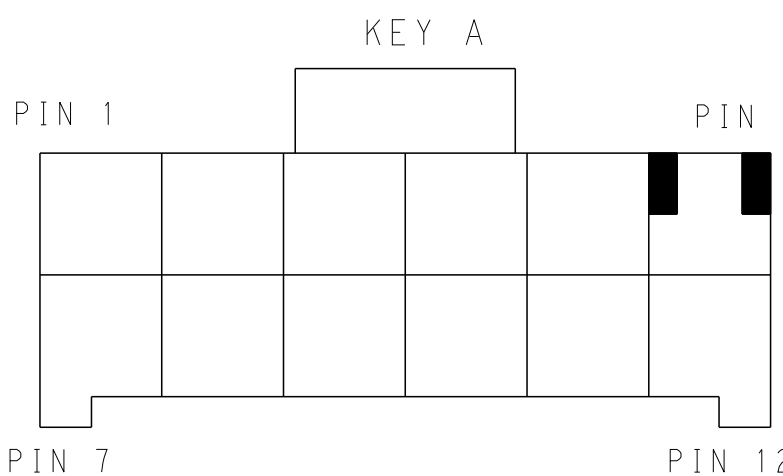

KEYING FOR 2*6 POS.

2*6	LEVEL 1	KEY A	1-1971775-6
		KEY B	2-1971775-6
LEVEL 2		KEY C	3-1971775-6
		KEY D	4-1971775-6
2*5	LEVEL 1	KEY A	5-1971775-6
		KEY B	6-1971775-6
LEVEL 2		KEY C	7-1971775-6
		KEY D	8-1971775-6
POS.	MATERIAL	KEY	P/N

2*4	LEVEL 1	KEY A	1-1971775-4
		KEY B	2-1971775-4
LEVEL 2		KEY C	3-1971775-4
		KEY D	4-1971775-4
2*3	LEVEL 1	KEY A	5-1971775-4
		KEY B	6-1971775-4
LEVEL 2		KEY C	7-1971775-4
		KEY D	8-1971775-4
POS.	MATERIAL	KEY	P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.

OWN TOMMY WU 06JUL2012

CHK HAPYE WU 06JUL2012

APVD YUHONG MAO 06JUL2012

DIMENSIONS:

mm

0 PLC ±.0

1 PLC ±0.35

2 PLC ±0.25

3 PLC ±.

4 PLC ±.

ANGLES ±.

FINISH -

TOLERANCES UNLESS OTHERWISE SPECIFIED:

PRODUCT SPEC 108-106118

APPLICATION SPEC 114-106118

WEIGHT -

Customer Drawing

NAME CAP HOUSING, PANEL MOUNT, DOUBLE ROW POWER TRIPLE LOCK

SIZE A1

CAGE CODE 00779

DRAWING NO. C=1971775

RESTRICTED TO -

TE Connectivity

SCALE -

SHEET 2 OF 2

REV C

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-1971775-6](#)