

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0015445162](#)  
**Status:** **Active**  
**Overview:** C-Grid Connector Products  
**Description:** 2.54mm Pitch C-Grid Receptacle, Through Hole, Dual Row, High Profile, Vertical, High-Temperature, 62 Circuits

**Documents:**

<a href="#">3D Model</a>	<a href="#">Product Specification PS-70181-001 (PDF)</a>
<a href="#">Drawing (PDF)</a>	<a href="#">Application Specification 713080001-AS-000 (PDF)</a>
<a href="#">3D Model (PDF)</a>	<a href="#">RoHS Certificate of Compliance (PDF)</a>

**Agency Certification**

CSA	LR19980
UL	E29179


**General**

Product Family	PCB Receptacles
Series	<a href="#">71850</a>
Application	Board-to-Board, Signal
Overview	<a href="#">C-Grid Connector Products</a>
Product Name	C-Grid
UPC	822350924191

**Physical**

Circuits (Loaded)	62
Circuits (maximum)	62
Color - Resin	Black
Durability (mating cycles max)	50
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	No
Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	5.081/g
Number of Rows	2
Orientation	Vertical
PC Tail Length	3.05mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.57mm
Packaging Type	Tray
Pitch - Mating Interface	2.54mm
Pitch - Termination Interface	2.54mm
Plating min - Mating	0.762µm
Plating min - Termination	1.905µm
Polarized to Mating Part	No
Polarized to PCB	No
Stackable	No
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	Through Hole

**Electrical**

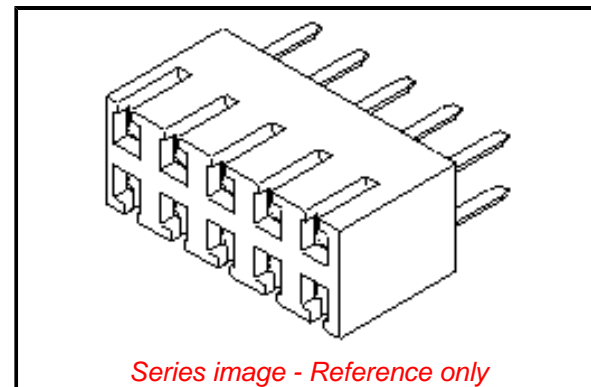

Series image - Reference only

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
ECHA\_01\_2020 (16  
January 2020

**Halogen-Free**

**Status**

**Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[71850 Series](#)

**Mates With**

[8624](#) , [70203](#) , [70246](#) Straight Header,  
[70247](#) Right Angle Header, [70287](#) , [70289](#)  
, [70227](#) , [70567](#) , [70280](#) , [70524](#) , [70260](#) ,  
[8723](#) , [70568](#) , [8724](#) , [71764](#) , [70229](#) , [70](#)  
[216](#) , [71308](#)

Current - Maximum per Contact	2.5A
Grounding to PCB	No
Voltage - Maximum	500V AC (RMS)

**Solder Process Data**

Duration at Max. Process Temperature (seconds)	040
Lead-free Process Capability	SMC&WAVE
Max. Cycles at Max. Process Temperature	003
Process Temperature max. C	260

**Material Info**

Engineering Number	71850-0222
--------------------	------------

**Reference - Drawing Numbers**

Application Specification	713080001-AS-000
Product Specification	PS-70181-001
Sales Drawing	SDA-71850-0XXX

This document was generated on 03/27/2020

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[15-44-5162](#)