

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0464373006

Status:

Active

Overview:

EXTreme Ten60Power High-Current Connector

Description:

2.54mm, 5.50mm Pitch EXTreme Ten60Power Right-Angle Plug Assembly with Guide Pins, 24 Signal Circuits, 6 DC Power Circuits


Documents:

3D Model

Drawing (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification	
CSA	LR19980
UL	E29179
General	
Product Family	PCB Headers
Series	46437
3D Viewer	Yes
Application	Board-to-Board, Power, Signal
CURRENT-MAX-NUMERIC	2.5, 60.0
Comments	See PS-46436-100 for details, See PS-46436-100 for details
Overview	EXTreme Ten60Power High-Current Connector
PITCH-MATING-NUMERIC	2.54, 5.50
Product Name	EXTreme Ten60Power
UPC	883906918002
Physical	
(p)ower-(s)ignal Configuration	24s - 6p
Breakaway	No
Circuits (Loaded)	30
Circuits (maximum)	30
Color - Resin	Black
Durability (mating cycles max)	200
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	Yes
Keying to Mating Part	None
Lock to Mating Part	No
Mated Height	18.00mm
Material - Metal	Copper
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	23.798/g
Number of Rows	1, 3
Orientation	Right Angle
PC Tail Length	2.84mm
PCB Locator	Yes
PCB Retention	None
PCB Thickness - Recommended	1.58mm
Packaging Type	Tray
Pitch - Mating Interface	2.54mm, 5.50mm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	No

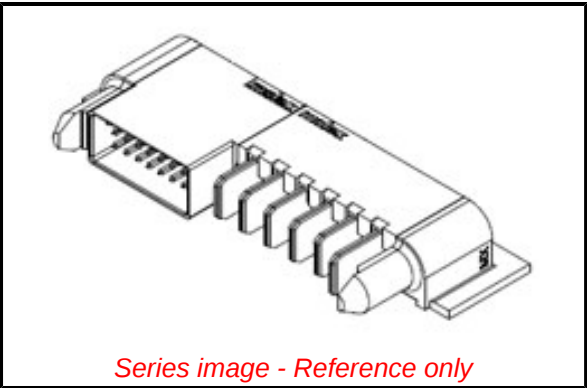

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -ED/88/2018 (15 January 2019)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

Search Parts in this Series

46437 Series

Mates With

EXTreme Ten60Power Vertical Receptacle 464363006 , 465623006

Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	Through Hole
Electrical	
Current - Maximum per Contact	2.5A, 60.0A
Voltage - Maximum	600V AC / 250V DC
Solder Process Data	
Duration at Max. Process Temperature (seconds)	010
Lead-freeProcess Capability	SMC&WAVE
Max. Cycles at Max. Process Temperature	003
Process Temperature max. C	260
Material Info	

This document was generated on 10/03/2019

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[46437-3006](#)