

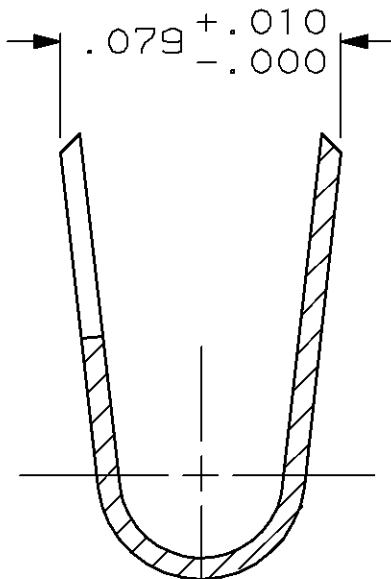


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION ,19 .
© COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.


LOC	DIST	P	F	REVISIONS				
				ZONE	LTR	DESCRIPTION	DATE	APPD
AR	39				C	REDRAW PER ECN 2252	1/12/89	KIH
				D	REV PER ECN AR2719	11-01-89	KIH	
				E	REV PER ECN BD3842	4-18-90	-	
				F	REV PER EC 0020-1550-93	01/25/94	GDM	

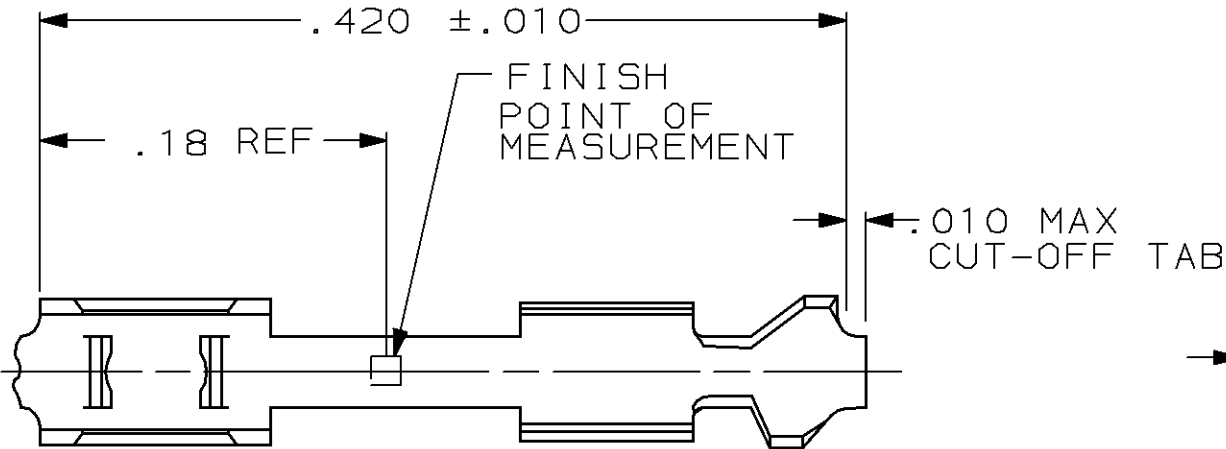

- 1 SPLICE IS DESIGNED FOR USE WITH FLEXIBLE FLAT CONDUCTOR CABLE HAVING .015 MAX. THICKNESS AND .060-.065 WIDE CONDUCTORS ON .100 MIN. CENTER TO CENTER SPACING.
- 2 OBSOLETE PART NUMBER

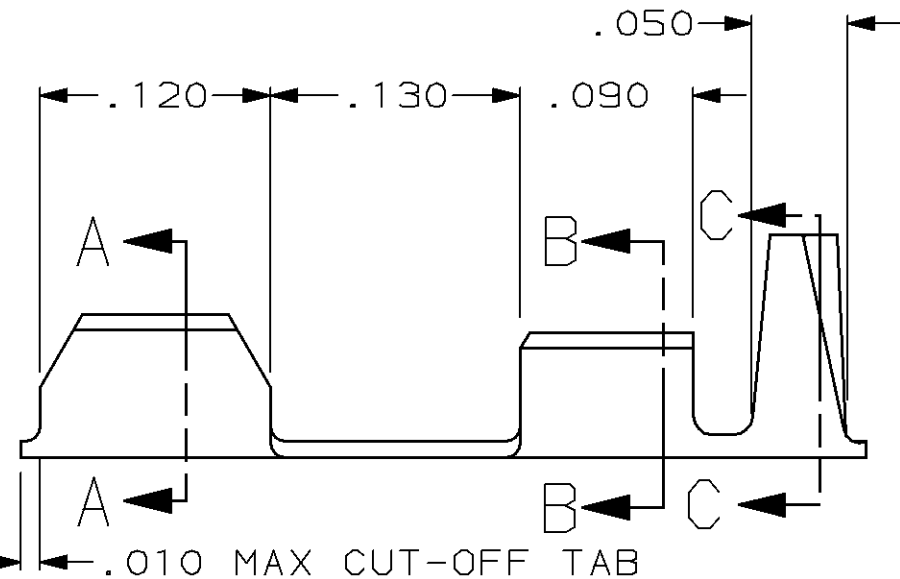

SECT. C-C
INSULATION RANGE
Ø.035-.060
SCALE 20:1

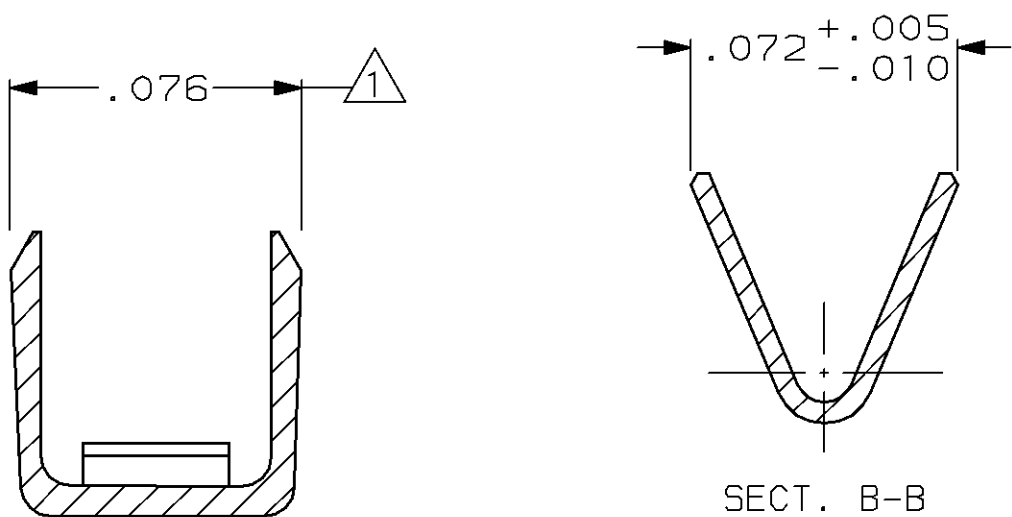

SECT. A-A
SCALE 20:1

SECT. B-B
WIRE RANGE
#22-#26 AWG.
SCALE 20:1

BRIGHT TIN/LEAD .000100 MIN THK OVER NICKEL .000050 MIN THK OVER ENTIRE CONTACT		86774-2	
GOLD .000015 OVER NICKEL .000050 MIN THK ON ENTIRE CONTACT		86774-1	
FINISH		PART NO	
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES TOLERANCES ON: 2 PLC DEC ± - 3 PLC DEC ± .005 ANGLES ± -	DR 1-12-89 K. HELM	AMP AMP INCORPORATED Harrisburg, Pa. 17105	
	CHK 2-14-89 D.L. ROCKER		
	APPD 2-17-89 W.T. PARKER		
	APPD 2-16-89 G.D. MILLER		
MATERIAL PHOSPHOR BRONZE	PRODUCT SPEC 108-9024	NAME SPLICE CONTACT, STD CRIMP FLAT CABLE TO ROUND WIRE 26-22 AWG, LOOSE PIECE	
FINISH SEE CHART	APPLICATION SPEC 114-16002,03	SIZE B	FSCM NO 00779
	WEIGHT -	DRAWING NO 86774	SCALE 10:1
		SHEET 1 OF 1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[86774-1](#)