
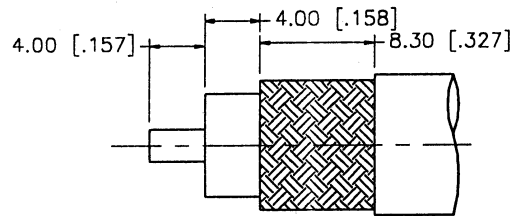

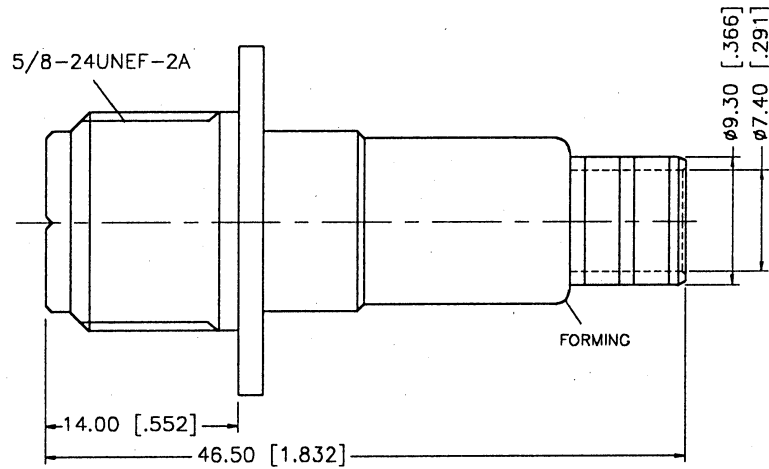



REV.	DATE	DESCRIPTION
NC	01/04/00	INITIAL RELEASE

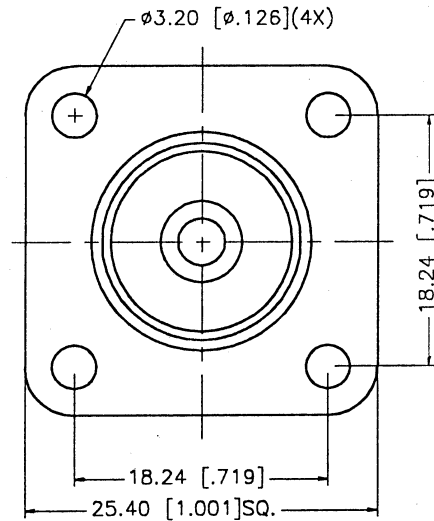

RECOMMENDED
CABLE STRIPPING DIM'S

NOTES:

1. CRIMP FERRULE
HEX CRIMP SIZE .429"
2. CENTER CONTACT
HEX CRIMP SIZE .100"

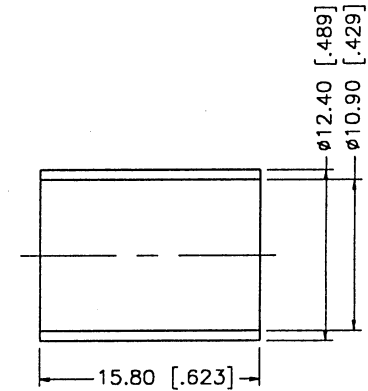

DESCRIPTION	MATERIAL	FINISH	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS	APPROVALS	DATE	Amphenol Connex			
1 BODY	BRASS	NICKEL	DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY	DRAWN G.R.S.	01/04/00				
2 INSULATOR	TEFLON	NATURAL		CHECKED		TITLE UHF PANEL CRIMP JACK (FOR RG-8/U CABLE)			
3 CONTACT PIN	BRASS	GOLD	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5-6 = ± 0.2 6-30 = ± 0.4 30-120 = ± 0.6 120-315 = ± 1 315-1000 = ± 1.6 1000-2000 = ± 2.4	ISSUED					
4 BARREL	BRASS	NICKEL				SIZE	FSCM NO.	DWG. NO.	REV.
5 CONTACT PIN	BRASS	GOLD				A	99001	182129.DWG	NC
6 FERRULE	COPPER	NICKEL				SCALE NA	PART NO.	182129	SHEET 1 OF 1
7			DO NOT SCALE DRAWING						
8									

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[182129](#)