

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0716612360

Status:

Active

Overview:

EBBI 50D Connector System

Description:

1.27mm Pitch EBBI 50D Plug, Right-Angle, 60 Circuits, 3.18mm PC Tail Length

Documents:

3D Model

RoHS Certificate of Compliance (PDF)

Drawing (PDF)

Agency Certification

CSA

LR19980

UL

E29179

General

Product Family

PCB Headers

Series

71661

Application

Board-to-Board, Signal, Wire-to-Board

Overview

EBBI 50D Connector System

Product Name

EBBI

UPC

756054202692

Physical

Breakaway

No

Circuits (Loaded)

60

Circuits (maximum)

60

Color - Resin

Black

Durability (mating cycles max)

2000

First Mate / Last Break

No

Flammability

94V-0

Glow-Wire Capable

No

Guide to Mating Part

No

Keying to Mating Part

None

Lock to Mating Part

Yes

Material - Metal

Brass

Material - Plating Mating

Gold

Material - Plating Termination

Tin

Material - Resin

High Temperature Thermoplastic

Net Weight

5.062/g

Number of Rows

4

Orientation

Right Angle

PC Tail Length

3.18mm

PCB Locator

Yes

PCB Retention

Yes

PCB Thickness - Recommended

1.60mm

Packaging Type

Tray

Pitch - Mating Interface

1.27mm

Pitch - Termination Interface

1.27mm

Plating min - Mating

0.762µm

Plating min - Termination

1.270µm

Polarized to Mating Part

Yes

Polarized to PCB

Yes

Shrouded

Fully

Stackable

No

Surface Mount Compatible (SMC)


No

Temperature Range - Operating

-40° to +105°C

Termination Interface: Style

Through Hole

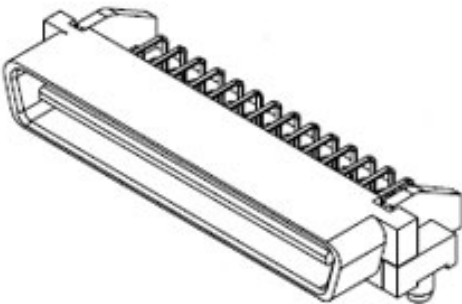

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

REACH SVHC

Not Contained Per
-ED/88/2018 (15
January 2019)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

Search Parts in this Series

71661 Series

Mates With

EBBI 50D Receptacle 71660 , 87552

Electrical

Current - Maximum per Contact	1.0A
Voltage - Maximum	30V

Solder Process Data

Lead-freeProcess Capability	SMC&WAVE
Process Temperature max. C	235

Material Info

Reference - Drawing Numbers

Sales Drawing	SDA-71661-2XXX
---------------	----------------

This document was generated on 02/26/2019

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[71661-2360](#)