
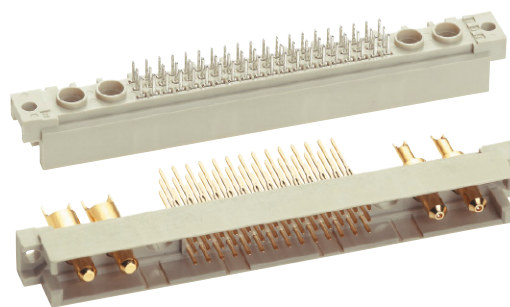


























Number of contacts

78+2, 60+4, 42+6, 24+8, 6+10



Male connectors

Identification			No. of contacts	Contact arrangement	Part number	Performance levels according to IEC 60603-2. Explanation chapter 00		
					3	2	1	
Male connector with solder pins 2.5 mm	78 + 2		Performance level 3 on request	09 73 178 6902	Performance level 1 on request			
	60 + 4			09 73 160 6902				
	42 + 6			09 73 142 6902				
	24 + 8			09 73 124 6902				
	6 + 10			09 73 106 6902				
Male connector with solder pins 4.0 mm	78 + 2			09 73 178 6903				
	60 + 4			09 73 160 6903				
	42 + 6			09 73 142 6903				
	24 + 8			09 73 124 6903				
	6 + 10			09 73 106 6903				
Male connector with solder pins 6.0 mm	78 + 2			09 73 178 6991				
	60 + 4			09 73 160 6991				
	42 + 6			09 73 142 6991				
	24 + 8			09 73 124 6991				
	6 + 10			09 73 106 6991				
Male connector with wrap posts 13 mm	78 + 2			09 73 178 6907				
	60 + 4			09 73 160 6907				
	42 + 6			09 73 142 6907				
	24 + 8			09 73 124 6907				
	6 + 10			09 73 106 6907				
Male connector with press-in pins 13 mm (5.0 mm on request)	78 + 2			09 73 178 6974●				
	60 + 4			09 73 160 6974●				
	42 + 6			09 73 142 6974●				
	24 + 8			09 73 124 6974●				
	6 + 10			09 73 106 6974●				

Male connectors with 17 mm wrap posts on request

● Wrap posts for interfacing selectively gold plated (performance level 3)

Other contact arrangements on request

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

HARTING:

09791962950 09791962961