
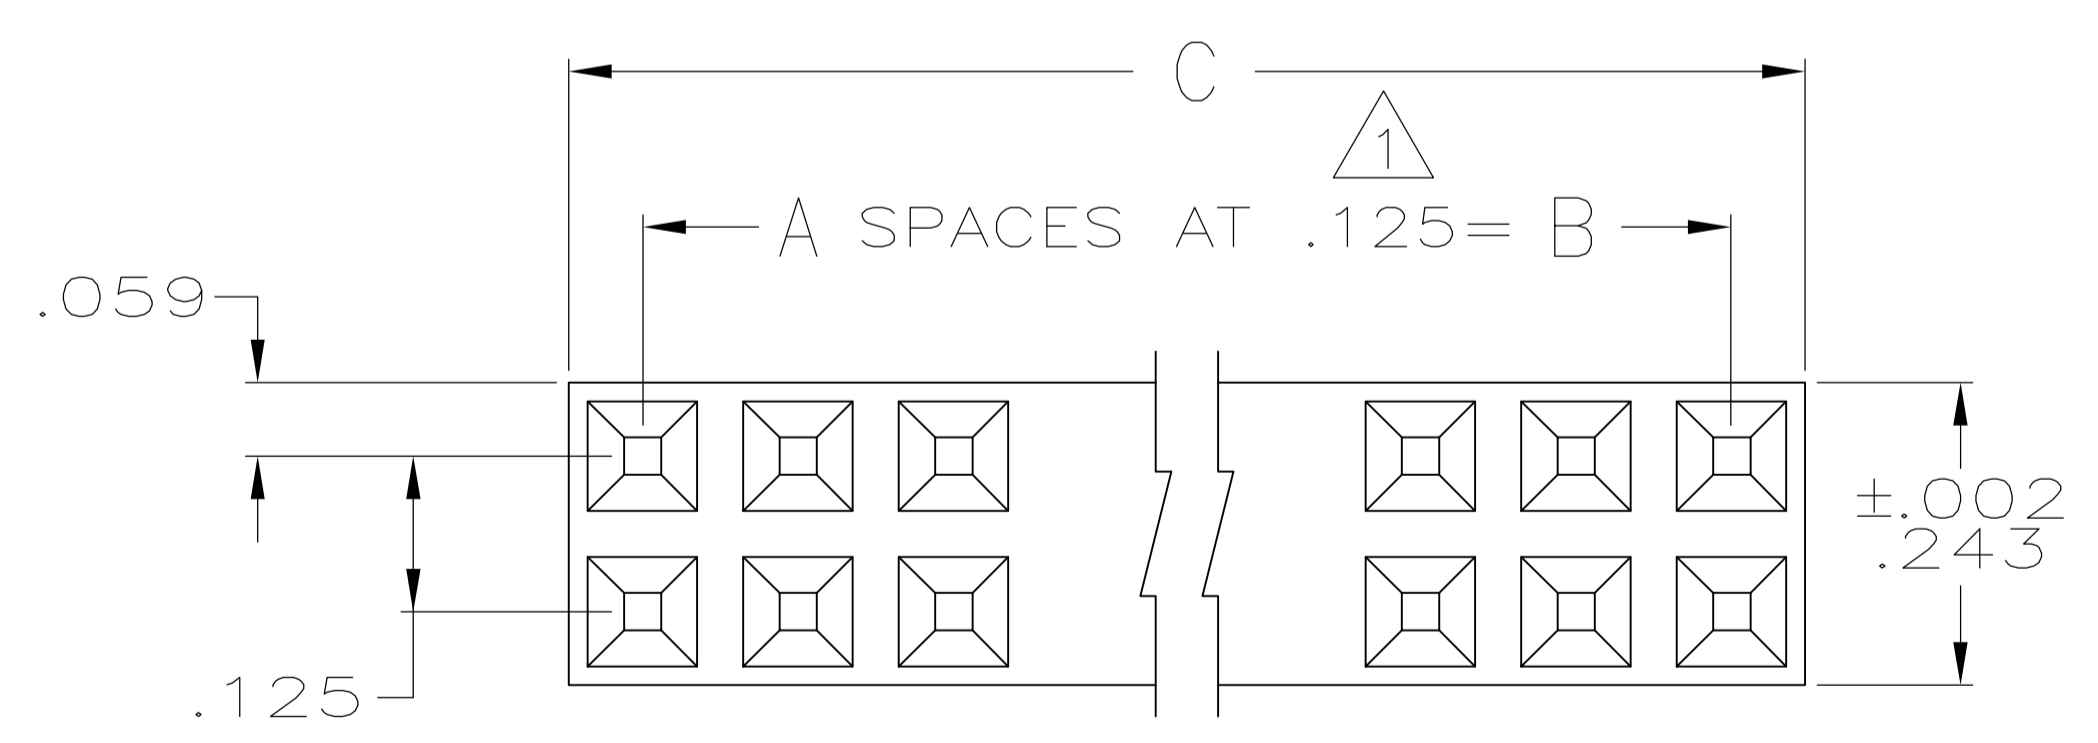
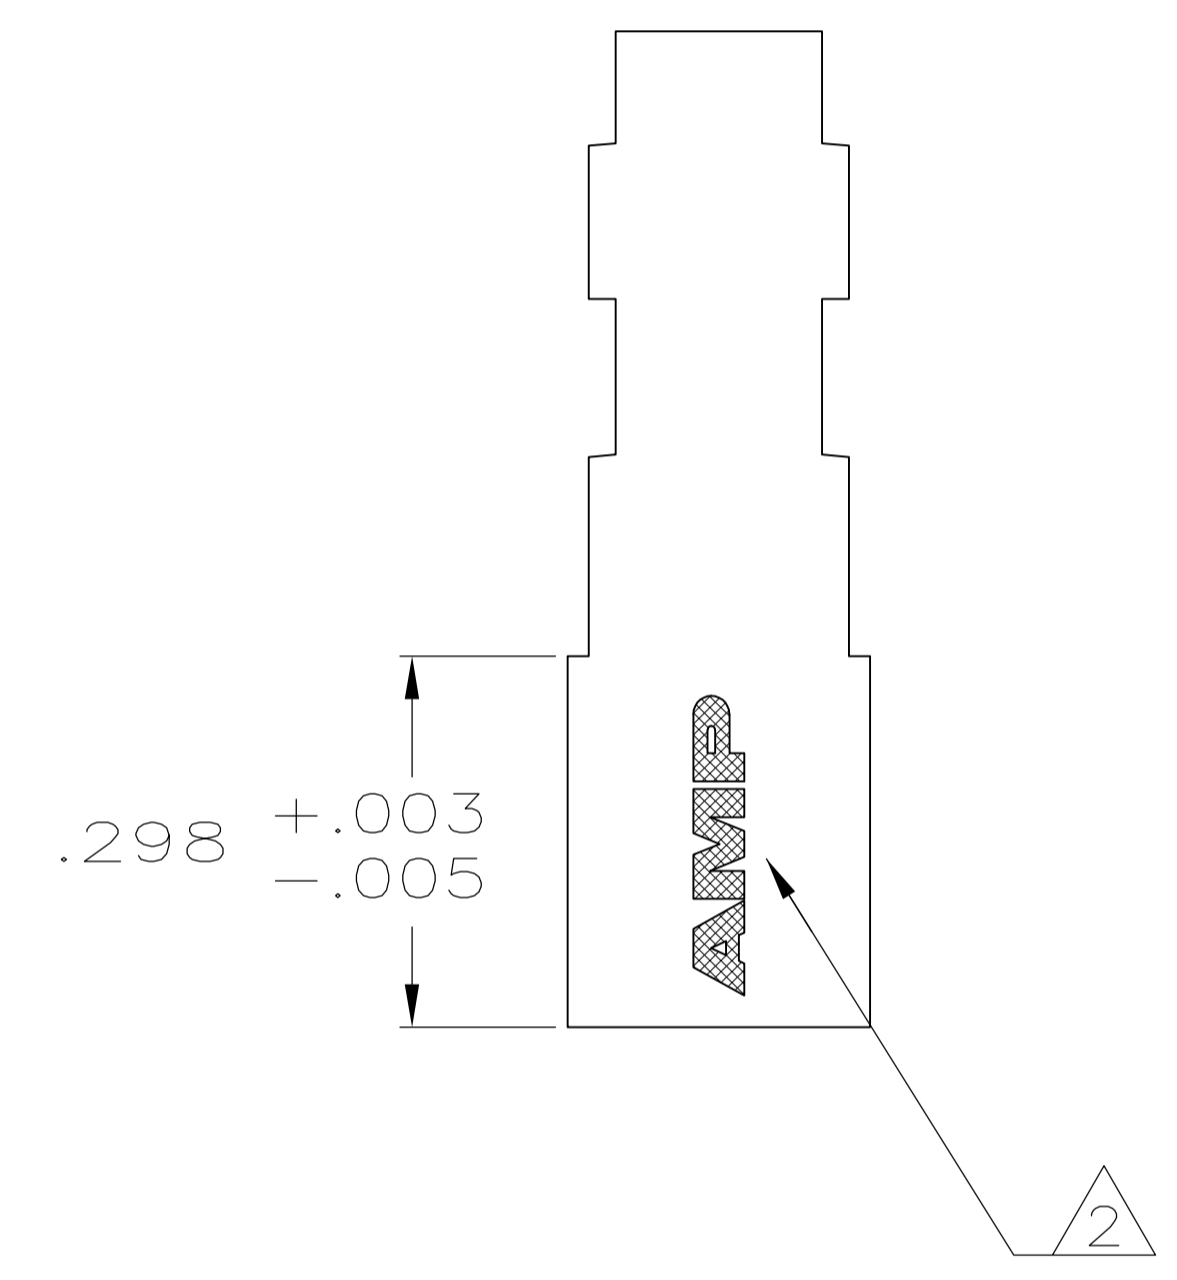


- ① CAVITY LOCATION DIMENSIONS INCREASE IN INCREMENTS OF .125 - TOLERANCE NON-CUMULATIVE
- ② AMP LOGO MOLDED IN APPROXIMATE AREA SHOWN.
- ③ .000050 GOLD IN CONTACT AREA, .000100-.000200 TIN ON THE TERMINATION AREA, ALL OVER .000050 NICKEL
- ④ .000030 GOLD IN CONTACT AREA, .000100-.000200 TIN ON THE TERMINATION AREA, ALL OVER .000050 NICKEL.

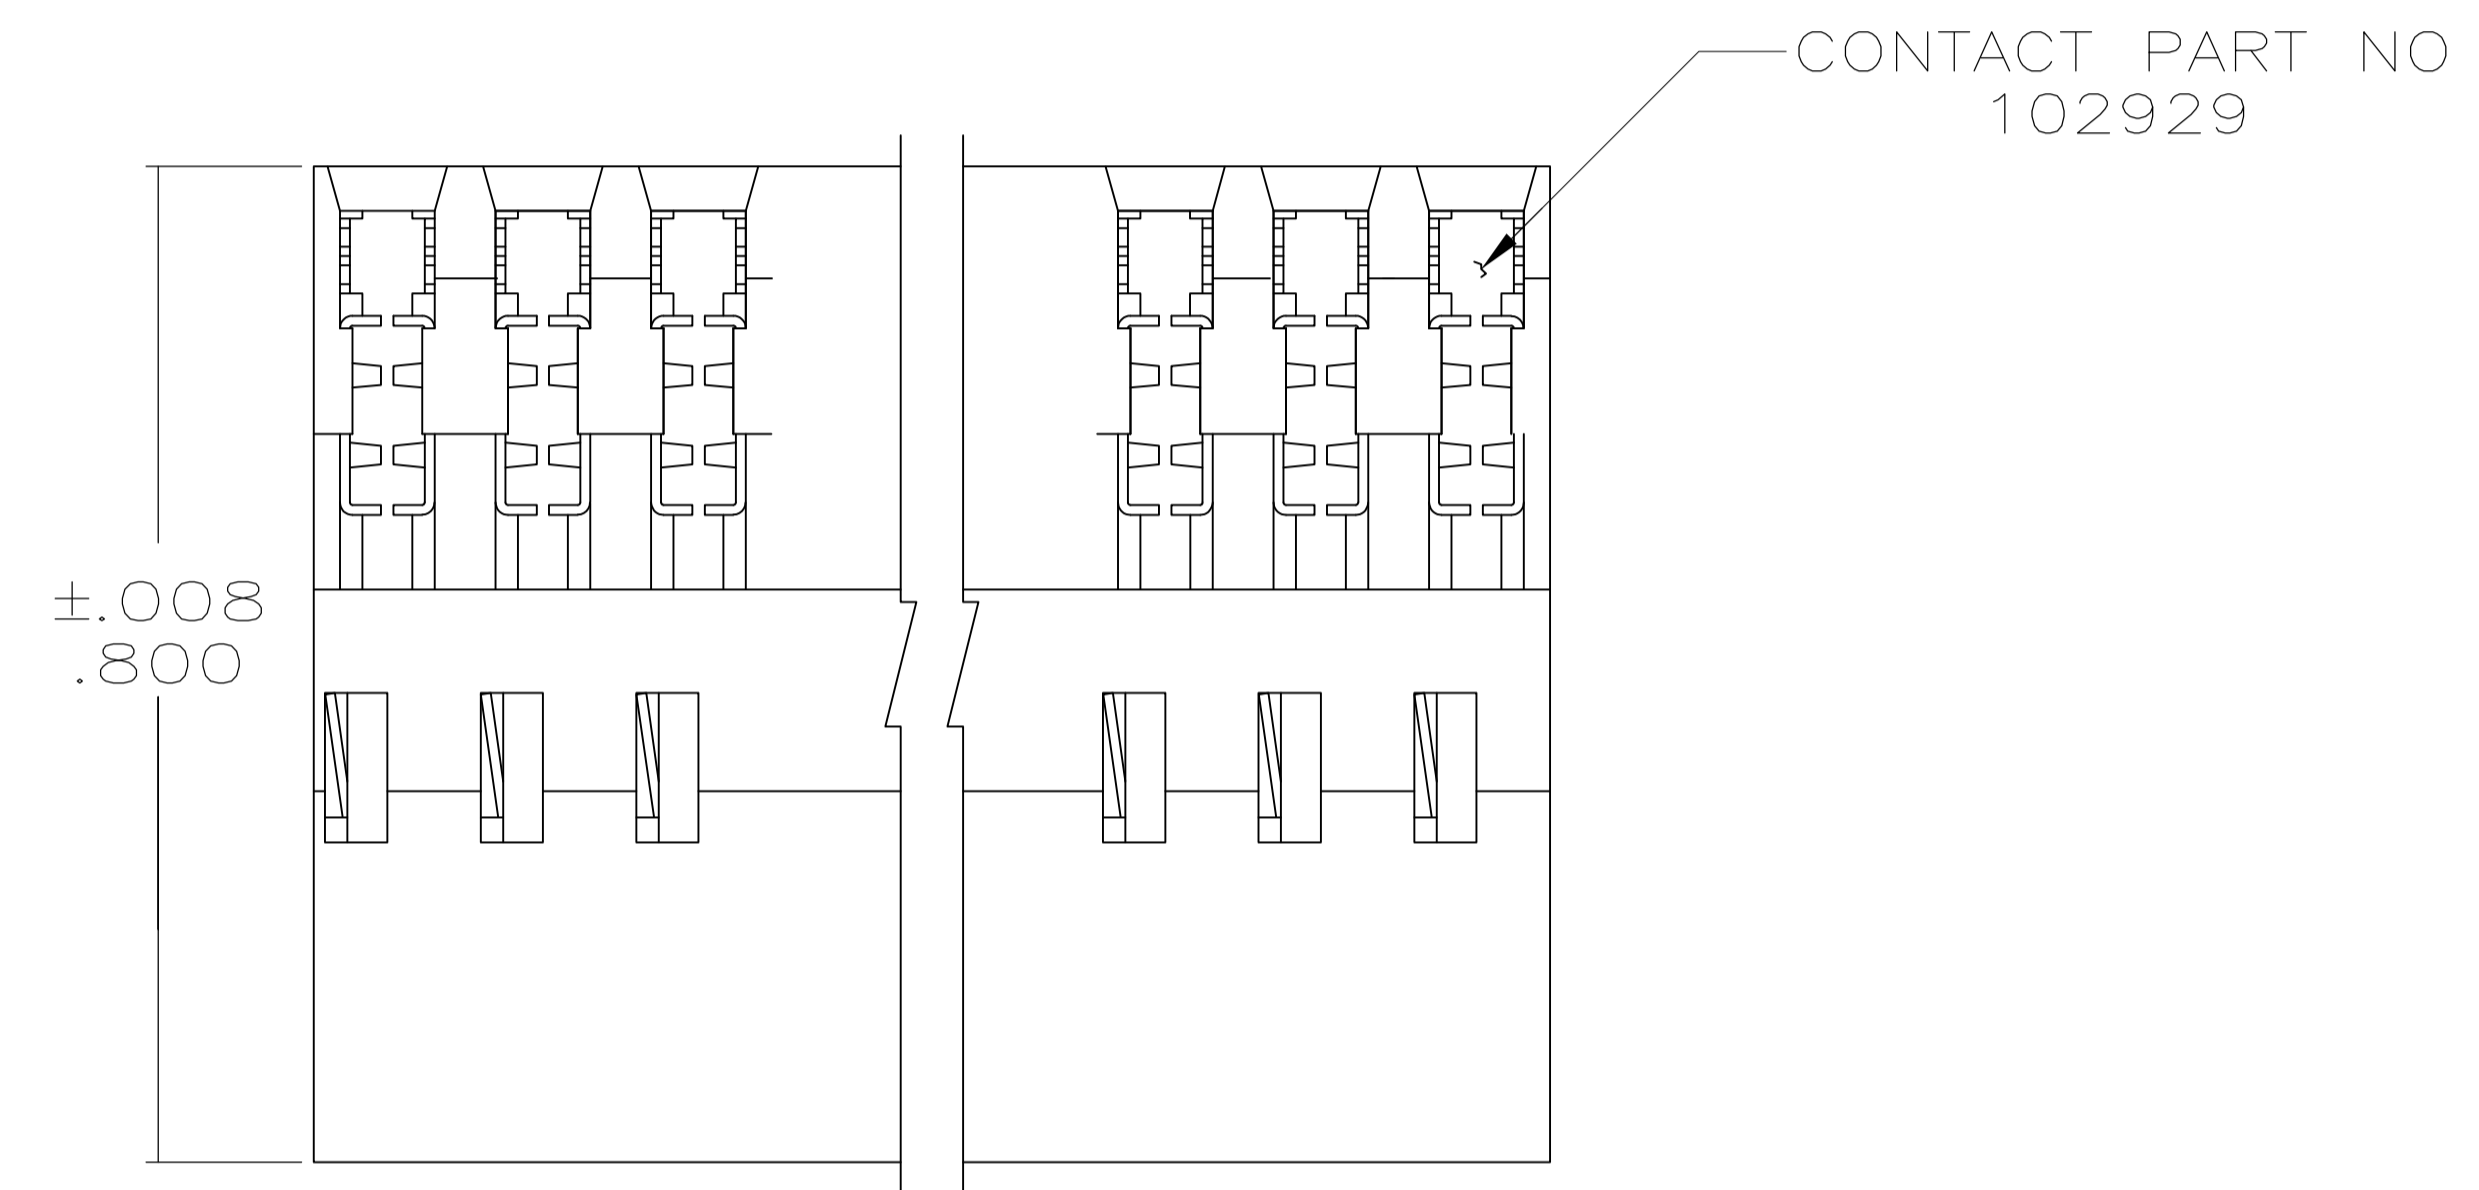

	④	1.868	1.750	14	30	5-5102935-7
	③	2.493	2.375	19	40	3-5102935-6
	③	1.993	1.875	15	32	2-5102935-8
	③	1.493	1.375	11	24	1-5102935-9
	③	1.243	1.125	7	20	1-5102935-6
	③	.993	.875	9	16	1-5102935-2
	③	.743	.625	5	12	5102935-8
	③	.618	.500	4	10	5102935-6
	③	.493	.375	3	8	5102935-4
	③	.368	.250	2	6	5102935-2
REMARKS	FINISH	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. ALL RIGHTS RESERVED.

DMN: S. BURKHOLDER 04OCT2004  
 CHK: M. YEOMANS 22NOV04  
 APVD: M. YEOMANS 22NOV04

NAME: RECEPTACLE ASSY, LEVEL V  
 DOUBLE ROW, .125 x .125 CL  
 #22 - #26 Gage, LEAD FREE

PRODUCT SPEC: APPLICATION SPEC

SIZE: A1 00779 C=5102935  
 WEIGHT: --

CUSTOMER DRAWING SCALE: 4:1 SHEET 1 OF 1 REV D2

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-5102935-8](#)