





INCH	MM
.005	0.13
.015	0.38
.060	1.52
.156	3.97
.380	9.65
.443	11.25
.448	11.38
.505	12.83
.510	12.95
.562	14.27
.584	14.83
1.284	32.61

DASH NO	MODEL NO	IMPD OHMS
-1	BJ224	50
-2	UBJ224	75

DATA CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO TROMPETER ELECTRONICS INC. AND SHALL NOT BE DISCLOSED, COPIED OR USED FOR PROCUREMENT OR MANUFACTURE WITHOUT EXPRESS WRITTEN PERMISSION.

REVISIONS			
REV	DESCRIPTIONS	DATE	APPROVED
A	PRODUCTION RELEASE	10/11/00	

RED INDICATES ORIGINAL

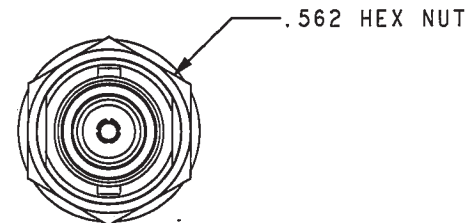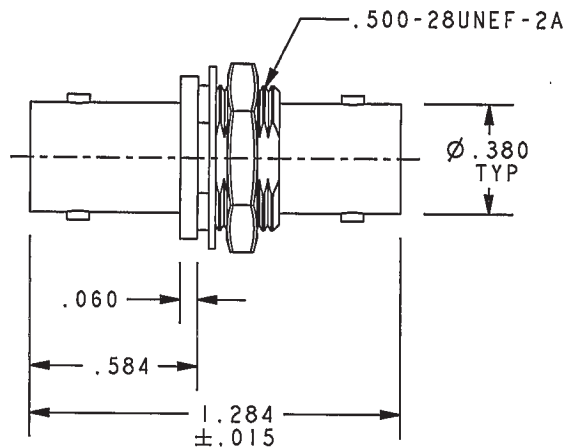

SCALE: 1/1
RECOMMENDED PANEL CUTOUT

4. SOCKET CONTACT COAXIAL BNC TYPE
NON-INSULATED FEED THRU BULKHEAD
JACK, 50 AND 75 OHM VERSIONS
3. MAX PANEL THK: .156
2. FINISH: TFS-1A, (NICKEL)
1. ALL DIM ARE IN INCHES

NOTES: UNLESS OTHERWISE SPECIFIED.

INTERPRET DRAWING PER MIL-STD-100. DIMENSIONS ARE IN INCHES AND INCLUDE FINISH THICKNESS UNLESS OTHERWISE SPECIFIED.		TOL: UNLESS SPECIFIED. .XX ± .02 .XXX ± .010 ANGLE ± 1°			
MATERIAL:		FINISH:			
DRN	R L	10/11/00		TITLE: BJ224/UBJ224	
CHK	APPROVED	10/12/00		SIZE	A 14949
CAGE CODE		DRAWING NO.		DATE	10/13/00
SHEET		1C		SCALE	2/1
NEXT ASSY		1-0590		DO NOT SCALE DWG	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions:](#)

[UBJ224](#)