

# Features


# Regulated Converter

- 40mW max. no load power consumption
- High efficiency up to 76%
- Isolated output 3kVAC / 1 min
- SCP, OVP protection
- Wide operating temperature range: -40°C to +85°C
- Universal input 85-305VAC

# RECOM AC/DC Converter

## RAC03-SER/277

### 3 Watt Single Output

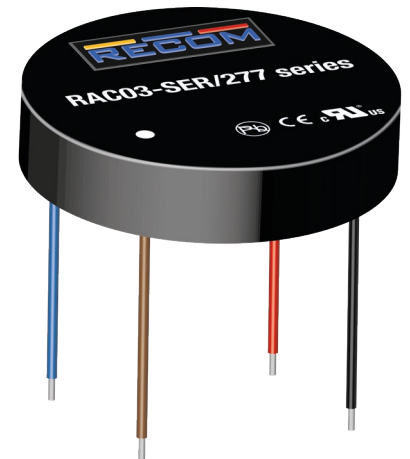

UL60950-1 certified  
 CAN/CSA-22.2 No. 60950 certified  
 EN60335-1 certified  
 IEC/EN60950-1 certified  
 CB Report  
 EN55032 certified  
 EN55024 certified  
 EN55014 certified

### Description

The modules of the RAC03-SER/277 series are regulated AC/DC converters with 3kVAC isolation and a round, flat shape. This series has been designed to offer low stand-by consumption and an ultra-wide input voltage range. Uses include a variety of applications in building automation, security systems and communication systems.

### Selection Guide

| Part Number      | Input Voltage Range [VAC] | Output Voltage [VDC] | Output Current [mA] | Efficiency typ <sup>(1)</sup> [%] | Max. Capacitive Load <sup>(2)</sup> [µF] |
|------------------|---------------------------|----------------------|---------------------|-----------------------------------|--|
| RAC03-3.3SER/277 | 100-277                   | 3.3                  | 900                 | 68                                | 22000                                    |
| RAC03-05SER/277  | 100-277                   | 5                    | 600                 | 70                                | 7500                                     |
| RAC03-12SER/277  | 100-277                   | 12                   | 250                 | 74                                | 1000                                     |
| RAC03-24SER/277  | 100-277                   | 24                   | 125                 | 76                                | 200                                      |

#### Notes:

Note1: Efficiency is tested at nominal input and full load at +25°C ambient

Note2: Max Cap Load is tested at nominal input and full resistive load

### Model Numbering



#### Notes:

Note3: add suffix "-TRAY" for Tray packaging, without suffix standard cardboard box packaging

#### Ordering Examples:

|                      |        |        |               |                |
|----------------------|--------|--------|---------------|----------------|
| RAC03-05SER/277      | 3 Watt | 5Vout  | Single Output | cardboard box  |
| RAC03-12SER/277      | 3 Watt | 12Vout | Single Output | cardboard box  |
| RAC03-05SER/277-TRAY | 3 Watt | 5Vout  | Single Output | tray packaging |

**Specifications** (measured @ Ta= 25°C, nom. Vin (115/230VAC), full load and after warm-up unless otherwise stated)

### BASIC CHARACTERISTICS

| Parameter                              | Condition                | Min.             | Typ.                 | Max.             |
|--|--------------------------|------------------|----------------------|------------------|
| Input Voltage Range <sup>(4)</sup>     | nom. Vin= 230VAC         | 85VAC<br>120VDC  | 277VAC               | 305VAC<br>430VDC |
| Input Current                          | 115VAC<br>230VAC         |                  | 70mA<br>45mA         |                  |
| Inrush Current                         | cold start at +25°C      | 115VAC<br>230VAC |                      | 15A<br>30A       |
| No load Power Consumption              | 85-305VAC/ 47-440Hz      |                  |                      | 40mW             |
| Input Frequency Range                  | AC Input                 | 47Hz             |                      | 440Hz            |
| Minimum Load <sup>(7)</sup>            |                          |                  | 10%                  |                  |
| Hold-up Time                           | 115VAC                   | 18ms             |                      |                  |
| Internal Operating Frequency           | 100% load at nominal Vin |                  | 55kHz                |                  |
| Output Ripple and Noise <sup>(5)</sup> | 3.3Vout<br>all others    |                  | 250mVp-p<br>200mVp-p |                  |

**Notes:**

Note4: No line derating required

Note5: Ripple and Noise is the maximum peak-to-peak voltage value measured at the output with a 20MHz bandwidth, at rated line voltage at full load. And with a 47µF low-ESR electrolytic capacitor in parallel with a 0.1µF ceramic capacitor across output

### Efficiency vs. Load



### REGULATIONS

| Parameter                               | Condition                        | Value                   |
|---|----------------------------------|-------------------------|
| Output Voltage Tolerance <sup>(6)</sup> | 3.3Vout                          | ±4.0% typ. / ±8.0% max. |
|   | 5Vout                            | ±3.5% typ. / ±5.0% max. |
|   | 12, 24Vout                       | ±3.0% typ. / ±4.0% max. |
| Line Regulation                         | low line to high line, full load | ±0.7% typ. / ±1.0% max. |
| Load Regulation <sup>(7)</sup>          | 3.3Vout                          | 5.5% typ. / 9.0% max.   |
|   | 5Vout                            | 5.0% typ. / 7.5% max.   |
|   | 12, 24Vout                       | 4.0% typ. / 5.5% max.   |

**Notes:**

Note6: Includes initial voltage accuracy, thermal drift, line regulation and load regulation at rated input voltage and load conditions

Note7: Operation below 10% load will not harm the converter, but specifications may not be met

**Specifications** (measured @ Ta= 25°C, nom. Vin (115/230VAC), full load and after warm-up unless otherwise stated)

**PROTECTIONS**

| Parameter                      | Type                |                     | Value                          |
|--------------------------------|---------------------|---------------------|--------------------------------|
| Short Circuit Protection (SCP) |                     |                     | continuous, automatic recovery |
| Over Voltage Protection (OVP)  | zener diode clamp   |                     | 105% - 150%                    |
| Over Current Limit             |                     |                     | 120% - 190%                    |
| Over Voltage Category          |                     |                     | OVCII                          |
| Isolation Voltage              | I/P to O/P          | tested for 1 minute | 3kVAC                          |
| Isolation Resistance           |                     |                     | 1GΩ min.                       |
| Leakage Current                | 85-305VAC, 47-440Hz |                     | 10μA max.                      |

**Notes:**

Note8: Refer to local wiring regulations if input over-current protection is also required. Recommended fuse: slow blow type



**ENVIRONMENTAL**

| Parameter                                  | Condition                        |       | Value                        |
|--|----------------------------------|-------|------------------------------|
| Operating Temperature Range <sup>(9)</sup> | full load                        |       | -40°C to +75°C               |
|  | refer to derating graph          |       | -40°C to +85°C               |
| Maximum Case Temperature                   |                                  |       | +105°C                       |
| Thermal Impedance                          |                                  |       | 9.5K/W typ.                  |
| Operating Humidity                         | non-condensing                   |       | 5% - 95% RH max.             |
| MTBF                                       | according to MIL-HDBK-217F, G.B. | +25°C | 3554 x 10 <sup>3</sup> hours |
|  |                                  |       | 3219 x 10 <sup>3</sup> hours |

**Notes:**

Note9: At low input voltage (85-140VAC) and temperature below -25°C the RAC03-3.3SER/277 and RAC03-05SER/277, will not start

**Derating Graph**



**Specifications** (measured @ Ta= 25°C, nom. Vin (115/230VAC), full load and after warm-up unless otherwise stated)

### SAFETY AND CERTIFICATIONS

| Certificate Type (Safety)   | Report / File Number | Standard   |
|---|----------------------|--|
| Information Technology Equipment, General Requirements for Safety (CB Scheme) | L0339L26-CB-1-B4     | IEC60950-1:2005 2nd Edition + A2:2013<br>EN60950-1:2006 + A2:2013                    |
| Information Technology Equipment, General Requirements for Safety             | E224736-A24-UL       | UL No. 60950-1, 2nd Edition, 2014<br>CAN/CSA-C22.2 No. 60950-1-07, 2nd Edition, 2014 |
| Household and similar electrical appliances, General requirements             | L0339L26-B2-L        | EN60335-1:2012+A11:2014  |
| EAC Safety of Low Voltage Equipment   | RU-AT.37.02367       | TP TC 004/2011   |
| RoHS2+  |                      | RoHS-2011/65/EU + AM-2015/863  |

| EMC Compliance (Industrial)  | Condition  | Standard / Criterion  |
|--|--|---|
| Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement |  | EN55032:2015, Class B   |
| Information technology equipment - Immunity characteristics - Limits and methods of measurement          |  | EN55024:2010  |
| ESD Electrostatic discharge immunity test  | ±8kV air, ±4kV contact   | EN61000-4-2:2009, Criteria B  |
| Radiated, radio-frequency, electromagnetic field immunity test   | 3V/m   | EN61000-4-3:2006 + A2:2010, Criteria A  |
| Fast Transient and Burst Immunity  | AC Power Port: ±1kV  | EN61000-4-4:2012, Criteria A  |
| Power Magnetic Field Immunity  | 50Hz, 1A/m   | EN61000-4-8:2010, Criteria A  |
| Voltage Dips and Interruption  | Voltage Dips: >95% reduction<br>>30% reduction<br>Interruption: >95% | EN61000-4-11:2004, Criteria A<br>EN61000-4-11:2004, Criteria A<br>EN61000-4-11:2004, Criteria B |
| Limits of Voltage Fluctuations & Flicker   |  | EN61000-3-3:2013  |


| EMC Compliance (Household)  | Condition  | Standard / Criterion   |
|---|--|--|
| Electromagnetic compatibility of multimedia equipment – Emission Requirements                   |  | EN55014-1:2006+A2:2011   |
| Information technology equipment - Immunity characteristics - Limits and methods of measurement |  | EN55014-2:2015   |
| ESD Electrostatic discharge immunity test   | ±8kV Air, ±4kV Contact   | IEC61000-4-2:2008, Criteria A  |
| Radiated, radio-frequency, electromagnetic field immunity test                                  | 3V/m   | IEC61000-4-3:2006 + A2:2010, Criteria A  |
| Fast Transient and Burst Immunity   | AC Power Port +/-1.0kV<br>DC Output +/-0.5kV                         | IEC61000-4-4:2012, Criteria A  |
| Surge Immunity  | AC Power Port L-N +/-2kV<br>DC Output L-N +/-1kV                     | IEC61000-4-5:2014, Criteria B  |
| Immunity to conducted disturbances, induced by radio-frequency fields                           | AC Power Port 3V, DC Output 3V                                       | IEC61000-4-6:2013, Criteria A  |
| Voltage Dips and Interruption   | Voltage Dips: >95% reduction<br>>30% reduction<br>Interruption: >95% | IEC61000-4-11:2004, Criteria B<br>IEC61000-4-11:2004, Criteria C<br>IEC61000-4-11:2004, Criteria C |
| Limits of Harmonic Current Emissions  |  | EN61000-3-2:2014   |
| Limits of Voltage Fluctuations & Flicker  |  | EN61000-3-3:2013   |

### DIMENSION AND PHYSICAL CHARACTERISTICS


| Parameter         | Type            | Value  |
|-------------------|-----------------|--|
| Material          | case<br>potting | black plastic, (UL94V-0)<br>epoxy, (UL94V-0) |
| Dimension (LxWxH) |                 | 50.3 x 50.3 x 11.0mm                         |
| Weight            |                 | 41g typ.                                     |

continued on next page

**Specifications** (measured @ Ta= 25°C, nom. Vin (115/230VAC), full load and after warm-up unless otherwise stated)



Dimension Drawing (mm)

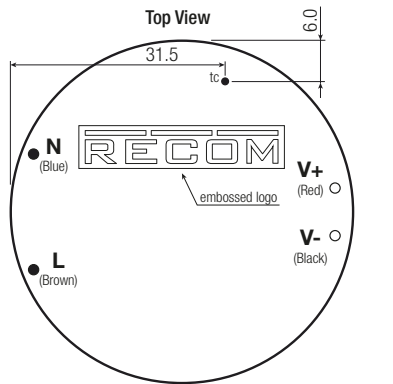




**Wired information**

| # | Function   | Wire color | Type    | AWG |
|---|------------|------------|---------|-----|
| 1 | VAC in (L) | brown      | UL-1015 | 22  |
| 2 | VAC in (N) | blue       | UL-1015 | 22  |
| 3 | +Vout      | red        | UL-1430 | 22  |
| 4 | -Vout      | black      | UL-1430 | 22  |

tc= case temperature measuring point

Tolerance: xx.x= ±0.5mm

xx.xx= ±0.35mm

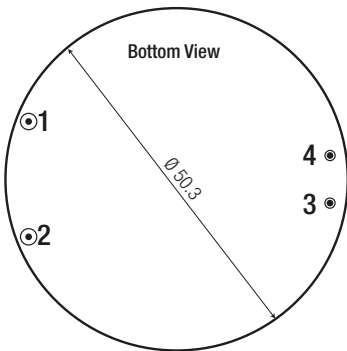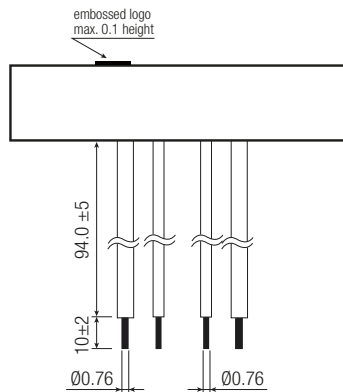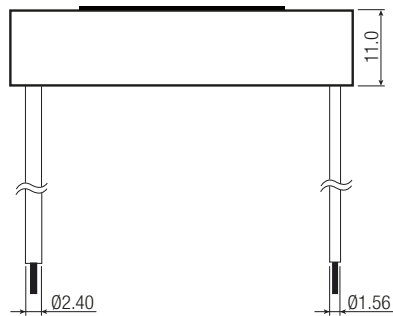

**PACKAGING INFORMATION**

| Parameter                   | Type          | Value                   |
|-----------------------------|---------------|-------------------------|
| Packaging Dimension (LxWxH) | cardboard box | 195.0 x 170.0 x 140.0mm |
|                             | tray          | 462.0 x 292.0 x 49.0mm  |
| Packaging Quantity          | cardboard box | 12pcs                   |
|                             | tray          | 72pcs                   |
| Storage Temperature Range   |               | -40°C to +85°C          |

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## RECOM:

[RAC03-3.3SER/277](#) [RAC03-05SER/277](#) [RAC03-12SER/277](#) [RAC03-24SER/277](#) [RAC03-24SER/277-TRAY](#)  
[RAC03-3.3SER/277-TRAY](#) [RAC03-05SER/277-TRAY](#) [RAC03-12SER/277-TRAY](#)