

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0705550071

Status:

Active

Overview:

SL Modular Connectors

Description:

2.54mm Pitch SL Header, Single Row, Right Angle, 3.05mm Pocket, Shrouded, with Press-fit Plastic Peg, 2 Circuits, 0.76µm Gold (Au) Selective Plating, Tin (Sn) PC Tail Plating

- Documents:
- 3D Model

Drawing (PDF)

Product Specification PS-70400-001 (PDF)

Product Specification PS-70541-001 (PDF)

Product Specification TS-70541-001-001 (PDF)

Product Specification TS-70541-100-001 (PDF)

Packaging Specification PK-70873-0015 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification

CSA

LR19980

UL

E29179

General

Product Family

PCB Headers

Series

70555

Application

Signal, Wire-to-Board

Overview

SL Modular Connectors

Product Name

SL

UPC

800754321303

Physical

Breakaway

No

Circuits (Loaded)

2

Circuits (maximum)

2

Color - Resin

Black

Durability (mating cycles max)

50

Flammability

94V-0

Glow-Wire Capable

No

Guide to Mating Part

Yes

Lock to Mating Part

Yes

Material - Metal

Brass, Phosphor Bronze

Material - Plating Mating

Gold

Material - Plating Termination

Tin

Material - Resin

High Temperature Thermoplastic

Net Weight

0.633/g

Number of Rows

1

Orientation

Right Angle

PC Tail Length

3.30mm

PCB Locator

Yes

PCB Retention

Yes

PCB Thickness - Recommended

1.60mm

Packaging Type

Tube

Pitch - Mating Interface

2.54mm

Plating min - Mating

0.762µm

Plating min - Termination

1.905µm

Polarized to Mating Part

Yes

Shrouded

Fully

Stackable

No


Temperature Range - Operating

-40° to +105°C

Termination Interface: Style

Through Hole

Electrical

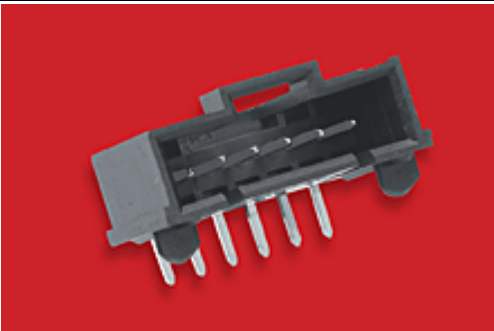

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

REACH SVHC

Not Contained Per -
ED/61/2018 (27 June
2018)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

Search Parts in this Series

70555 Series

Mates With

SL Crimp Housing 70066 Option N, 70066
Option G, 70430 Option G, 70400 Option G

Current - Maximum per Contact	3.0A
Voltage - Maximum	250V
Solder Process Data	
Lead-freeProcess Capability	WAVE
Material Info	
Reference - Drawing Numbers	
Packaging Specification	PK-70873-0015
Product Specification	PS-70400-001, PS-70541-001, TS-70541-001-001, TS-70541-100-001
Sales Drawing	705550000-SD-000

This document was generated on 11/01/2018

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

70555-0071