

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0438100360

Status:

Active

Overview:

Mini-Fit BMI Connectors

Description:

Mini-Fit BMI Header, Dual Row, Right-Angle, 18 Circuits, 6.35mm PCB Thickness, 260C Wave Solderable with Snap-In Metal Pins, PA Polyamide Nylon 4/6, UL 94V-0, with Tin (Sn) Over Nickel (Ni) Plating

Documents:

3D Model

Drawing (PDF)


Product Specification PS-43810-001-001 (PDF)

Product Specification PS-45750-001-001 (PDF)

Packaging Specification PK-43810-001-000 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification	
CSA	LR19980
UL	E29179
General	
Product Family	PCB Headers
Series	43810
3D Viewer	Yes
Application	Board-to-Board, Power, Wire-to-Board
CURRENT-MAX-NUMERIC	13.0
Comments	Current = 13A max. per circuit when header is mated to a receptacle loaded with 45750 Mini-Fit Plus HCS Crimp Terminal Crimped to 16 AWG wire., See Molex product specification PS-45750-001 for additional current de-rating information.
Comments	Current = 13A max. per circuit when header is mated to a receptacle loaded with 45750 Mini-Fit Plus HCS Crimp Terminal Crimped to 16 AWG wire., See Molex product specification PS-45750-001 for additional current de-rating information.
Overview	Mini-Fit BMI Connectors
PITCH-MATING-NUMERIC	4.20
Product Name	Mini-Fit BMI
UPC	822348021369
Physical	
Breakaway	No
Circuits (Loaded)	18
Circuits (maximum)	18
Color - Resin	Black
Durability (mating cycles max)	30
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	Yes
Lock to Mating Part	Yes
Material - Metal	Brass
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	10.930/g
Number of Rows	2
Orientation	Right Angle
PC Tail Length	8.26mm
PCB Locator	Yes
PCB Retention	Yes

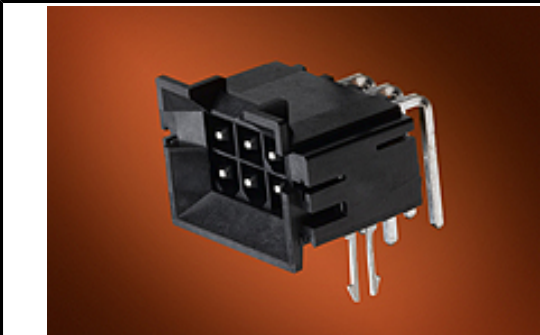

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

REACH SVHC

Not Contained Per -

ED/71/2019 (16 July

2019)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

Search Parts in this Series

43810 Series

Mates With

15060181 Mini-Fit BMI Panel Mount Receptacle, 39012185 Mini-Fit Jr. Receptacle, 15247181 Mini-Fit BMI Receptacle Header, 445160009 Mini-Fit BMI Slide and Lock Panel Mount Receptacle

PCB Thickness - Recommended	6.35mm
Packaging Type	Tray
Pitch - Mating Interface	4.20mm
Pitch - Termination Interface	4.20mm
Plating min - Mating	2.540μm
Plating min - Termination	2.540μm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	Fully
Stackable	No
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	Through Hole
Electrical	
Current - Maximum per Contact	13.0A
Voltage - Maximum	600V AC (RMS)/DC
Solder Process Data	
Duration at Max. Process Temperature (seconds)	005
Lead-freeProcess Capability	WAVE
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	240
Material Info	
Reference - Drawing Numbers	
Packaging Specification	PK-43810-001-000
Product Specification	PS-43810-001-001, PS-45750-001-001
Sales Drawing	SD-43810-071-000

This document was generated on 09/25/2019

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[43810-0360](#)