


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

- NOTES:
1. APPLICATION TOOLS - GS4MT,PPTMT,ST2MT,ST3MT,HTMT
 2. MINIMUM LOOP TENSILE STRENGTH - 200 LBS (889 NEWTONS) WHEN TESTED ON A 1.5" MANDREL
 3. BRACKETS [] DENOTES DIMENSIONS IN MILLIMETERS AND ARE SHOWN FOR REFERENCE ONLY
 4. TOLERANCES:
 .XXX = ±.010 [.25] .XX = ±.02 [.5]
 .X = ±.03 [.8] ANGLES = ±2°
 5. MATERIAL: 304 STAINLESS STEEL

PANDUIT PART NO.	MAX BUNDLE DIAMETER	PACKAGE QTY	LENGTH L=±.3 [7]
MLT1S-CP	1" [25]	100	5.0" [127]
MLT2S-CP	2" [51]	100	7.9" [201]
MLT2.7S-CP	2.7" [69]	100	10.2" [259]
MLT4S-CP	4" [102]	100	14.3" [362]
MLT6S-CP	6" [152]	100	20.5" [521]
MLT8S-CP	8" [203]	100	26.8" [679]
MLT10S-CP	10" [254]	100	33.0" [838]
MLT12S-Q	12" [304]	25	39.3" [998]
MLT14S-Q	14" [355]	25	45.5" [1156]
MLT15S-Q	15" [380]	25	49.2" [1250]
MLT2S-L	2" [51]	50	7.9" [201]
MLT4S-L	4" [102]	50	14.3" [362]

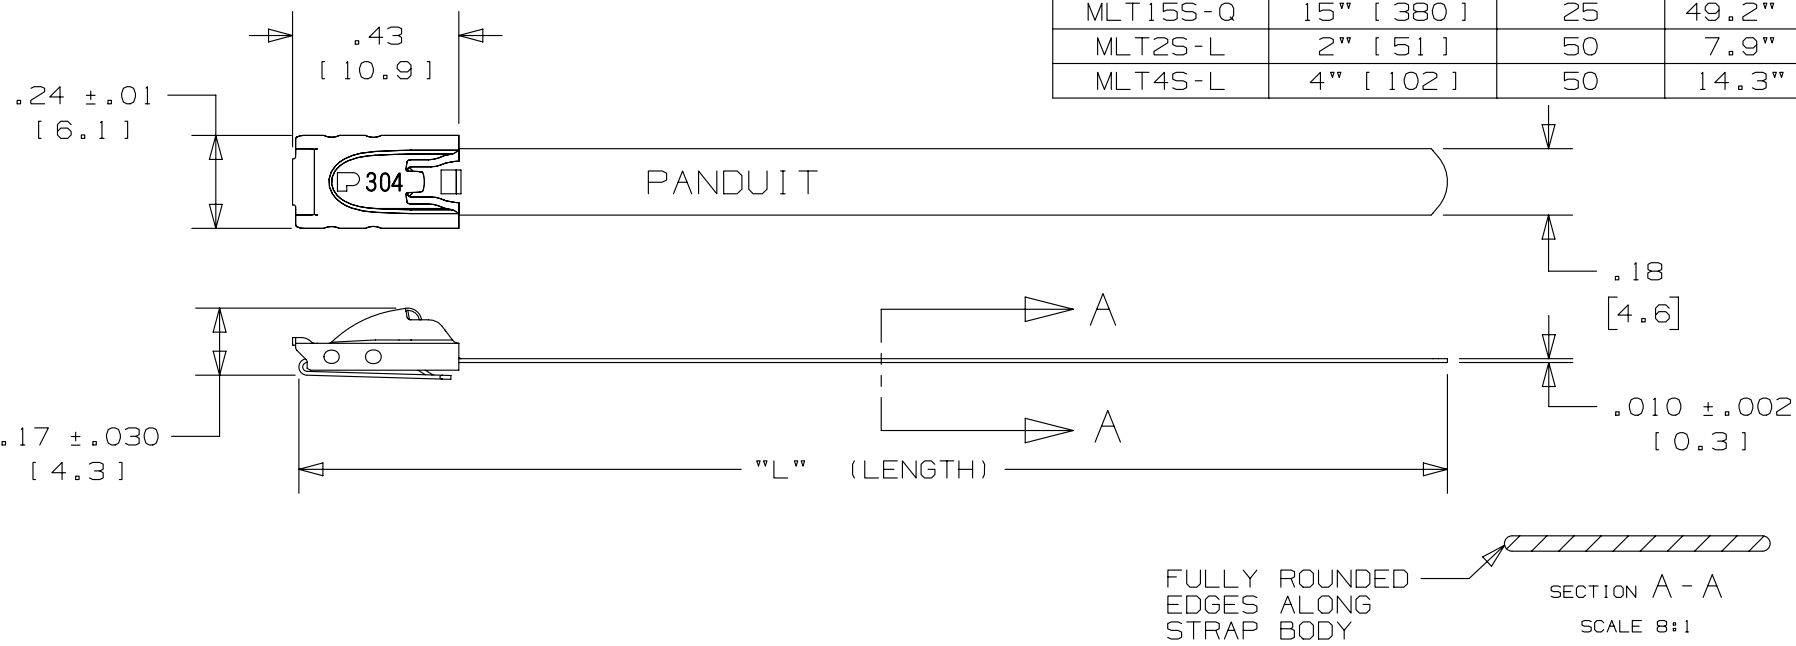

TITLE		METAL LOCKING TIE STANDARD SERIES 304 STAINLESS STEEL		
CUSTOMER DRAWING				
ITEM REVISION NAME		N41119BS/11		
DATASET FILE NAME		N41119BS_DC/11A		
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		MATERIAL: 304 STAINLESS STEEL		
.x ± .1 [2.54] .xxx ± .005 [.127] .xx ± .01 [.25] ANGLES ± 5 °		DRAWING NUMBER: N41119BS_DC		
THIRD ANGLE PROJECTION		SHT 1 OF 1		
DRAWN BY	DATE	CHK	SCALE	SIZE
JAMB	2/12	DPN	2:1	A

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
11A	3/13	JAMB	MIM	RGRO	UPDATE DRAWING TO NEW GLOBAL PANDUIT TITLE BLOCK WITH PANDUIT LOGO	SSECN01037
10A	2/12	MIM	RGRO	---	NOTE #3 METRIC DIMENSIONS NOTED AS BEING SHOWN FOR REFERENCE ONLY	-----

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Panduit:](#)

[MLT2S-CP](#) [MLT4S-CP](#) [MLT6S-CP](#) [MLT1S-CP](#) [MLT10S-CP](#) [MLT2.7S-CP](#) [MLT2S-L](#) [MLT4S-L](#) [MLT8S-CP](#)
[MLT15S-Q](#) [MLT12S-Q](#) [MLT14S-Q](#)