

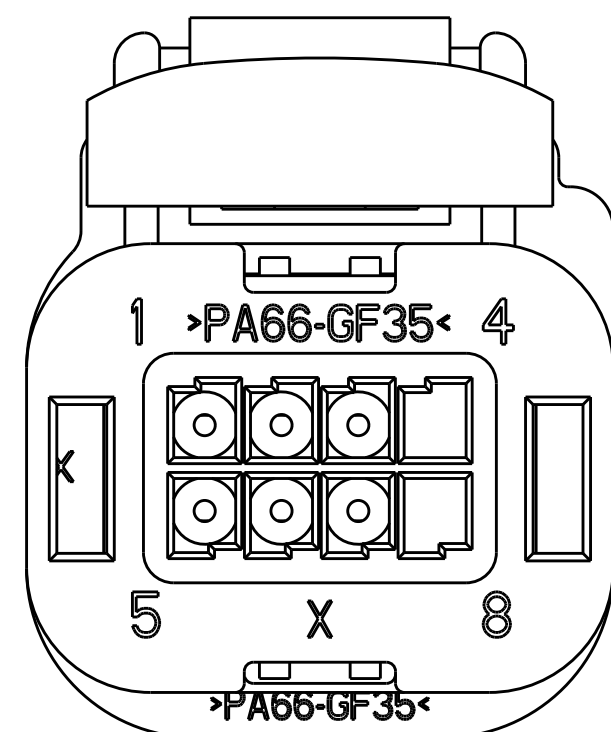


MINIMUM FEED THRU CONDITION
WITH 1mm CLEARANCE ALL AROUND

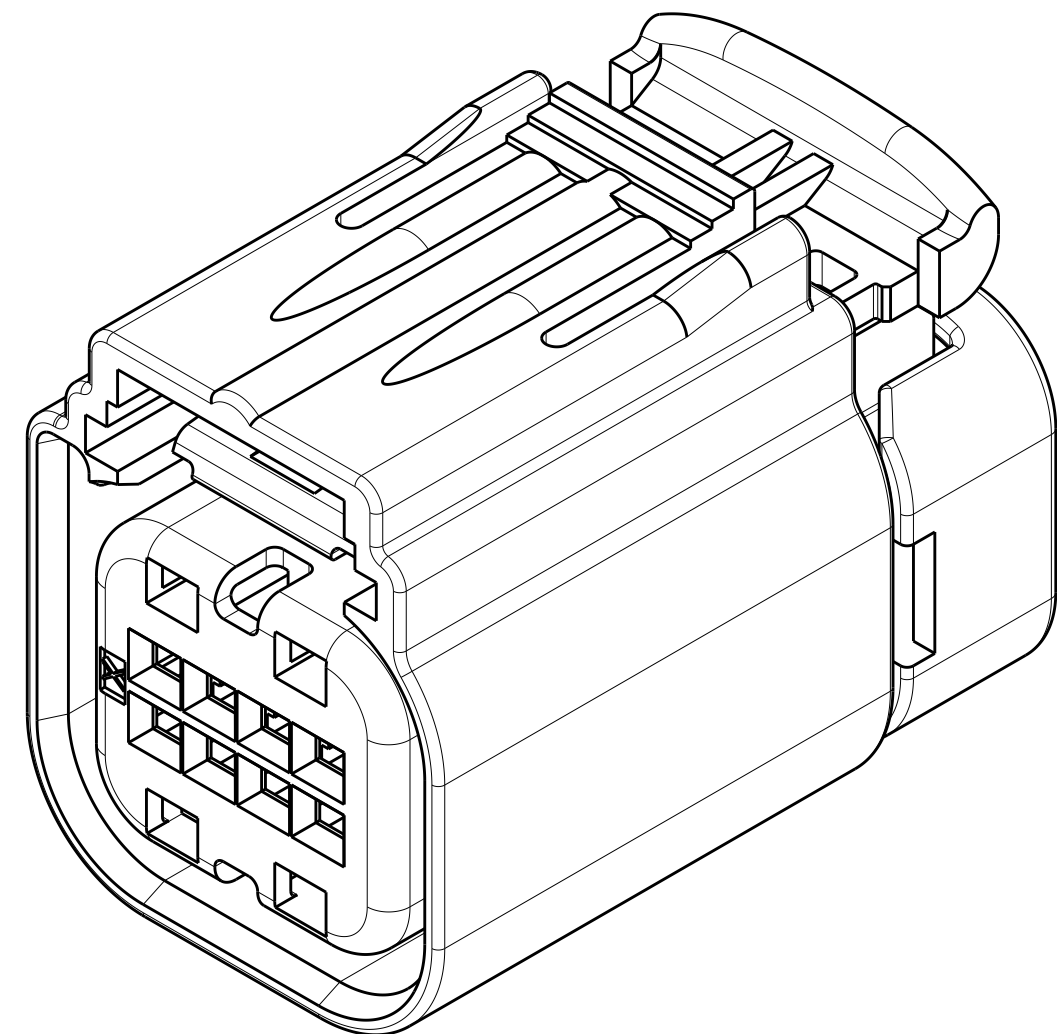



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
J2		REVISED PER ECO-13-008105	14MAY2013	DLD	DCM
J3		REVISED PER ECO-16-010255	12JUL2016	DLD	DCM
J4		REVISED PER ECO-16-012408	29AUG2016	DLD	DCM

COVER CHART													
		3						1-1411001-0	"STANDARD"	>PA66-GF35<			
			5	6	7	8		1411001-9	"STANDARD"	>PA66-GF35<			
		3	4					1411001-8	"STANDARD"	>PA66-GF35<			
			4					1411001-7	"STANDARD"	>PA66-GF35<			
								1411001-6	"STANDARD"	>PA66-GF35<			
		3	4			8		1411001-5	"STANDARD"	>PA66-GF35<			
			4			8		1411001-4	"WIRESHIELD COMPATIBLE"	>PA66-GF35<			
								1411001-3		>PA66-GF35<			
			4			8		1411001-2	"STANDARD"	>PA66-GF35<			
								1411001-1		>PA66-GF35<			
1	2	3	4	5	6	7	8	ASSEMBLY PART NUMBER	COVER TYPE	MATERIAL			
TERMINAL POSITION													
CAVITIES WITH A NUMBER INDICATES CLOSED TERMINAL HOLE LOCATIONS													
BLANK CAVITIES INDICATE OPEN TERMINAL HOLE LOCATIONS													

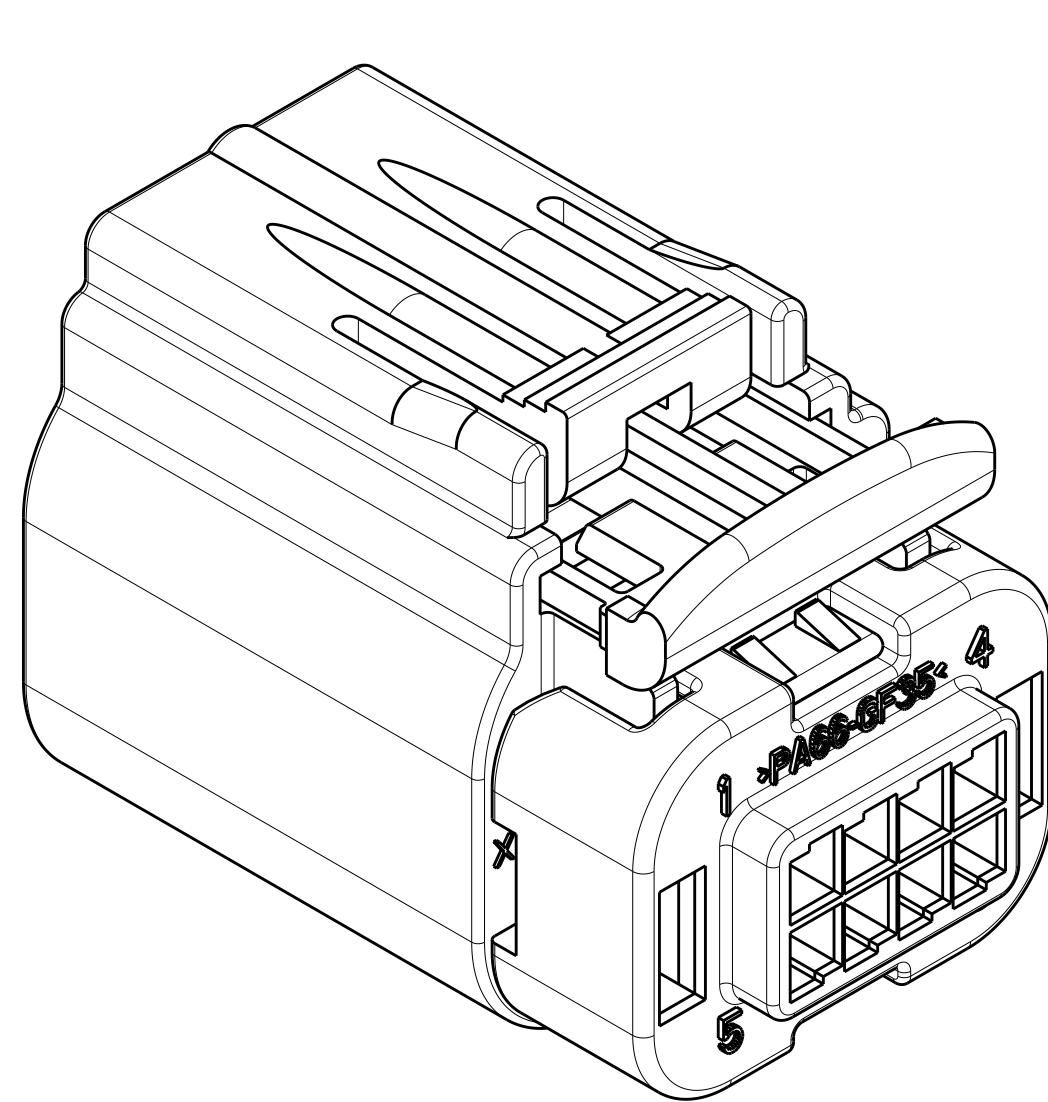

KEYING OPTION "B" SHOWN
SEE NOTE 5 FOR APPLICABLE
HEADER INTERFACE INFORMATION

1. APPLICABLE TERMINAL PART NUMBERS (SOLD SEPARATELY):
FOR TIN APPLICATIONS: 1393367 AND 1393366.
FOR GOLD APPLICATIONS: 1393365 AND 1393364.
FOR TERMINATION AND REELING OPTIONS
SEE DRAWINGS 1393367, 1393366, 1393365, AND 1393364.
2. COMPATIBLE WIRE SIZES FOR MAT SEAL DESIGN 1.19 TO 2.06 O.D.
(22-18 AWG, 0.35-0.75 mm²)
3. TPA IS SHIPPED IN PRE-LOADED POSITION. SOME TPA'S MAY BECOME FULLY
SEATED DURING SHIPPING. USE TYCO INSTRUCTION SHEET 408-10128 TO
REPOSITION TPA TO IT'S PRE-LOADED POSITION.
4. TE CONNECTIVITY ASSEMBLY PART NUMBER (X-XXXXXX-X) AND TRACEABILITY CODE
(YY = TWO DIGIT YEAR, JJJ = JULIAN DAY, HH = TWO DIGIT MILITARY HOUR)
ARE PRINTED IN THIS LOCATION.
5. APPLICABLE HEADER INTERFACE DRAWING 1488342 IS AVAILABLE UPON REQUEST.
A COPY OF THIS DRAWING CAN BE OBTAINED FROM THE TE CONNECTIVITY (TE)
PRODUCT MANAGER, VIA YOUR TE SALES REPRESENTATIVE OR CUSTOMER SERVICE.
6. ASSEMBLIES ARE BULK PACKAGED.
7. OPTIONAL CPA IS SHIPPED IN IT'S PRE-LOADED POSITION.

<--- ASSEMBLY PART NUMBERS																
1-1411001-0	1	-	-	-	1	-	-	-	-	-	6	CPA	RED	PBT-GF15		
1411001-9	1	1	1	1	1	1	1	1	1	1	5	PERIMETER SEAL	LIGHT GREEN	SILICONE		
1411001-8	1	1	1	1	1	1	1	1	1	1	4	GROMMET	BROWN	SILICONE		
1411001-7	-	-	-	-	-	-	1	1	-	-	3	WIRE COVER	BLACK	LCP-GF30		
1411001-6	1	1	1	1	1	1	-	-	1	1			BLACK	PA66-GF35		
1411001-5	1	1	1	1	1	1	1	1	1	1	2	TPA	RED	PBT+PC-GF30		
1411001-4	1	1	1	1	1	1	1	1	1	1	1	PLUG "B"	BLACK	PA66-GF35		
QUANTITY											ITEM	DESCRIPTION	COLOR	MATERIAL		
THIS DRAWING IS A CONTROLLED DOCUMENT.											DWN M. HITCHCOCK 12OCT2001	<div> TE Connectivity</div> <div>2x4 SEALED, FEMALE PLUG ASSEMBLY CUSTOMER SPEC.</div>				
DIMENSIONS:											CHK M. FORISKA 12NOV2001					
mm											APVD A. SHUMAN 12NOV2001					NAME
											PRODUCT SPEC					
											APPLICATION SPEC					
TOLERANCES UNLESS OTHERWISE SPECIFIED:											114-13150	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
0 PLC ±.3											CUSTOMER DRAWING	A1	00779	C=1411001	-	
2 PLC ±0.10																
3 PLC ±.1																
4 PLC ±.1																
ANGLES ±.3°																
FINISH											WEIGHT					
-																

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1411001-2](#)