
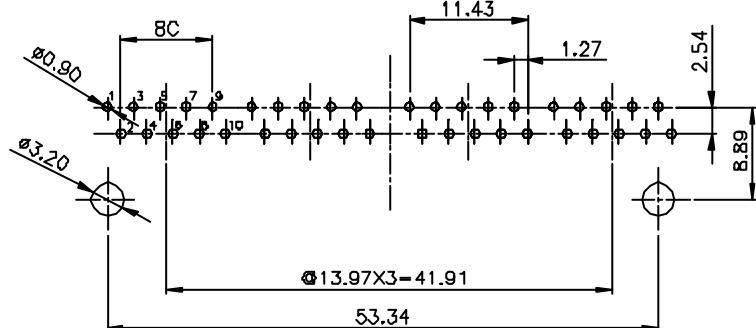
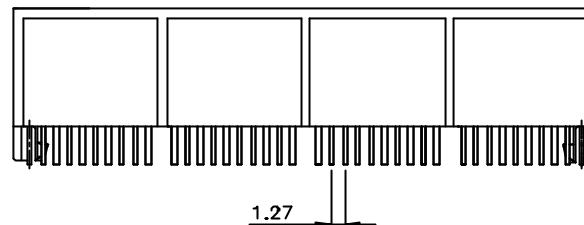
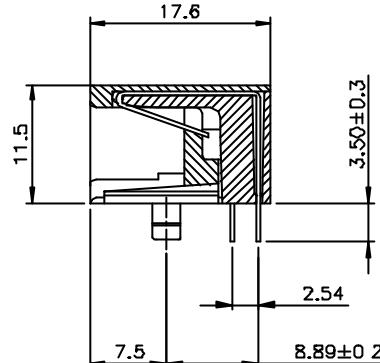


A1RFRD10

REVISION RECORD

REV	ECD	DESCRIPTION	DRFT	CHKD

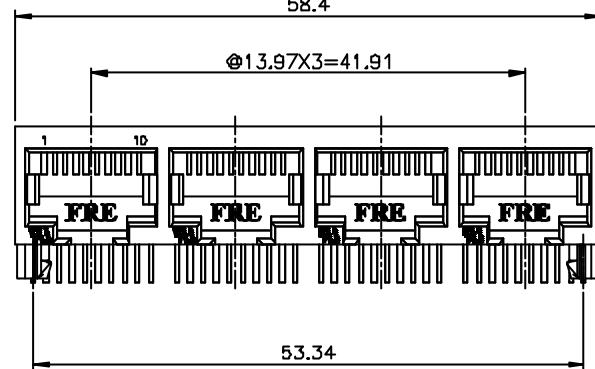

PCB Layout t=1.6MM
Component Side Shown

NOTES:

ELECTRICAL:

1. VOLTAGE RATING: 125 VAC RMS.
2. CURRENT RATING: 1.5 AMP.
3. CONTACT RESISTANCE: 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH: 1000 VAC RMS 60Hz. 1MIN.

MECHANICAL:

1. HOUSING MATERIAL: GLASS FILLED POLYESTER UL 94V-0.
2. CONTACT MATERIAL: PHOSPHOR BRONZE Ø0.46MM
3. PLATING: GOLD PLATING OVER NICKEL.
4. OPERATING LIFE: 750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER: 1 LB MIN
6. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

1. STORAGE: -40°C TO +85°C.
2. OPERATION: -40°C TO +85°C.

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

CUL FILE NO. E163191

PART NUMBER: E560X-00C06X

NO. OF CONTACT
8-8 CONTACTS
1- 10 CONTACTS

1- 3u" 2- 6u" 3-15u"
4-30u" 5-50u" 6-Pd20u"

DETACHED LISTS	IN (INCH)	DFTD RIK	DATE 12/23/03'
		CHENG MING-WEI	DATE 12/23/03'
		MFD LNJ	DATE 12/23/03'
		APPY YUAN	DATE 12/23/03'
	MM	MATERIAL :	
D Ø 2	±		
DC Ø 15	±		
.000 Ø 0.075	±		
ANGLES ± 0.5	QT'Y :		
THIRD ANGLE PROJECTION	FINISH		
	SCALE : 2:1		
	DO NOT SCALE DRAWING	SHEET 1	OF 1
		SIZE A3	REV 0
		TITLE 11.5 SIDE ENTRY	
		PCB GANG JACK 10P	
		DRAWING NO. GE563A88	
		/PART NO. SEE NOTE	

8 7 6 5 4 3 2 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse:

[E5608-00C062-L](#)